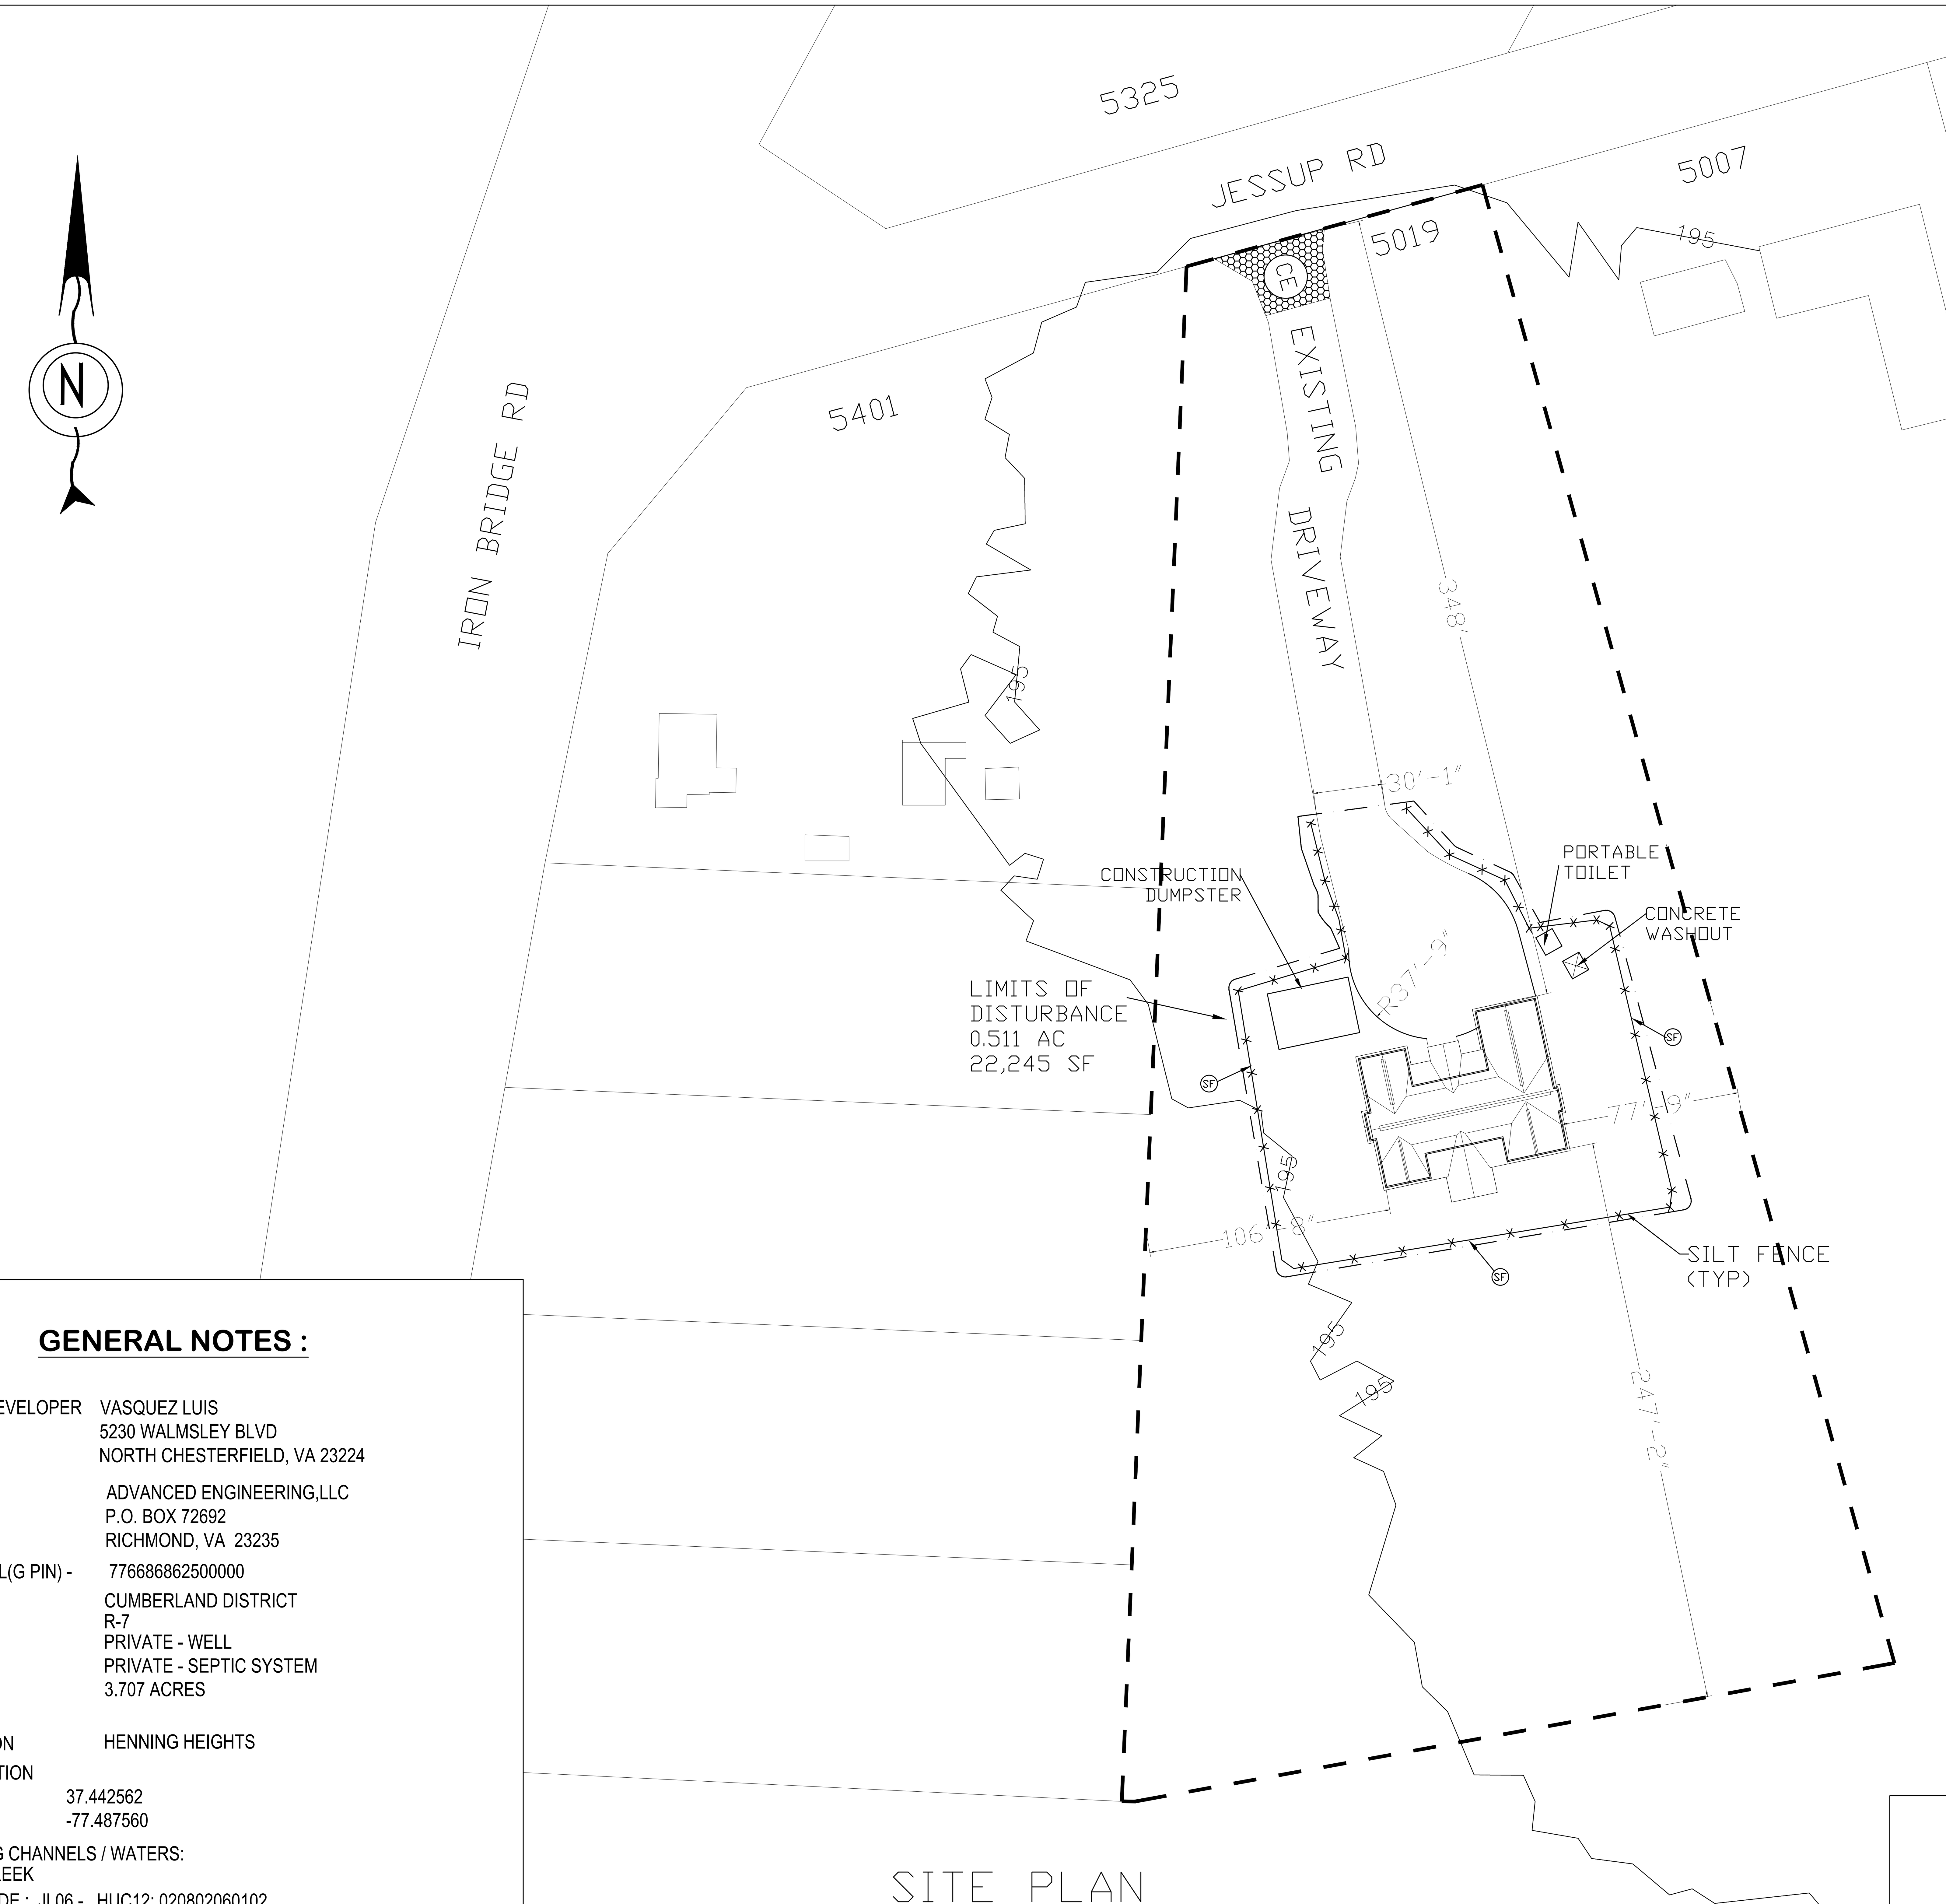


SITE PLAN

1" = 40'-0"

40 20 0 40 80 120

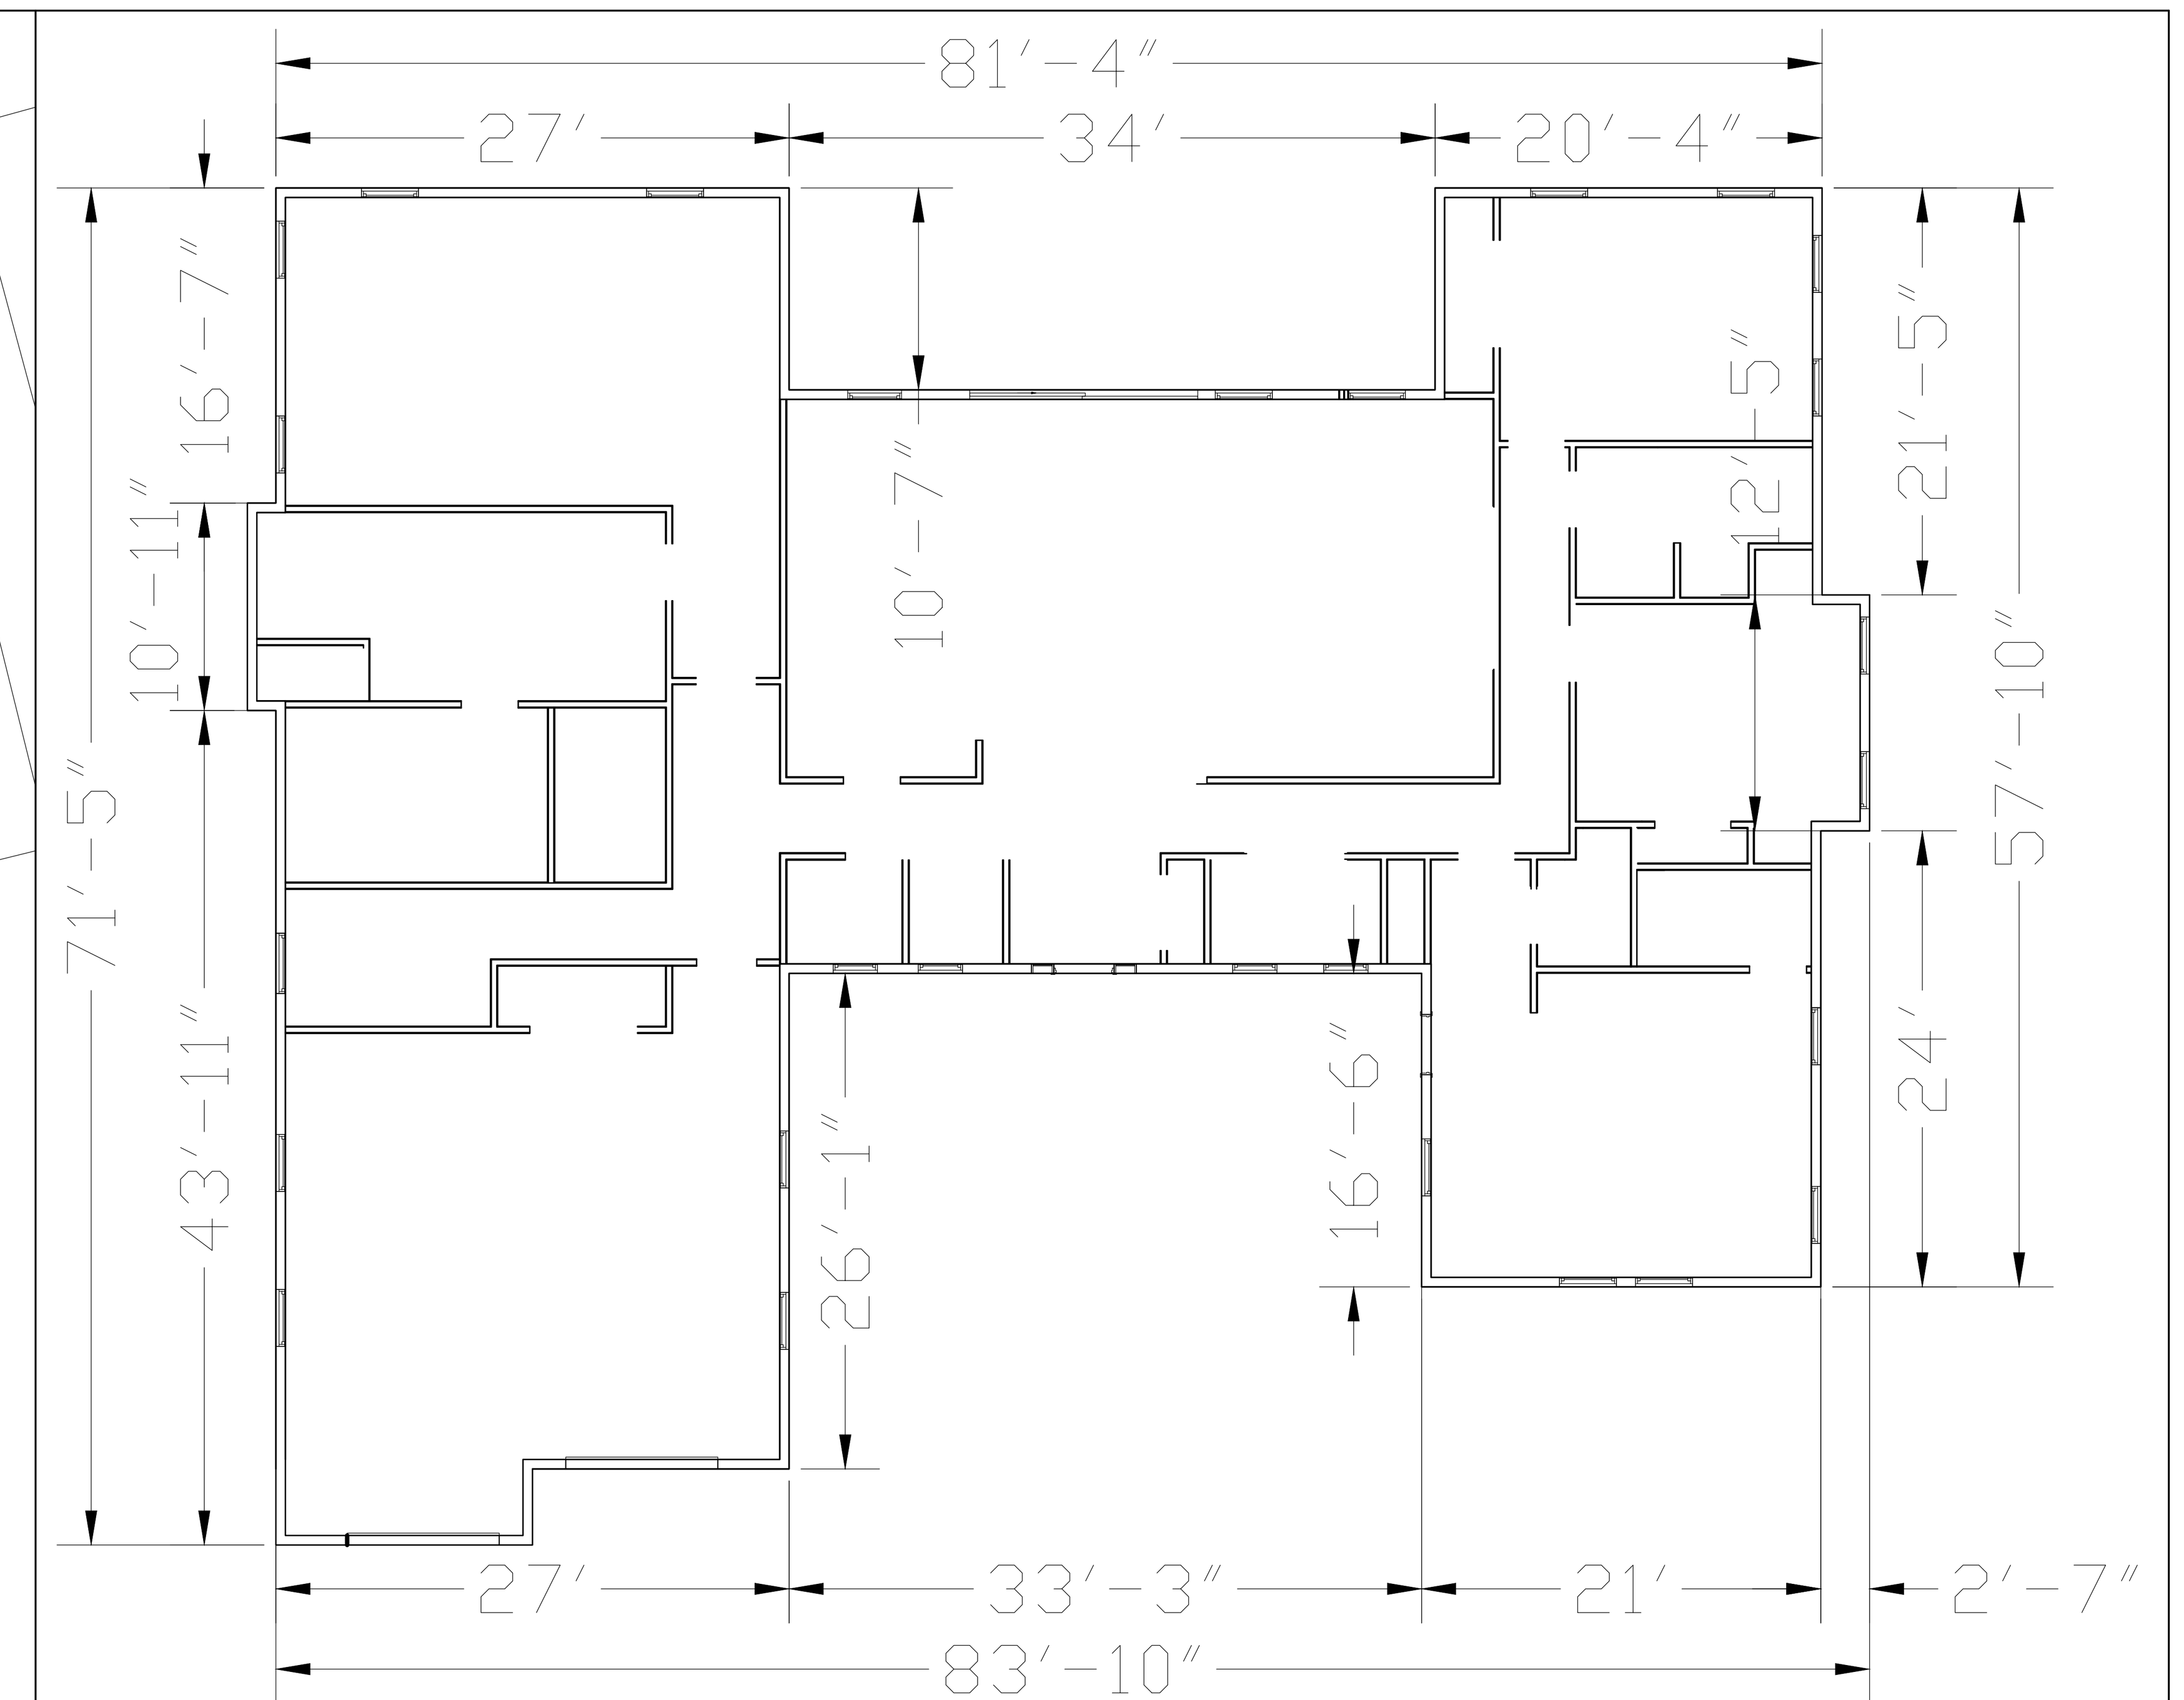


HOUSE FOOTPRINT

1" = 10'-0"

The location of existing utilities, both overhead and underground, may not be shown on these plans. Where structures are shown, their location may only be assumed to be approximate. The contractor shall be liable for damage done to structures or property through negligence or carelessness. The contractor shall verify the location of all structures and utilities in the construction area prior to starting work. For assistance in locating utilities, call "MISS UTILITY" at 1-800-552-7001. The contractor is to contact the designer immediately in the event that a location or an elevation differs significantly from that shown on the plans.

## HOUSE GRADING NOTE:

PLEASE NOTE THAT THERE MUST BE A 5% FINISHED GRADE SLOPING AWAY FROM THE BUILDING ON ALL SIDES

## E&S LEGEND / ESTIMATE

| KEY | DESCRIPTION | SYMBOL | QUAN. |
|---|---|---|---|
| | EXISTING CONTOURS | 100 | |
| | PROPOSED CONTOURS | 100 | |
| CE | CONSTRUCTION ENTRANCE | | 1 EA. |
| SF | SILT FENCE | x—x—x—x—x | 694 LF |
| LD | LIMITS OF DISTURBANCE/CLEARING | | 0.511 AC |
| PS | PERMANENT SEEDING | PS | |
| TS | TEMPORARY SEEDING | TS | |
| MU | MULCHING | MU | |
| TP | TREE PROTECTIONS | TP | |

## GENERAL NOTES :

1. OWNER / DEVELOPER VASQUEZ LUIS
   5230 WALMSLEY BLVD
   NORTH CHESTERFIELD, VA 23224
2. ENGINEER ADVANCED ENGINEERING,LLC
   P.O. BOX 72692
   RICHMOND, VA 23235
3. TAX PARCEL(G PIN) - 776686862500000
4. DISTRICT CUMBERLAND DISTRICT
5. ZONING R-7
6. WATER PRIVATE - WELL
   SEWER PRIVATE - SEPTIC SYSTEM
7. LAND AREA 3.707 ACRES
8. SUBDIVISION HENNING HEIGHTS
9. SITE LOCATION
   LAT 37.442562
   LONG -77.487560
10. RECEIVING CHANNELS / WATERS:
    FALLING CREEK
11. VAHU6 CODE : JL06 - HUC12: 020802060102
12. SOILS: 82B—KEMPSVILLE-BOURNE-COMPLEX, 2 TO 6 PERCENT SLOPES
    HYDROLOGIC SOIL GROUP: B
13. DISTURBED AREA : 27,931 SF - 0.641 AC
14. BUILDING SQ FT : 4,098 SF (PROPOSED)

| NO. | DATE | BY | REVISION |
|---|---|---|---|

| | |
|---|---|
| SHEET TITLE: SITE PLAN | PROJECT NO. |
| | SCALE: AS SHOWN |
| | DATE: 2/18/25 |
| PROJECT: NEW SFD – VASQUEZ RESIDENCE<br>5019 JESSUP RD<br>RICHMOND, VA 23234 | DRAWN BY: JK |
| | CHECKED BY: JK |
| LUIS VASQUEZ | DRAWING NO. 072 01 |
| E-Mail: AdvEngrLLC@GMail.com | |

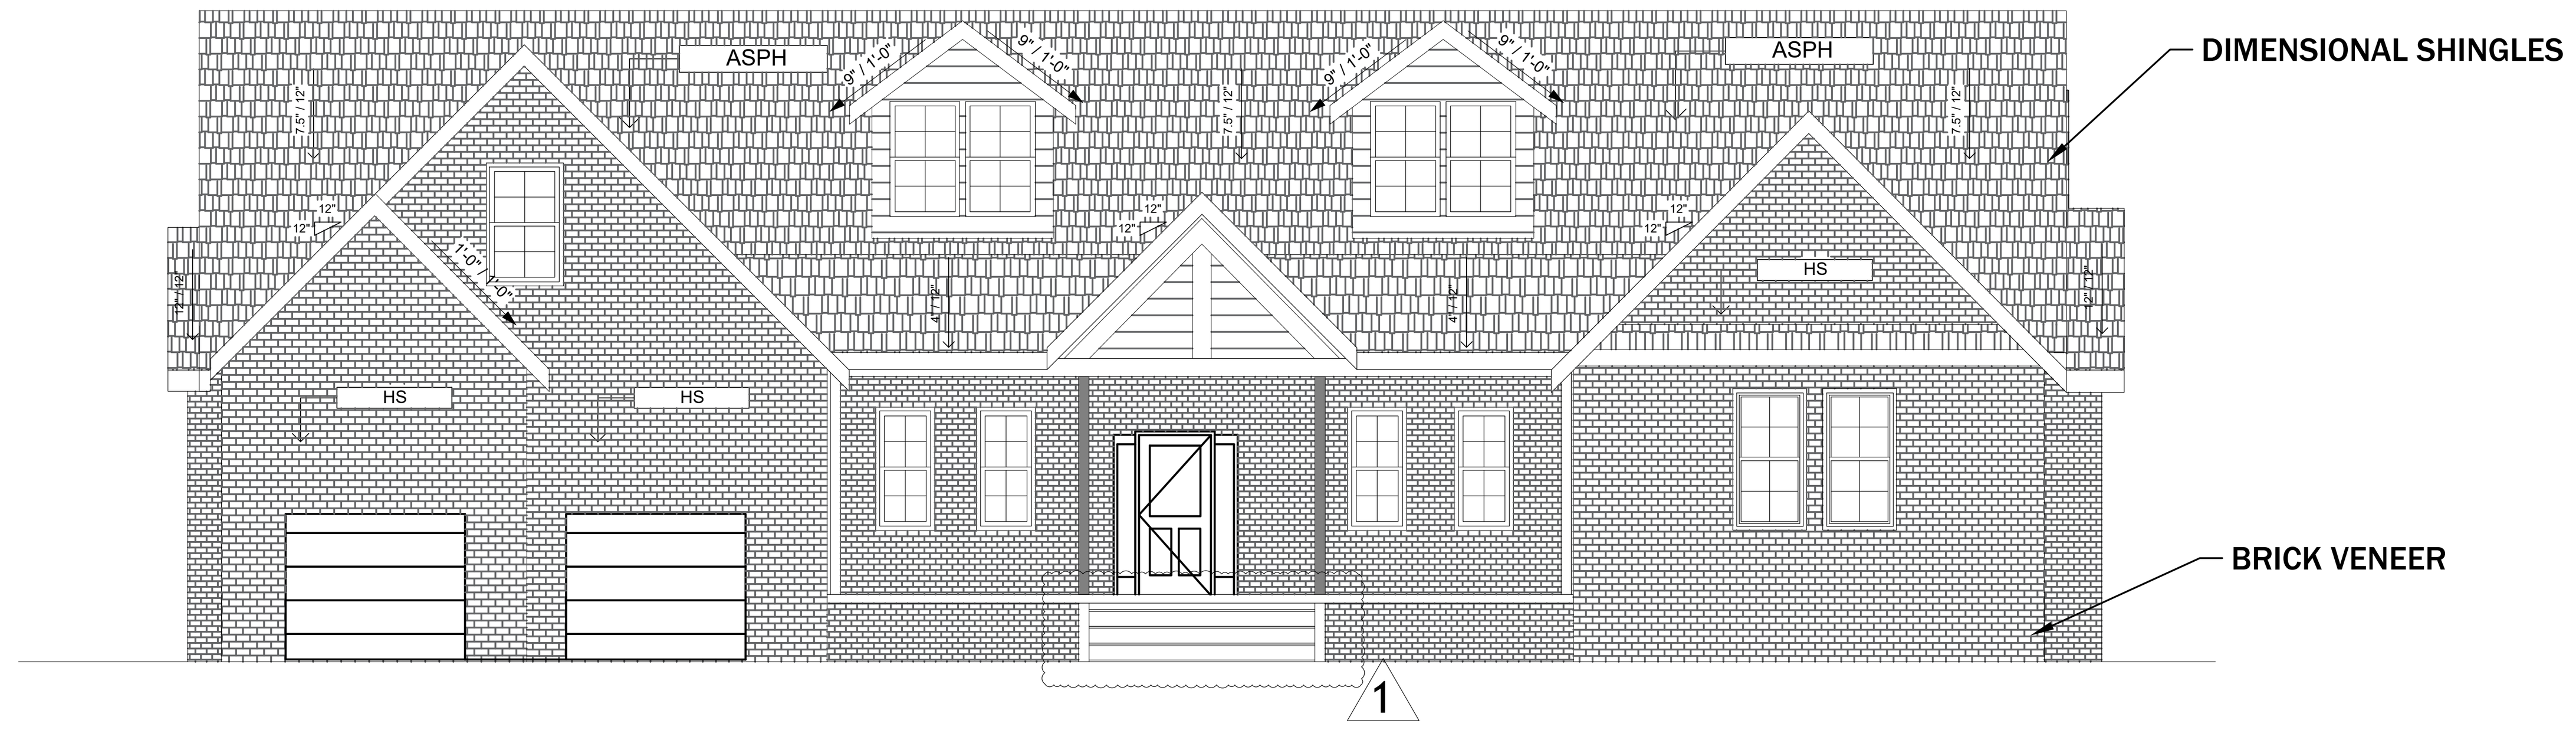


## 1 FRONT ELEVATION

SCALE: 3/16" = 1'

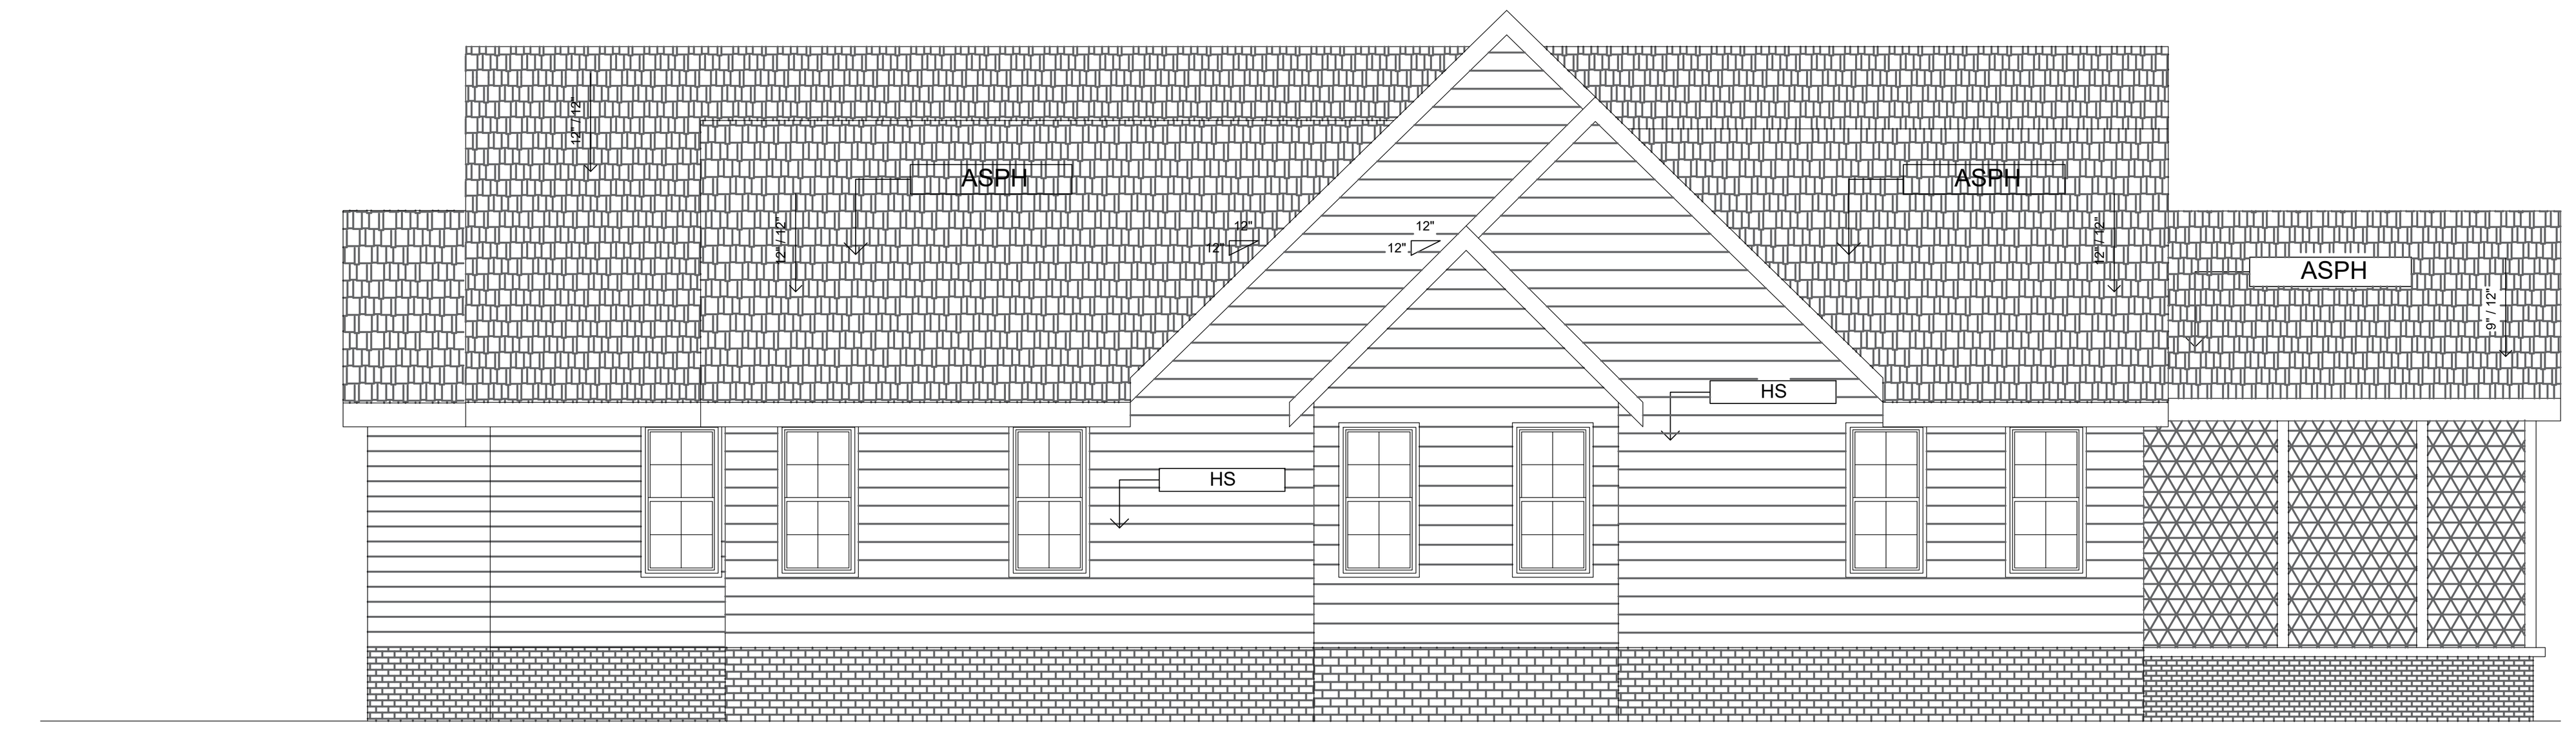


## 3 RIGHT ELEVATION

SCALE: 3/16" = 1'

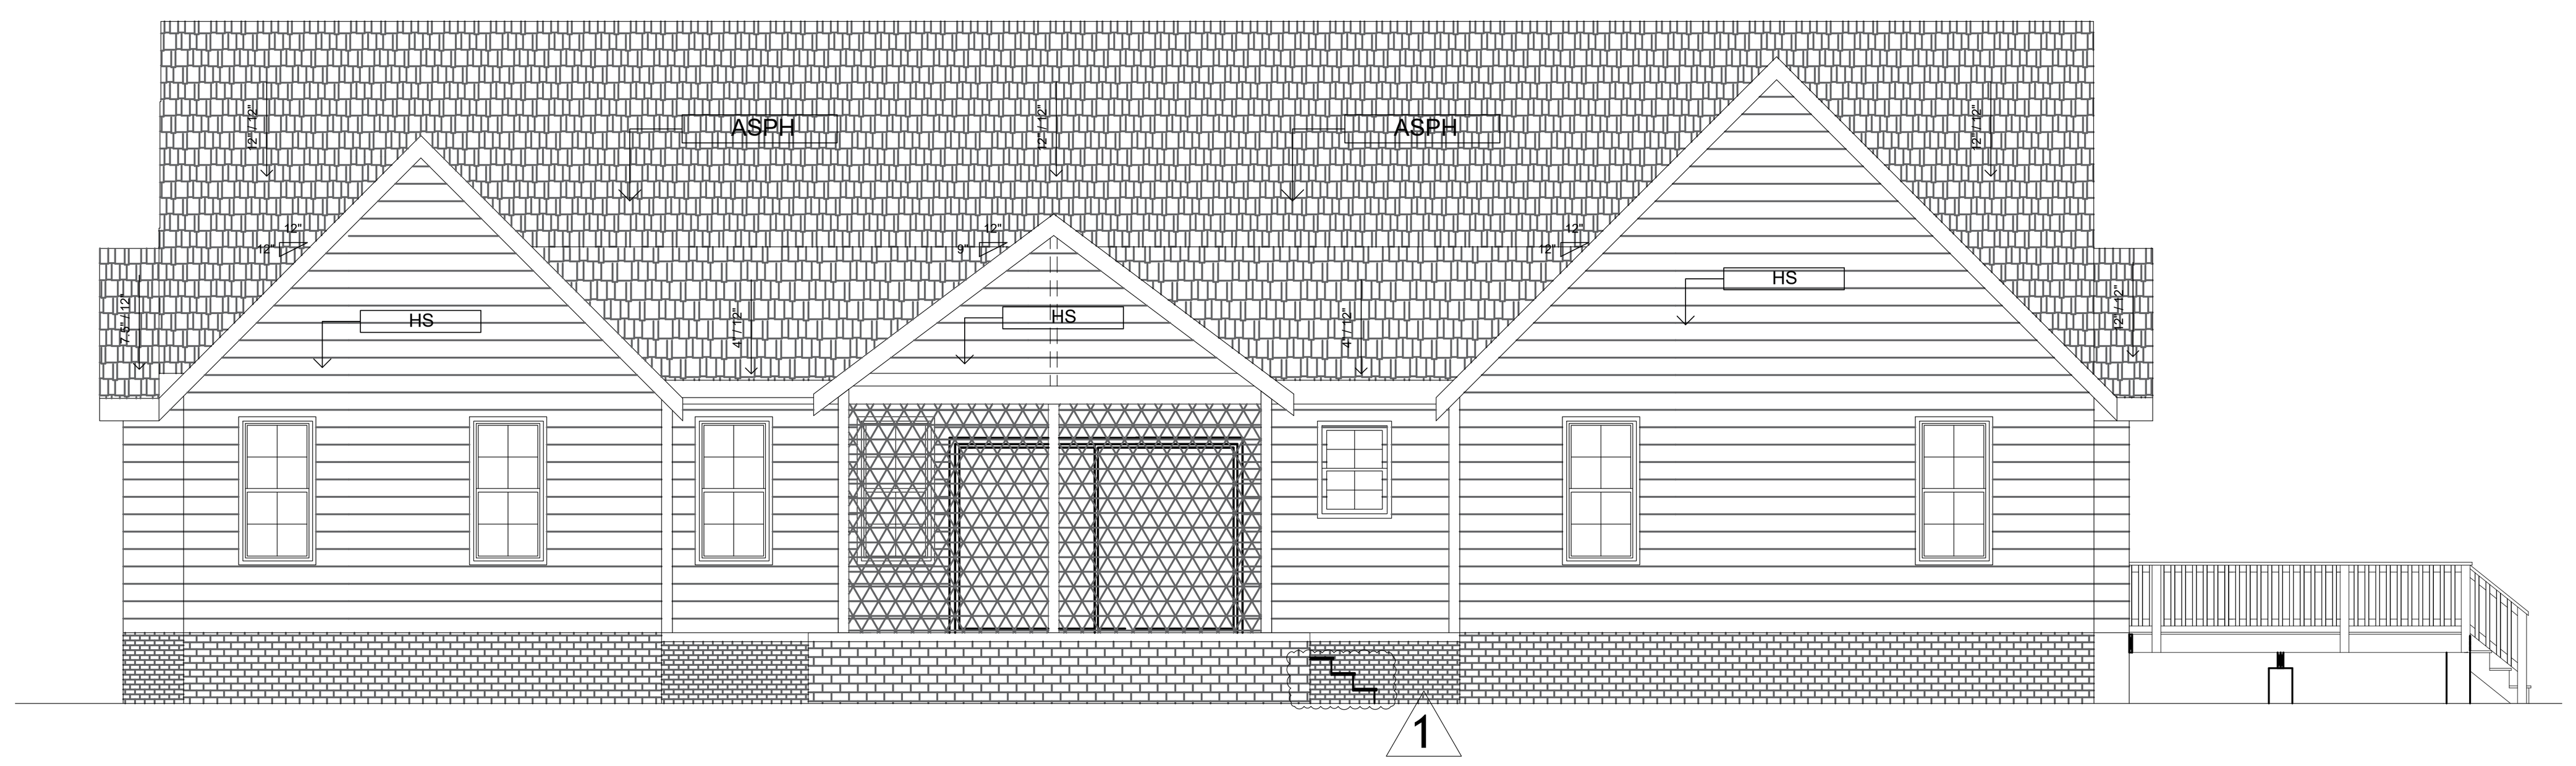


## 2 REAR ELEVATION

SCALE: 3/16" = 1'


## 4 LEFT ELEVATION

SCALE: 3/16" = 1'

ELEVATION NOTES:
1. # OF STEPS DEPENDENT ON GRADE
2. GRADING LINE ON PLANS IS NOT AN ACCURATE REPRESENTATION OF THE EXISTING LOT. GRADE TO BE VERIFIED IN FIELD. HOUSE MAY CHANGE DUE TO EXISTING CONDITIONS
3. ALL BRACKETS, ETC. MOUNTED ONTO EXTERIOR SHALL BE ATTACHED BY MOUNTING BLOCKS OR PVC.
4. ALL FASCIA AND RAKE BOARD TO BE 2X6, WRAPPED ALUMIN. AND INSTALLED BY FRAMERS (UNLESS NOTED OTHEWISE)
5. FRAMER TO PROPERLY FLASH AND INSTALL BAND/LEDGER BOARD FOR ALL DECKS/STOOPS.
6. ALL EXTERIO VENTS TO MATCH.

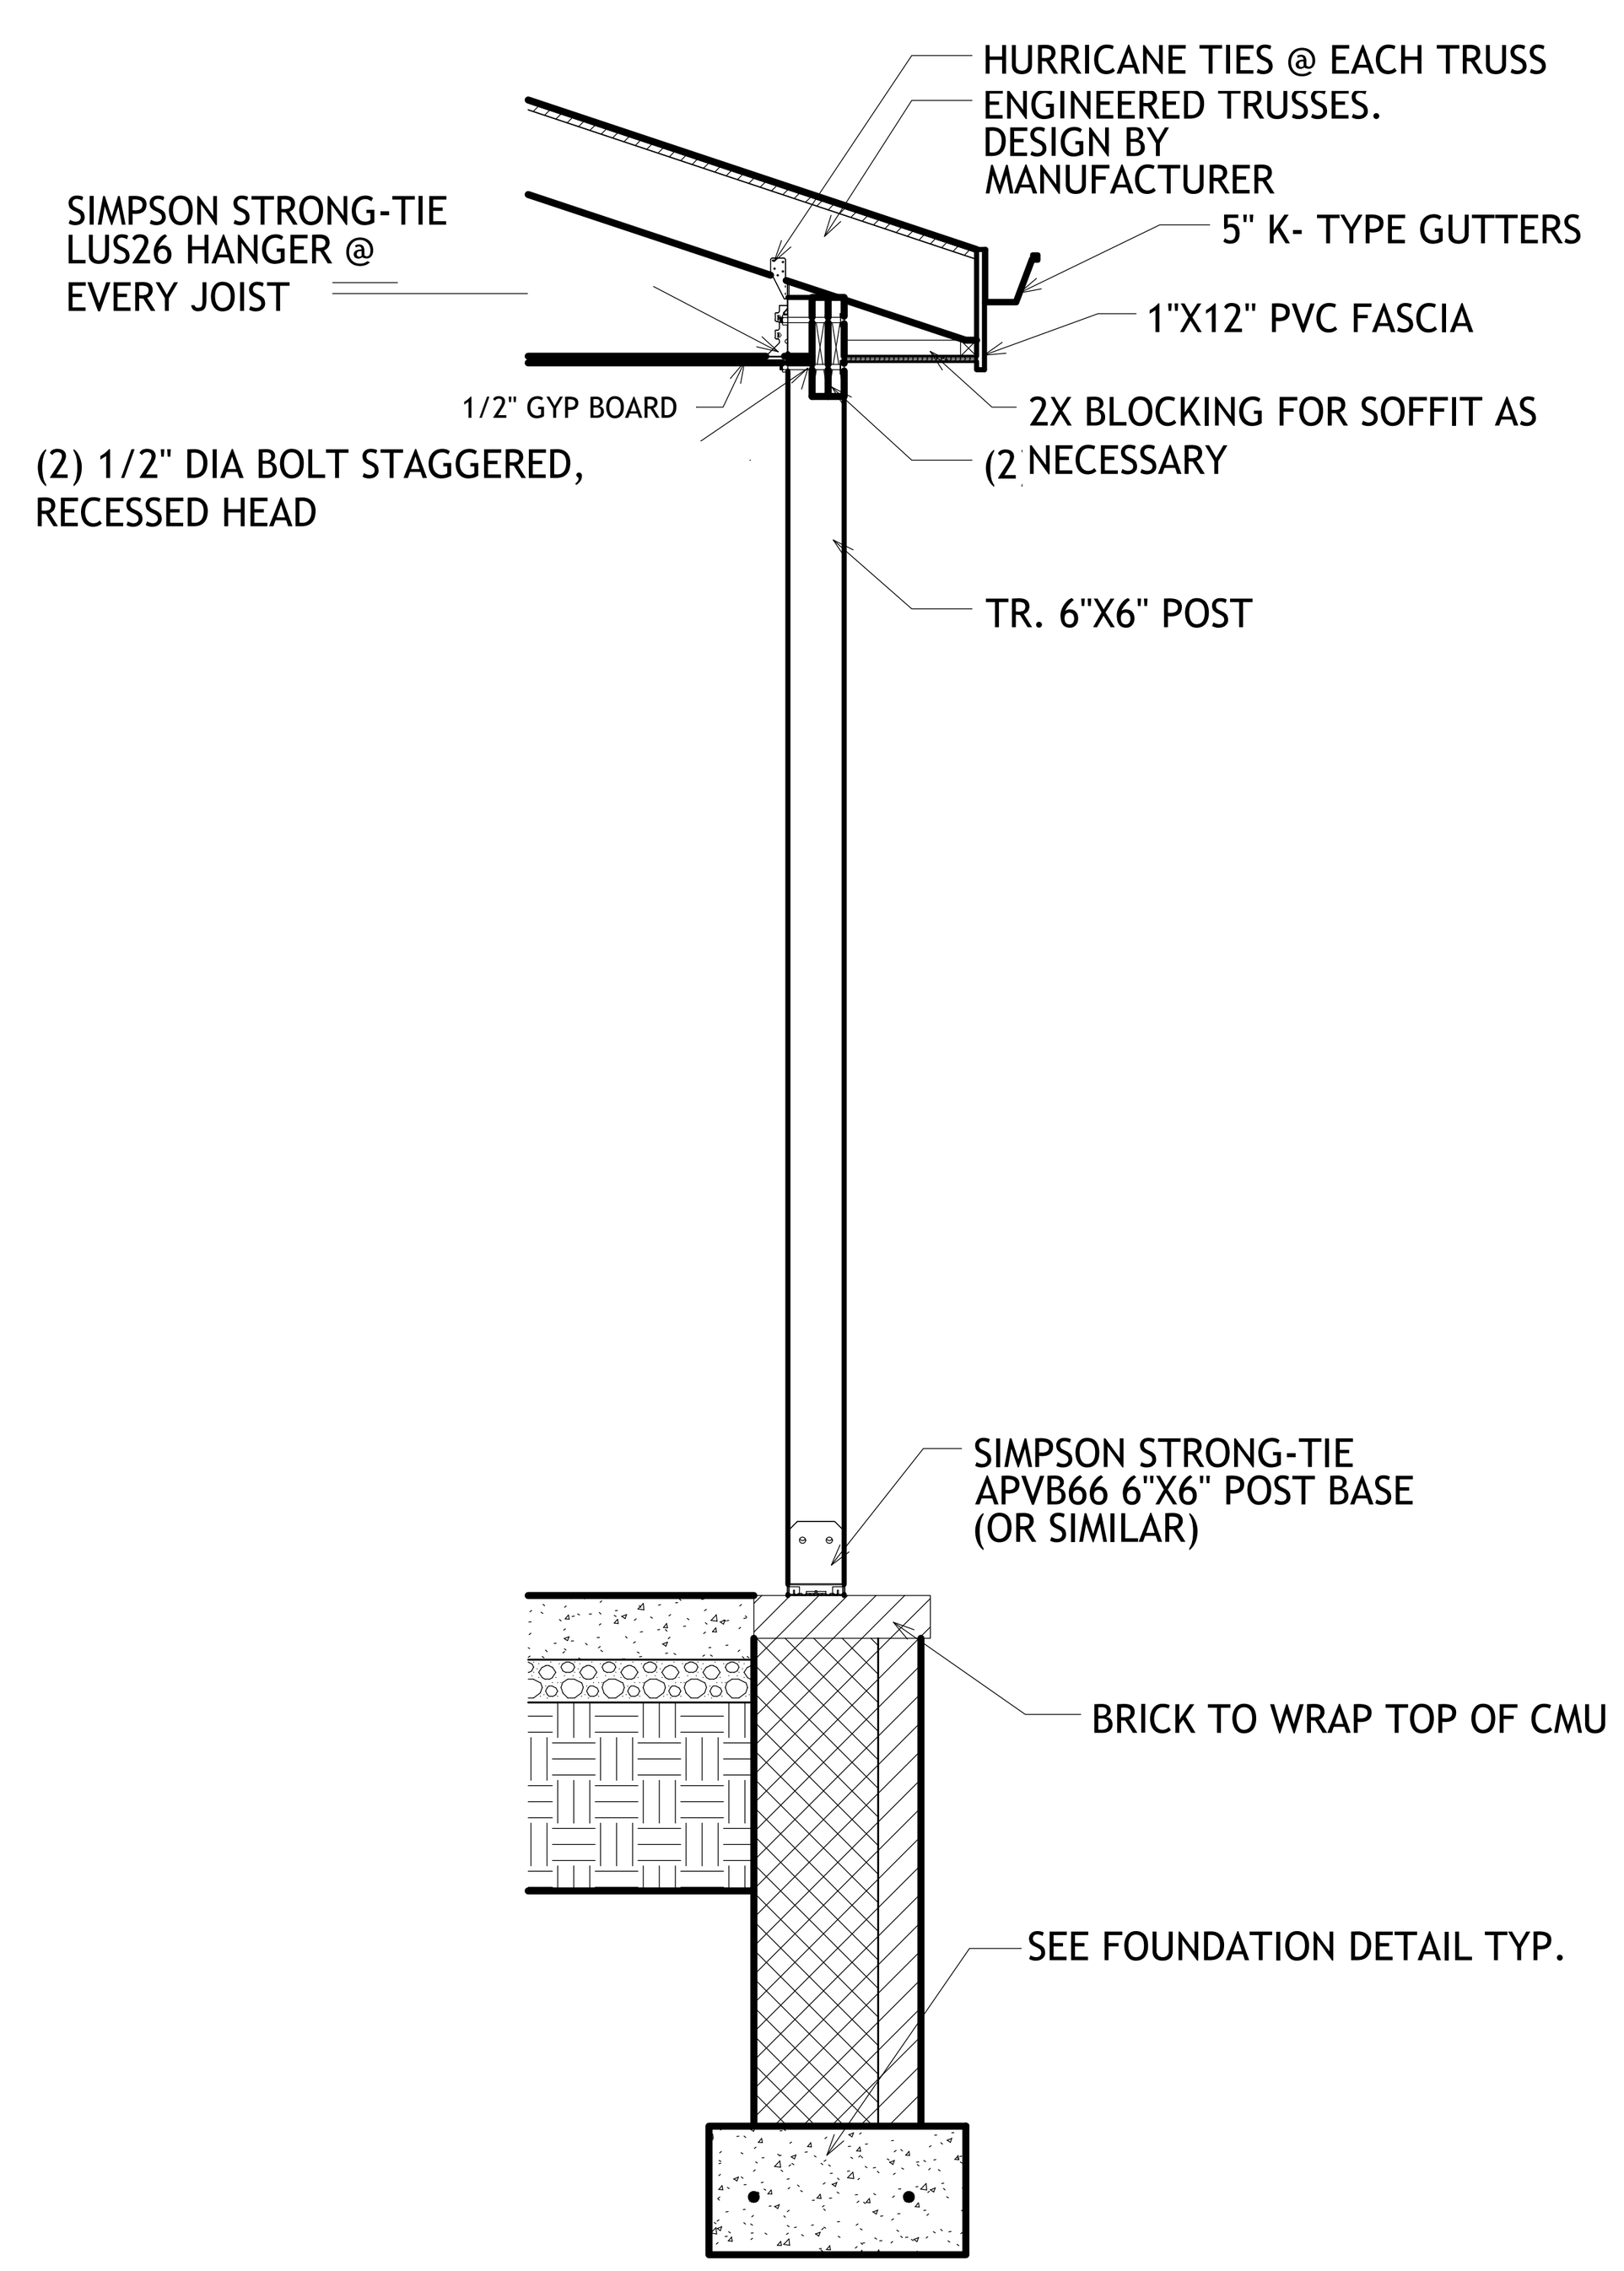


## 5 BACK PORCH POST ATTACHMENT AND ROOF DETAIL

SCALE: 1/2"= 1'

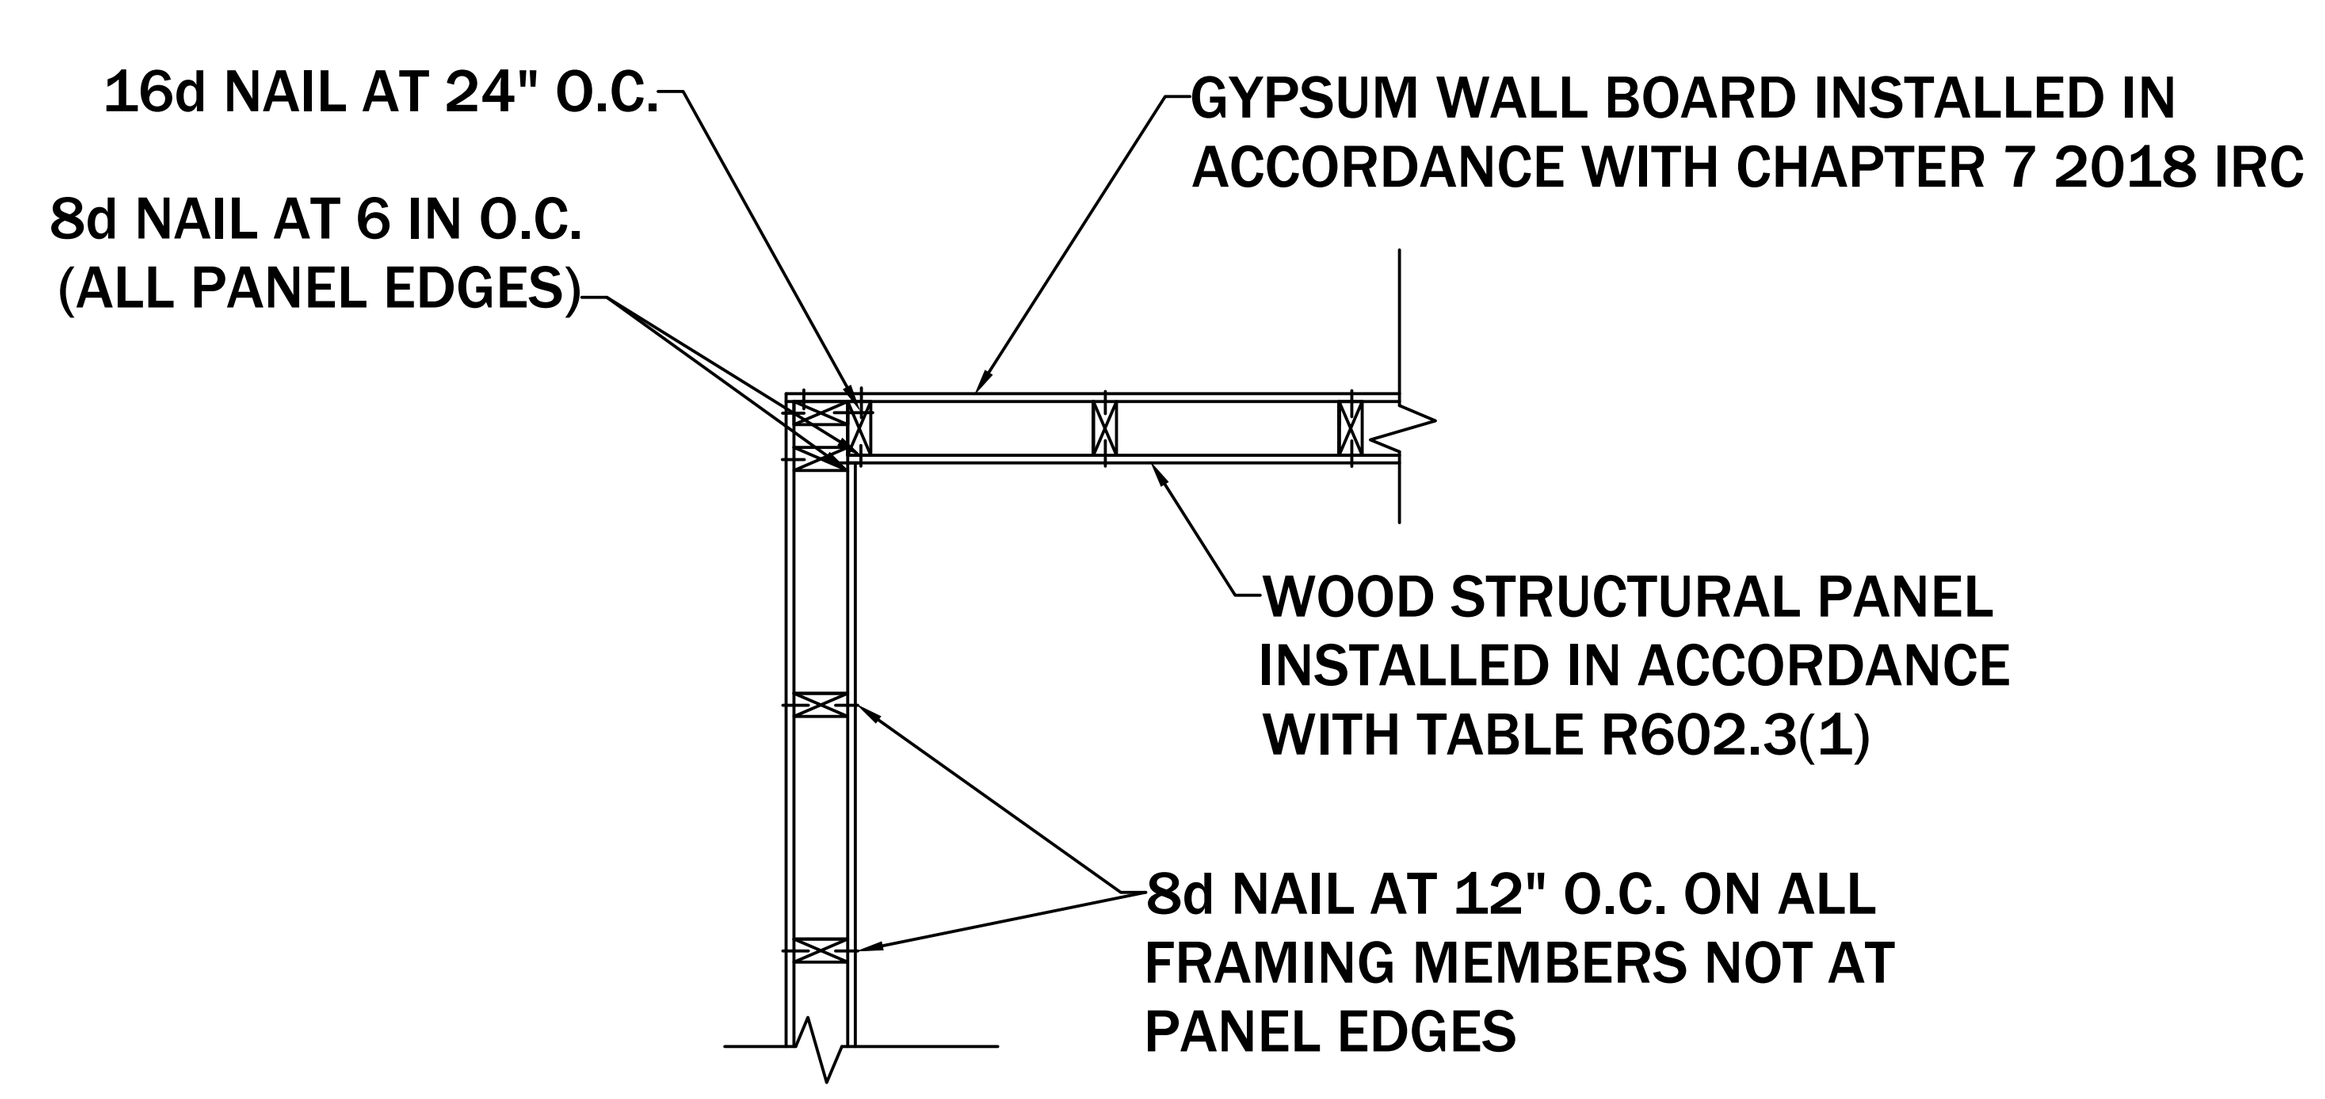


## 6 INSIDE CORNER DETAIL

SCALE: NTS

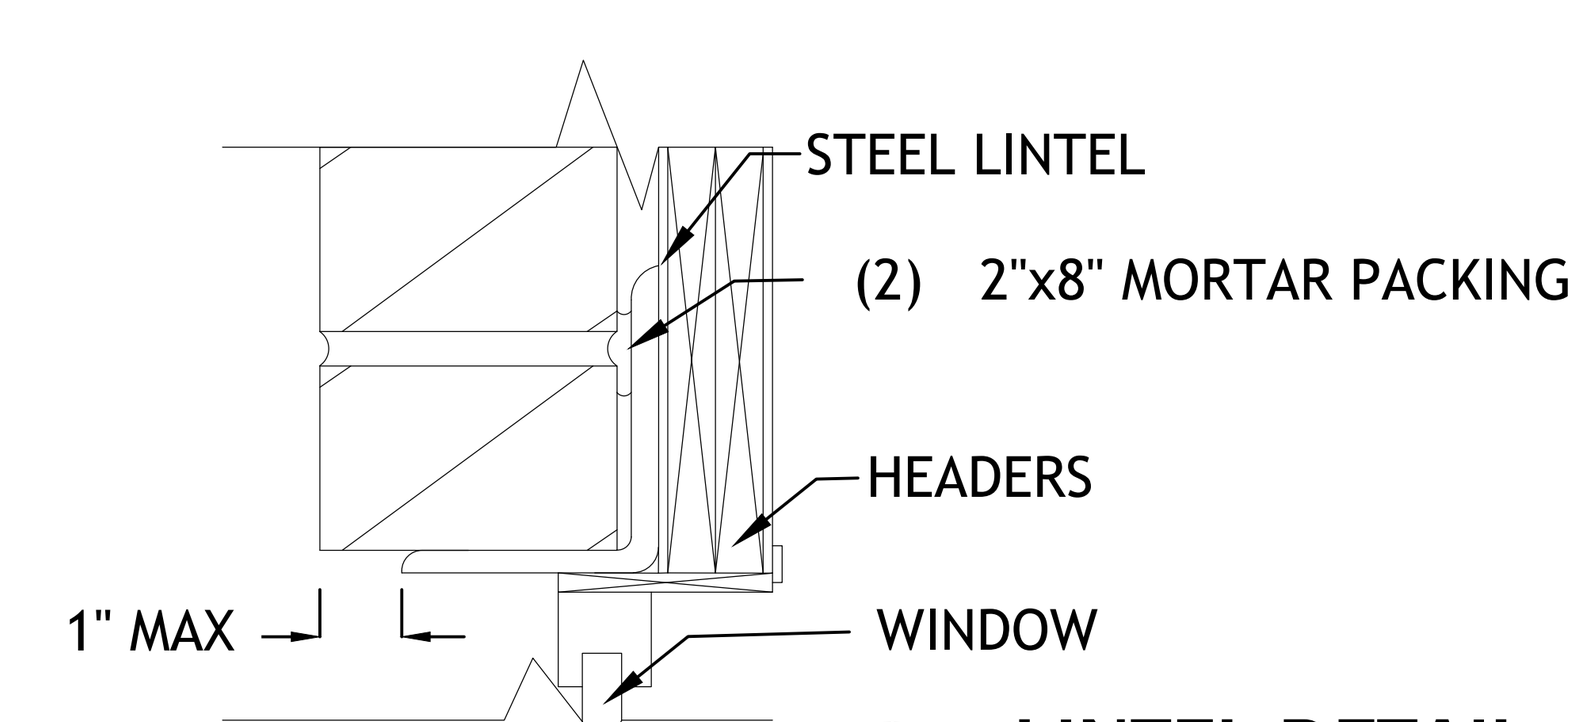


## 6 LINTEL DETAIL

SCALE: NTS

1

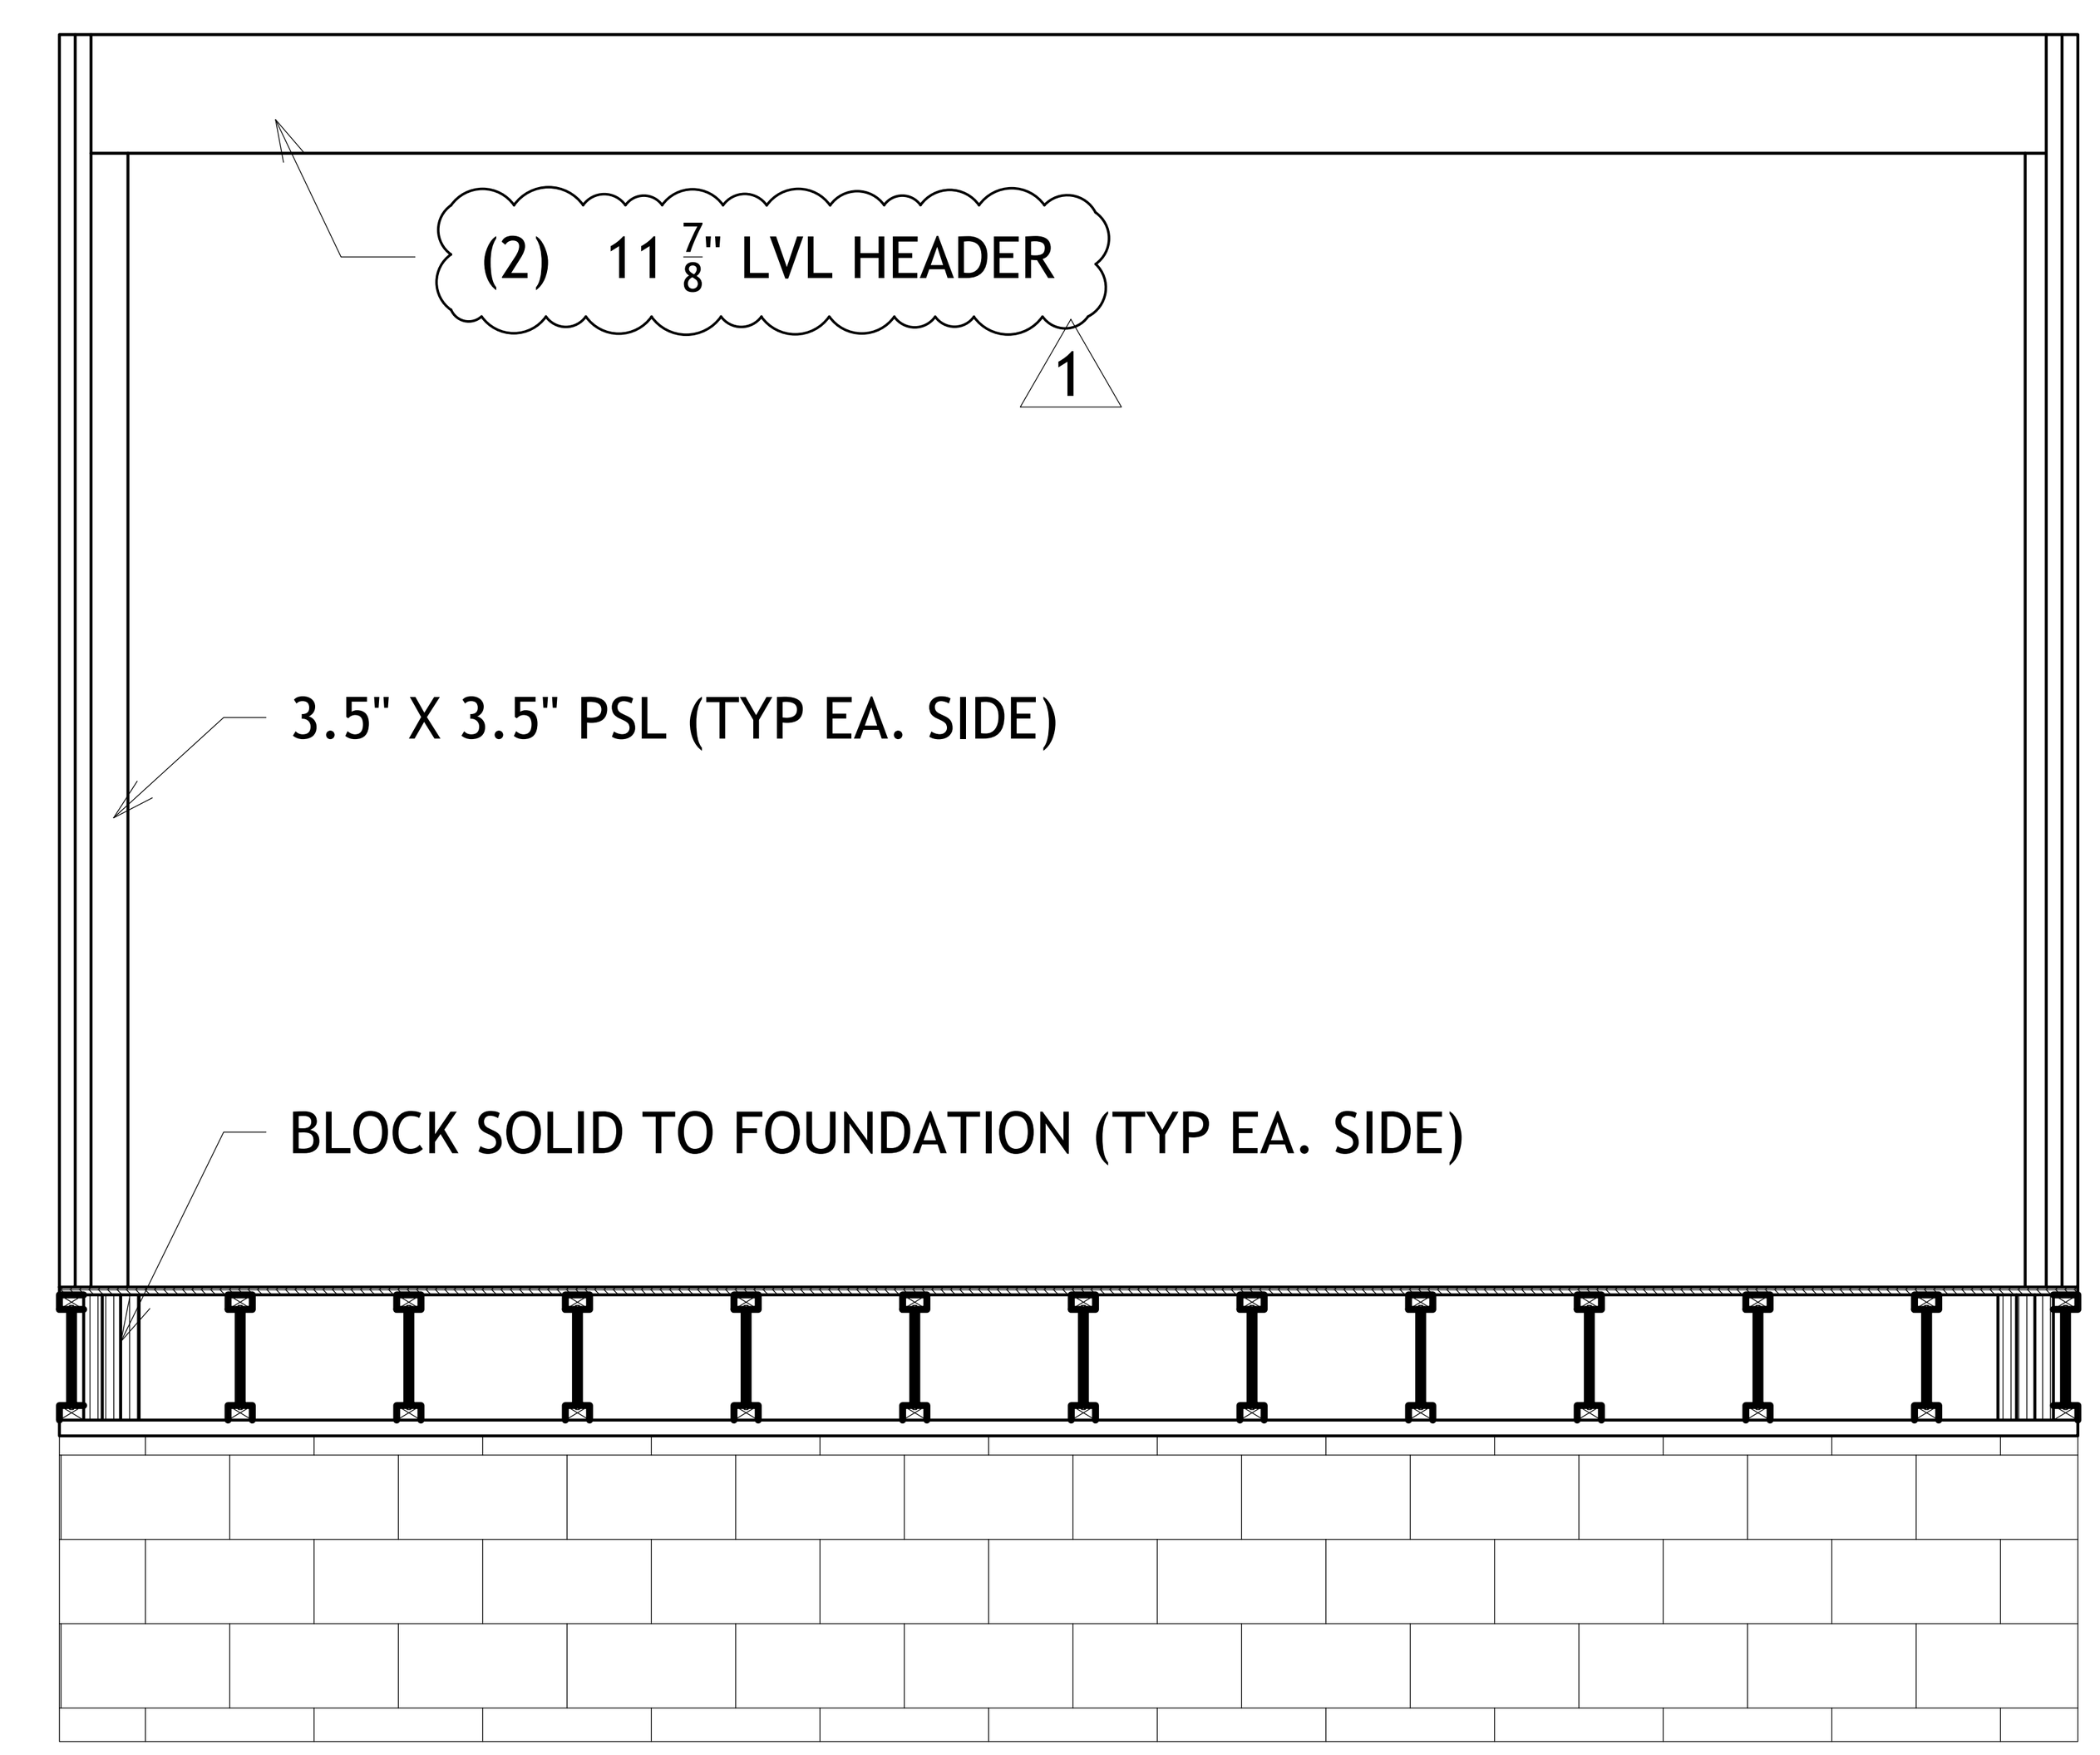


## 8 PATIO SLIDING DOOR SECTION

SCALE: 3/4"= 1'

16-32 DRAFTING, LLC
2430 WESTWOOD AVE, SUITE 202
RICHMOND, VA 23230

THE VASQUEZ, RESIDENCE

ELEVATIONS
5019 JESSUP RD, RICHMOND, VA 23234

DRAWN BY:

GAH

| # | REV.DATE |
|---|---|
| 1 | 05/25/2025 |

A2

## WOOD FRAMING

A. STRUCTURAL FRAMING ANDBLOCKING SHALL BE NO. 2 OR BETTER SOUTHERN YELLOW PINE (19% MAX MOISTURE CONTENT, f = 1200, E = 1,600,000), UNLESS NOTED OTHERWISE.
B. STUDS SHALL BE GRADE-MARKED "STANDARD" OR BETTER.
C. ALL FRAMING WHICH CONTACTS THE GROUND, MASONRY, OR CONCRETE SHALL BE PRESERVATIVE PRESSURE TREATED.
D. LAMINATED VENEER LUMBER (LVL'S) SHALL BE TRUSJOIST'S 1.9E MICROLAM OR APPROVED EQUAL.
E. LAMINATED STRAND LUMBER (LSL'S) SHALL BE TRUSJOIST'S 1.3E OR 1.5E TIMBERSTRAND OR APPROVED EQUAL.
F. PARALLEL STRAND LUMBER (PSL'S) SHALL BE TRUSJOIST'S 2.0E PARALLAM OR APPROVED EQUAL.
G. PRE-FAB. WOOD I-JOISTS SHALL BE TRUSJOIST'S TJI JOISTS OR APPROVED EQUAL.
H. CONTRACTOR TO PROVIDE FRAME BLOCKING AND BRIDGING AS REQUIRED.
I. JOIST AND BEAM DESIGN MAX. ALLOWABLE DEFLECTIONS SHALL BE AS FOLLOWED:
   1. JOISTS = L/480 (LL)
   2. BEAMS = L/360 (LL)
J. FRAMING ACCESSORIES SHALL BE SIMPSON STRONG-TIE OR APPROVED EQUAL.
K. SUBFLOORING SHALL BE APA RATED 3/4" STURD-I-FLOOR, T&G EXTERIOR EXPOSURE UNLESS NOTED OTHERWISE.
L. SUBFLOORING SHALL BE ADHESIVE APPLIED AND NAILED IN PLACE PER MANUFACTURER'S RECOMMENDATIONS.
M. SUBFLOOR/UNDERLAYMENT UNDER THINSET TIE SHALL BE A MIN. OF 1 1/4" TOTAL THICKNESS PER TCA RECOMMENDATIONS.
N. ROOF SHEATHING SHALL BE APA SPAN-RATED 7/16" CDX UNLESS OTHERWISE NOTED.
O. WALL SHEATHING SHALL BE APA SPAN-RATED 7/16" OSB UNLESS OTHERWISE NOTED.
P. DOUBLE STUDS AT ALL DOOR, WINDOWS, AND CASED OPENING JAMBS.
Q. FRAMER TO VERIFY DIMENSIONAL LAYOUT WITH CONSTRUCTION MANAGER PRIOR TO SETTING WALLS.

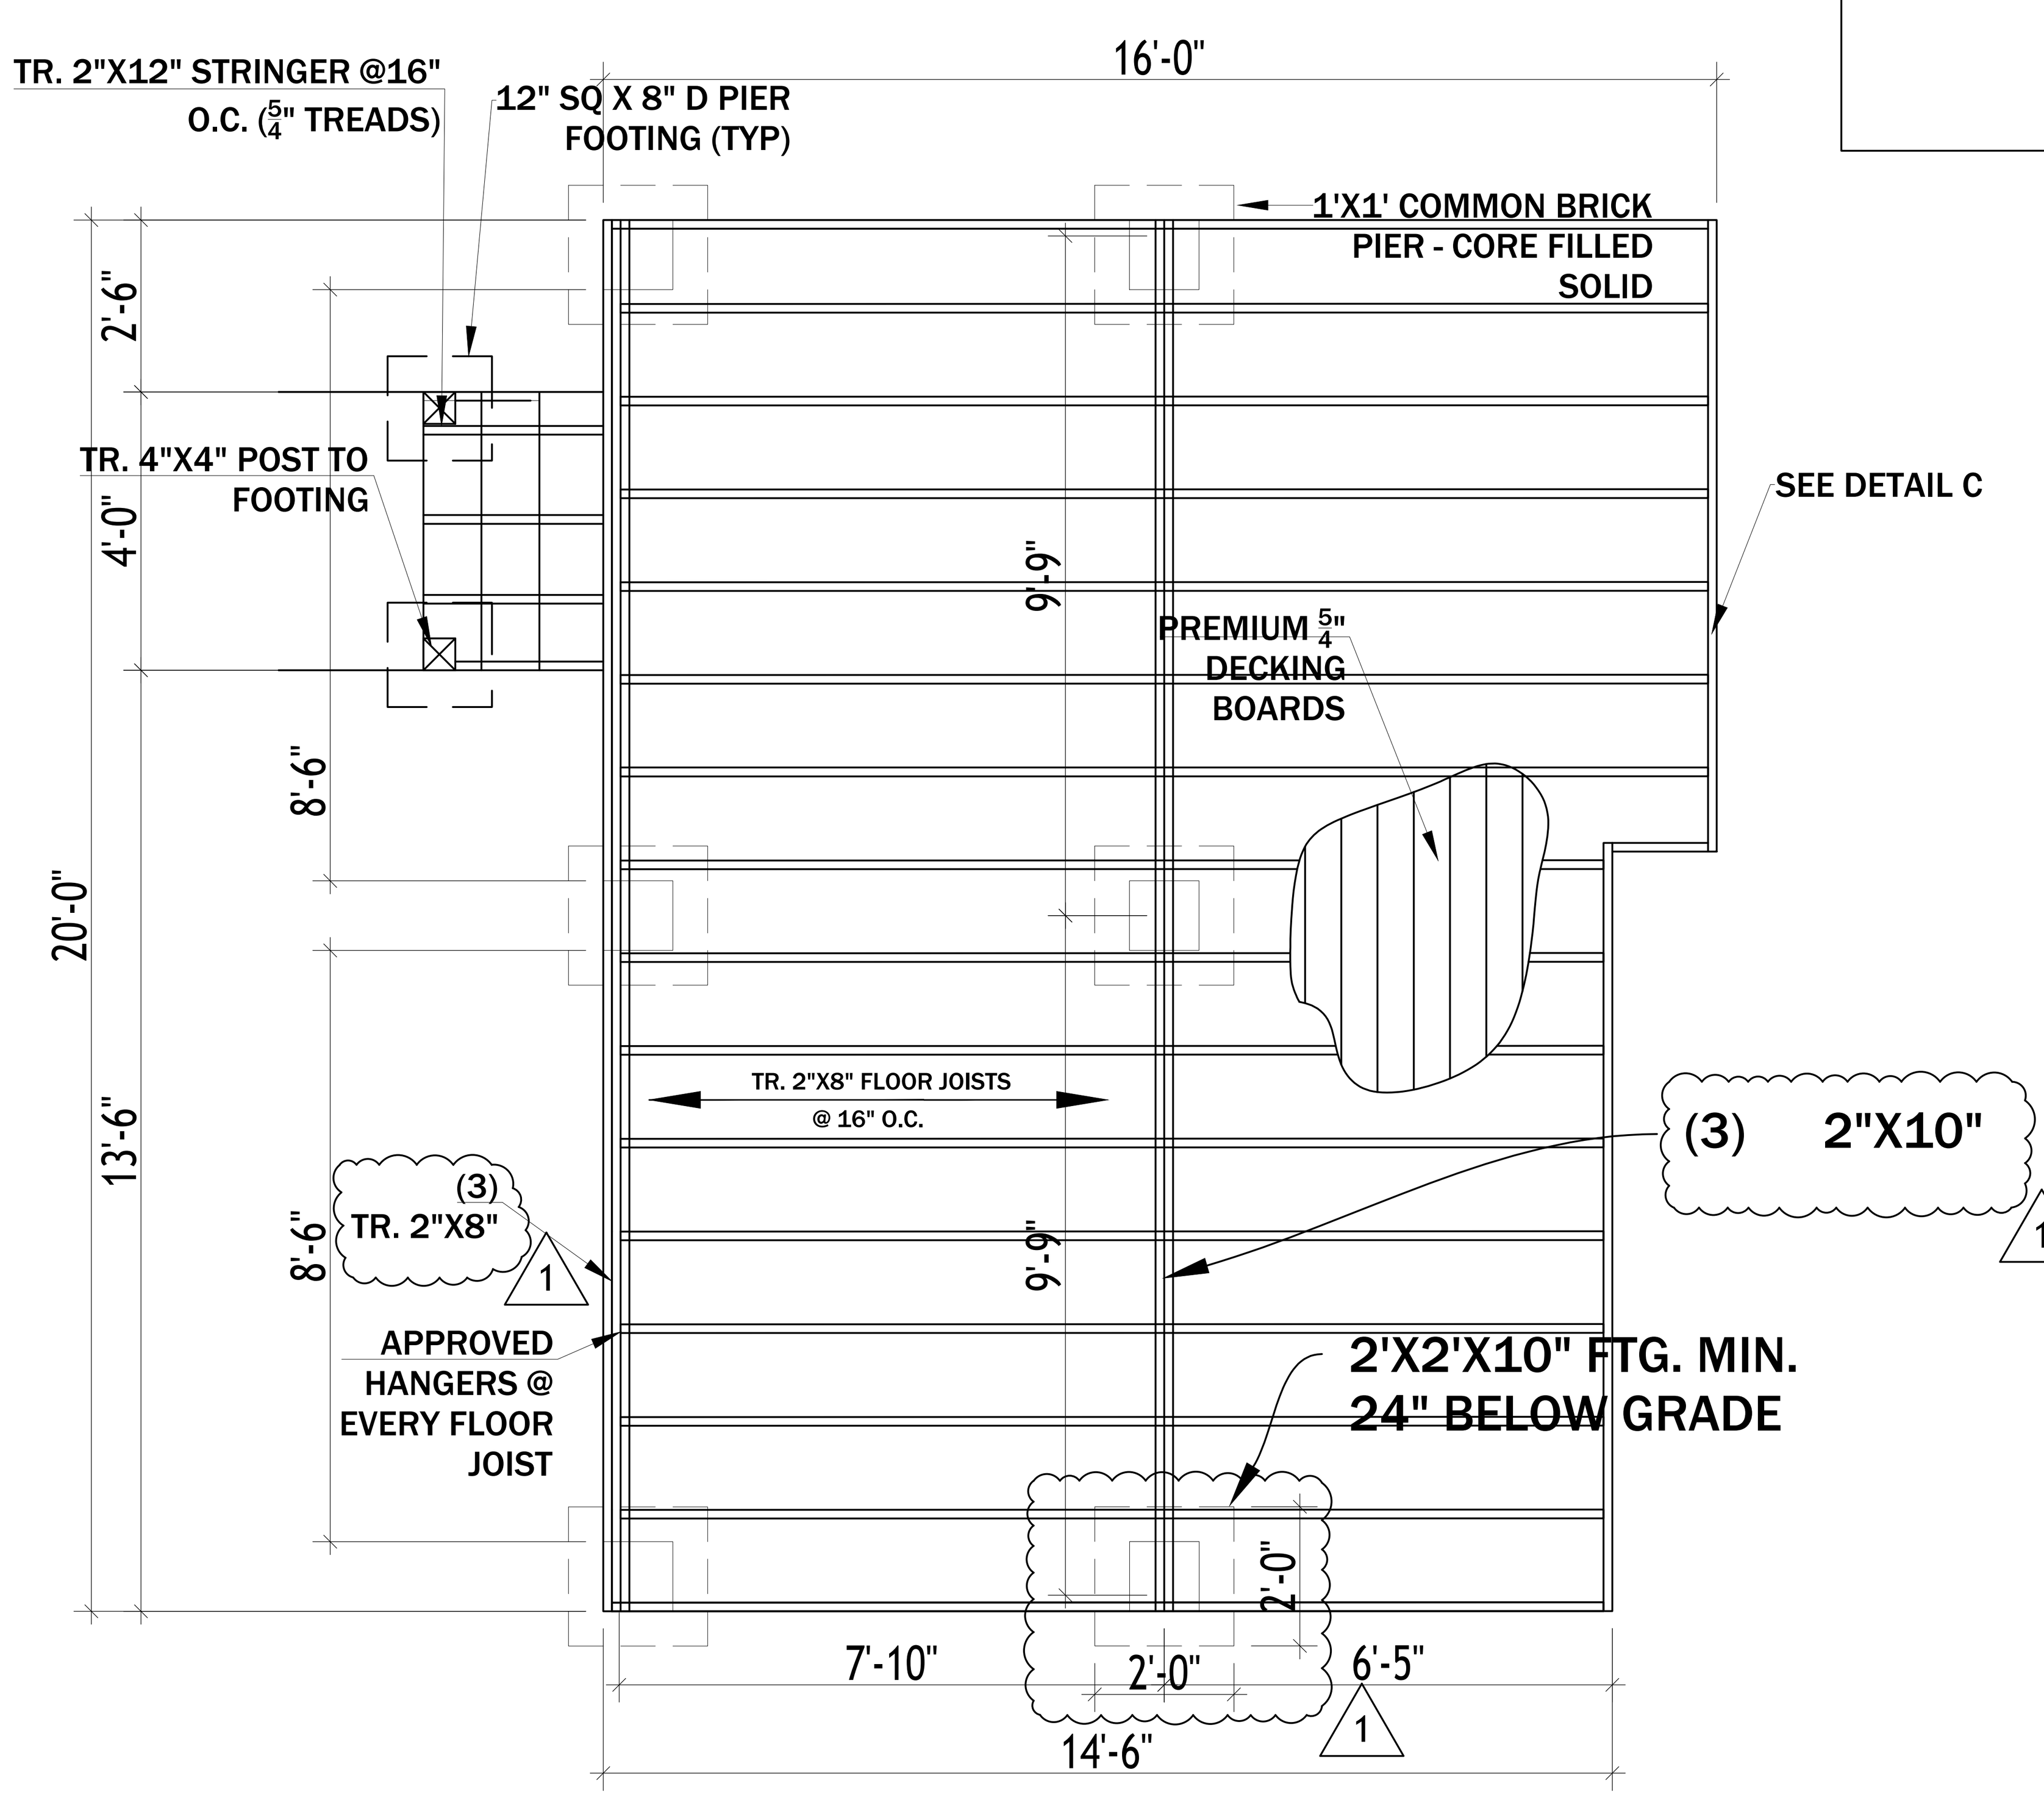


8 DECK PLAN

SCALE: 3/8"= 1'

ALL INTERIOR MEASUREMENTS ARE FROM FRAMING MEMBER TO FRAMING MEMBER

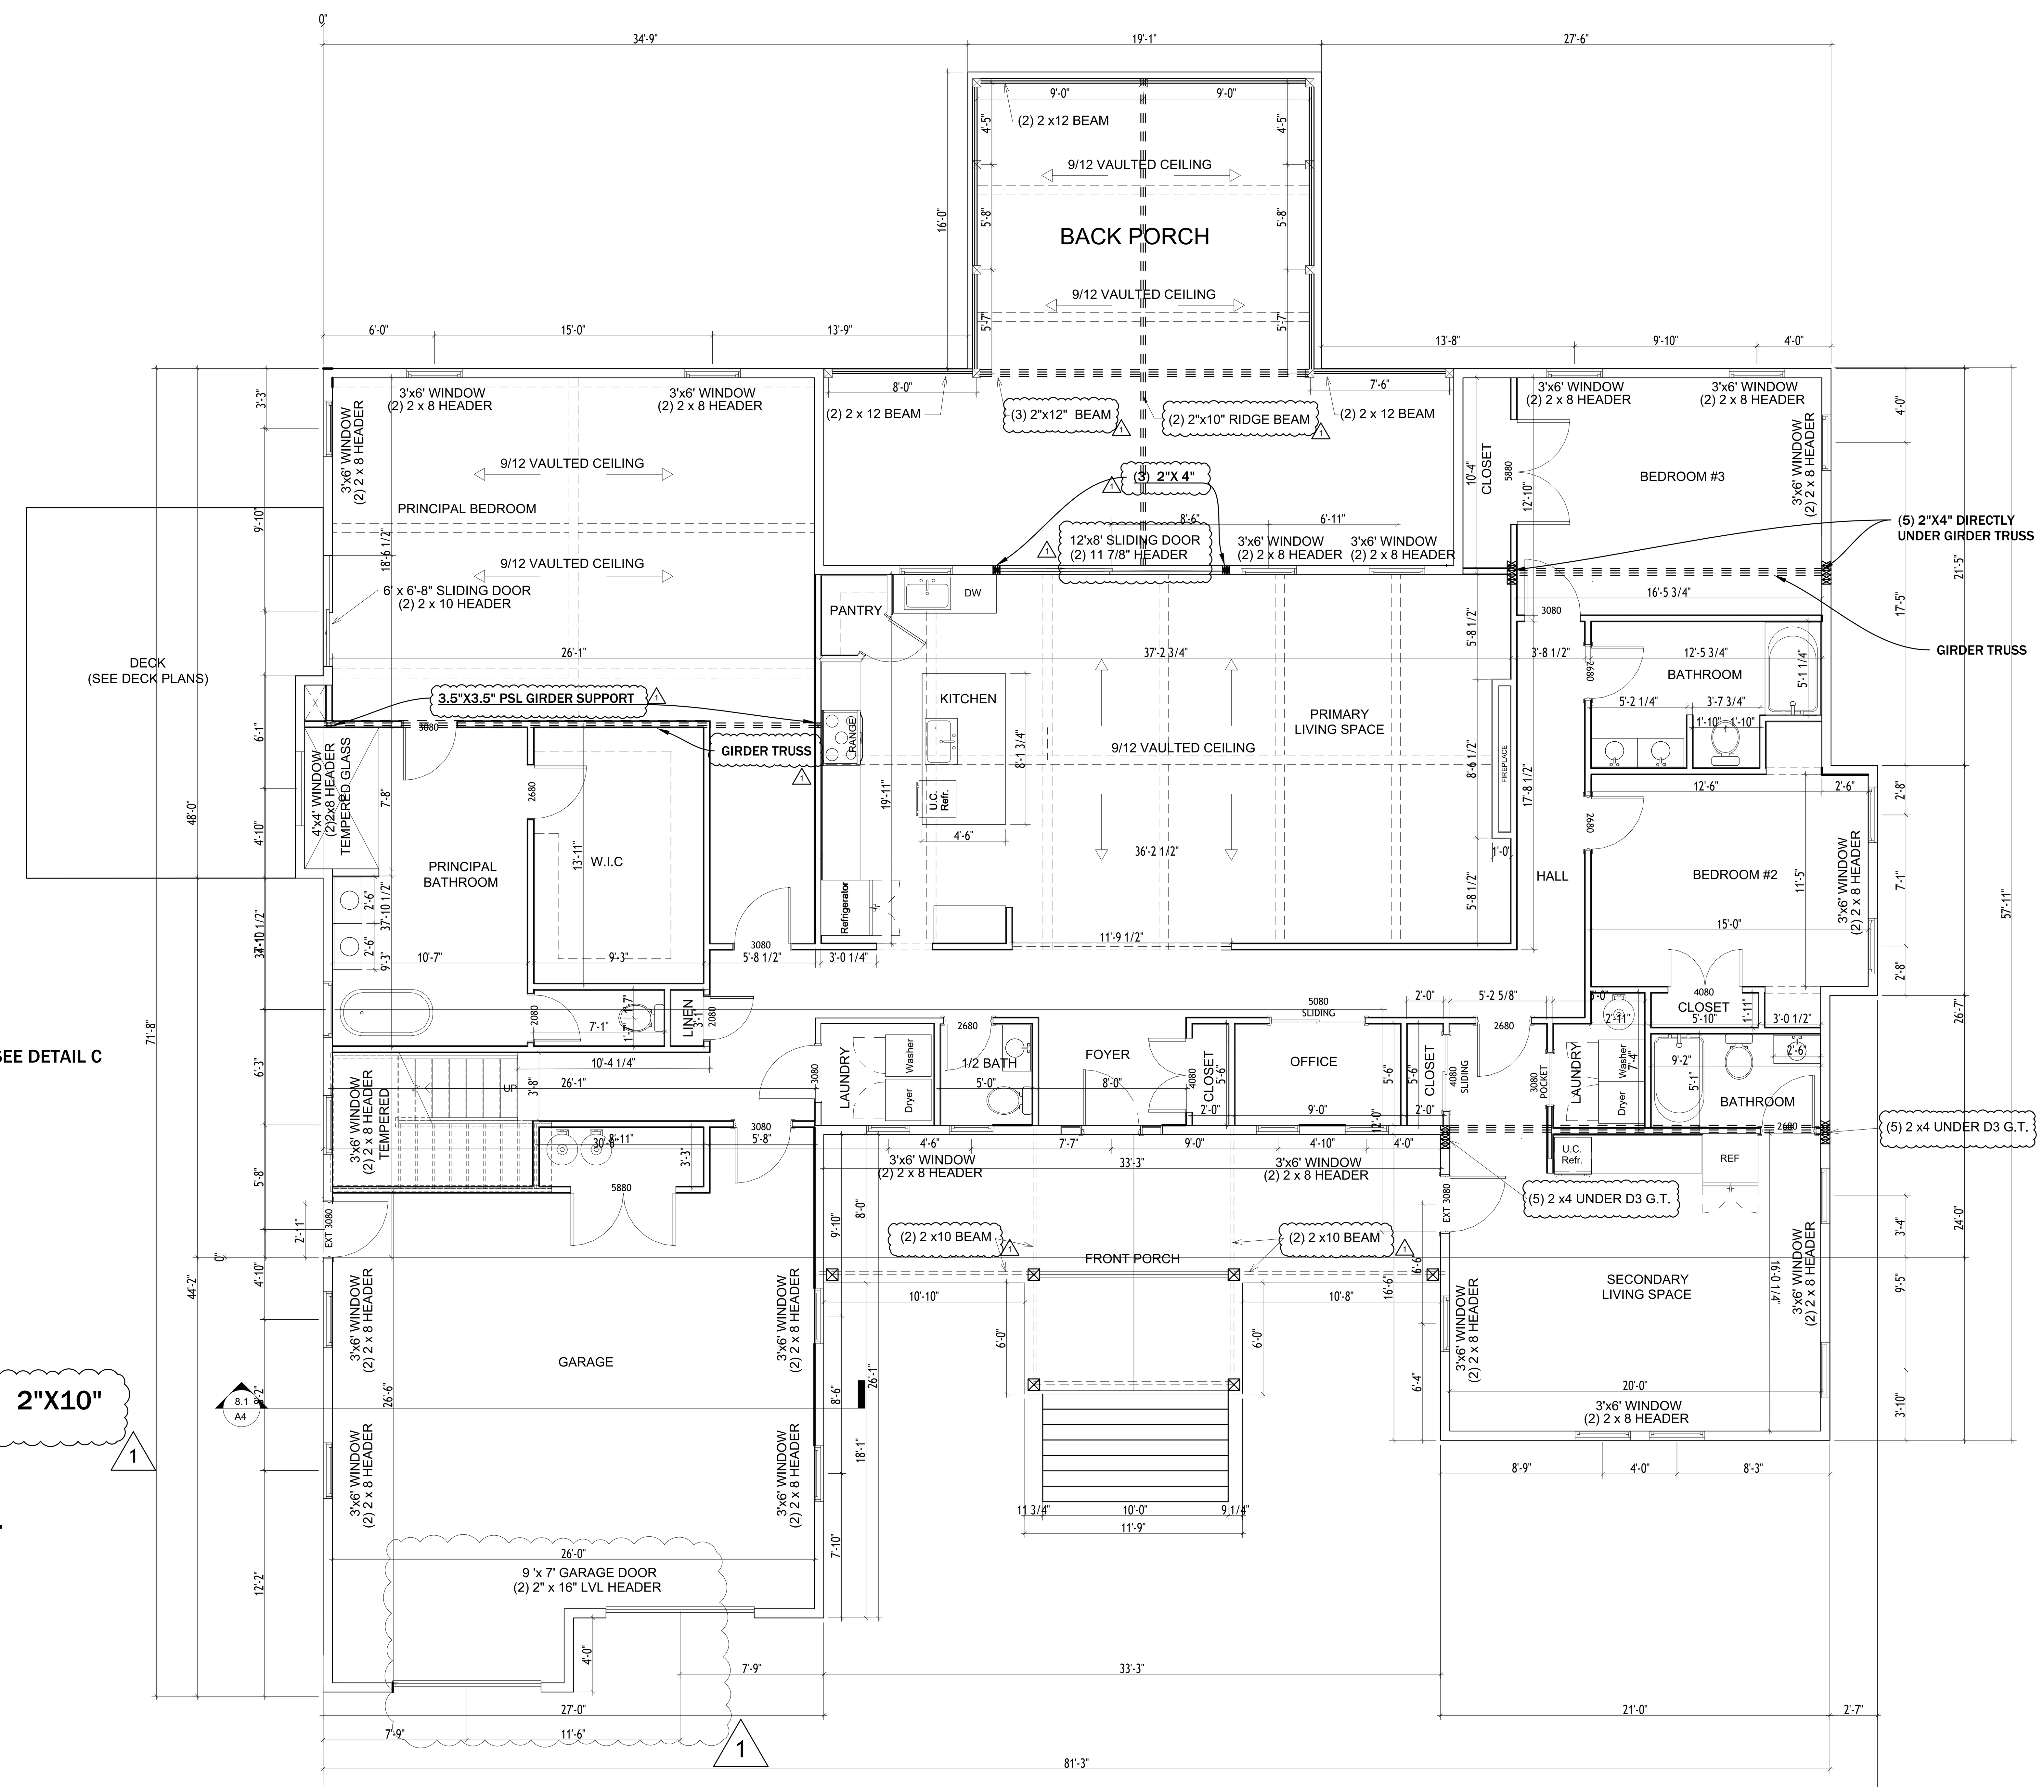


1ST LEVEL FLOOR PLAN

SCALE: 1/4"= 1'

16-32 DRAFTING, LLC
2430 WESTWOOD AVE, SUITE 202
RICHMOND, VA 23230

THE VASQUEZ, RESIDENCE

1ST LEVEL FLOOR PLAN
5019 JESSUP RD, RICHMOND, VA 23234

| DRAWN BY: | |
|---|---|
| GAH | |
| # | REV.DATE |
| 1 | 05/25/2025 |

A3

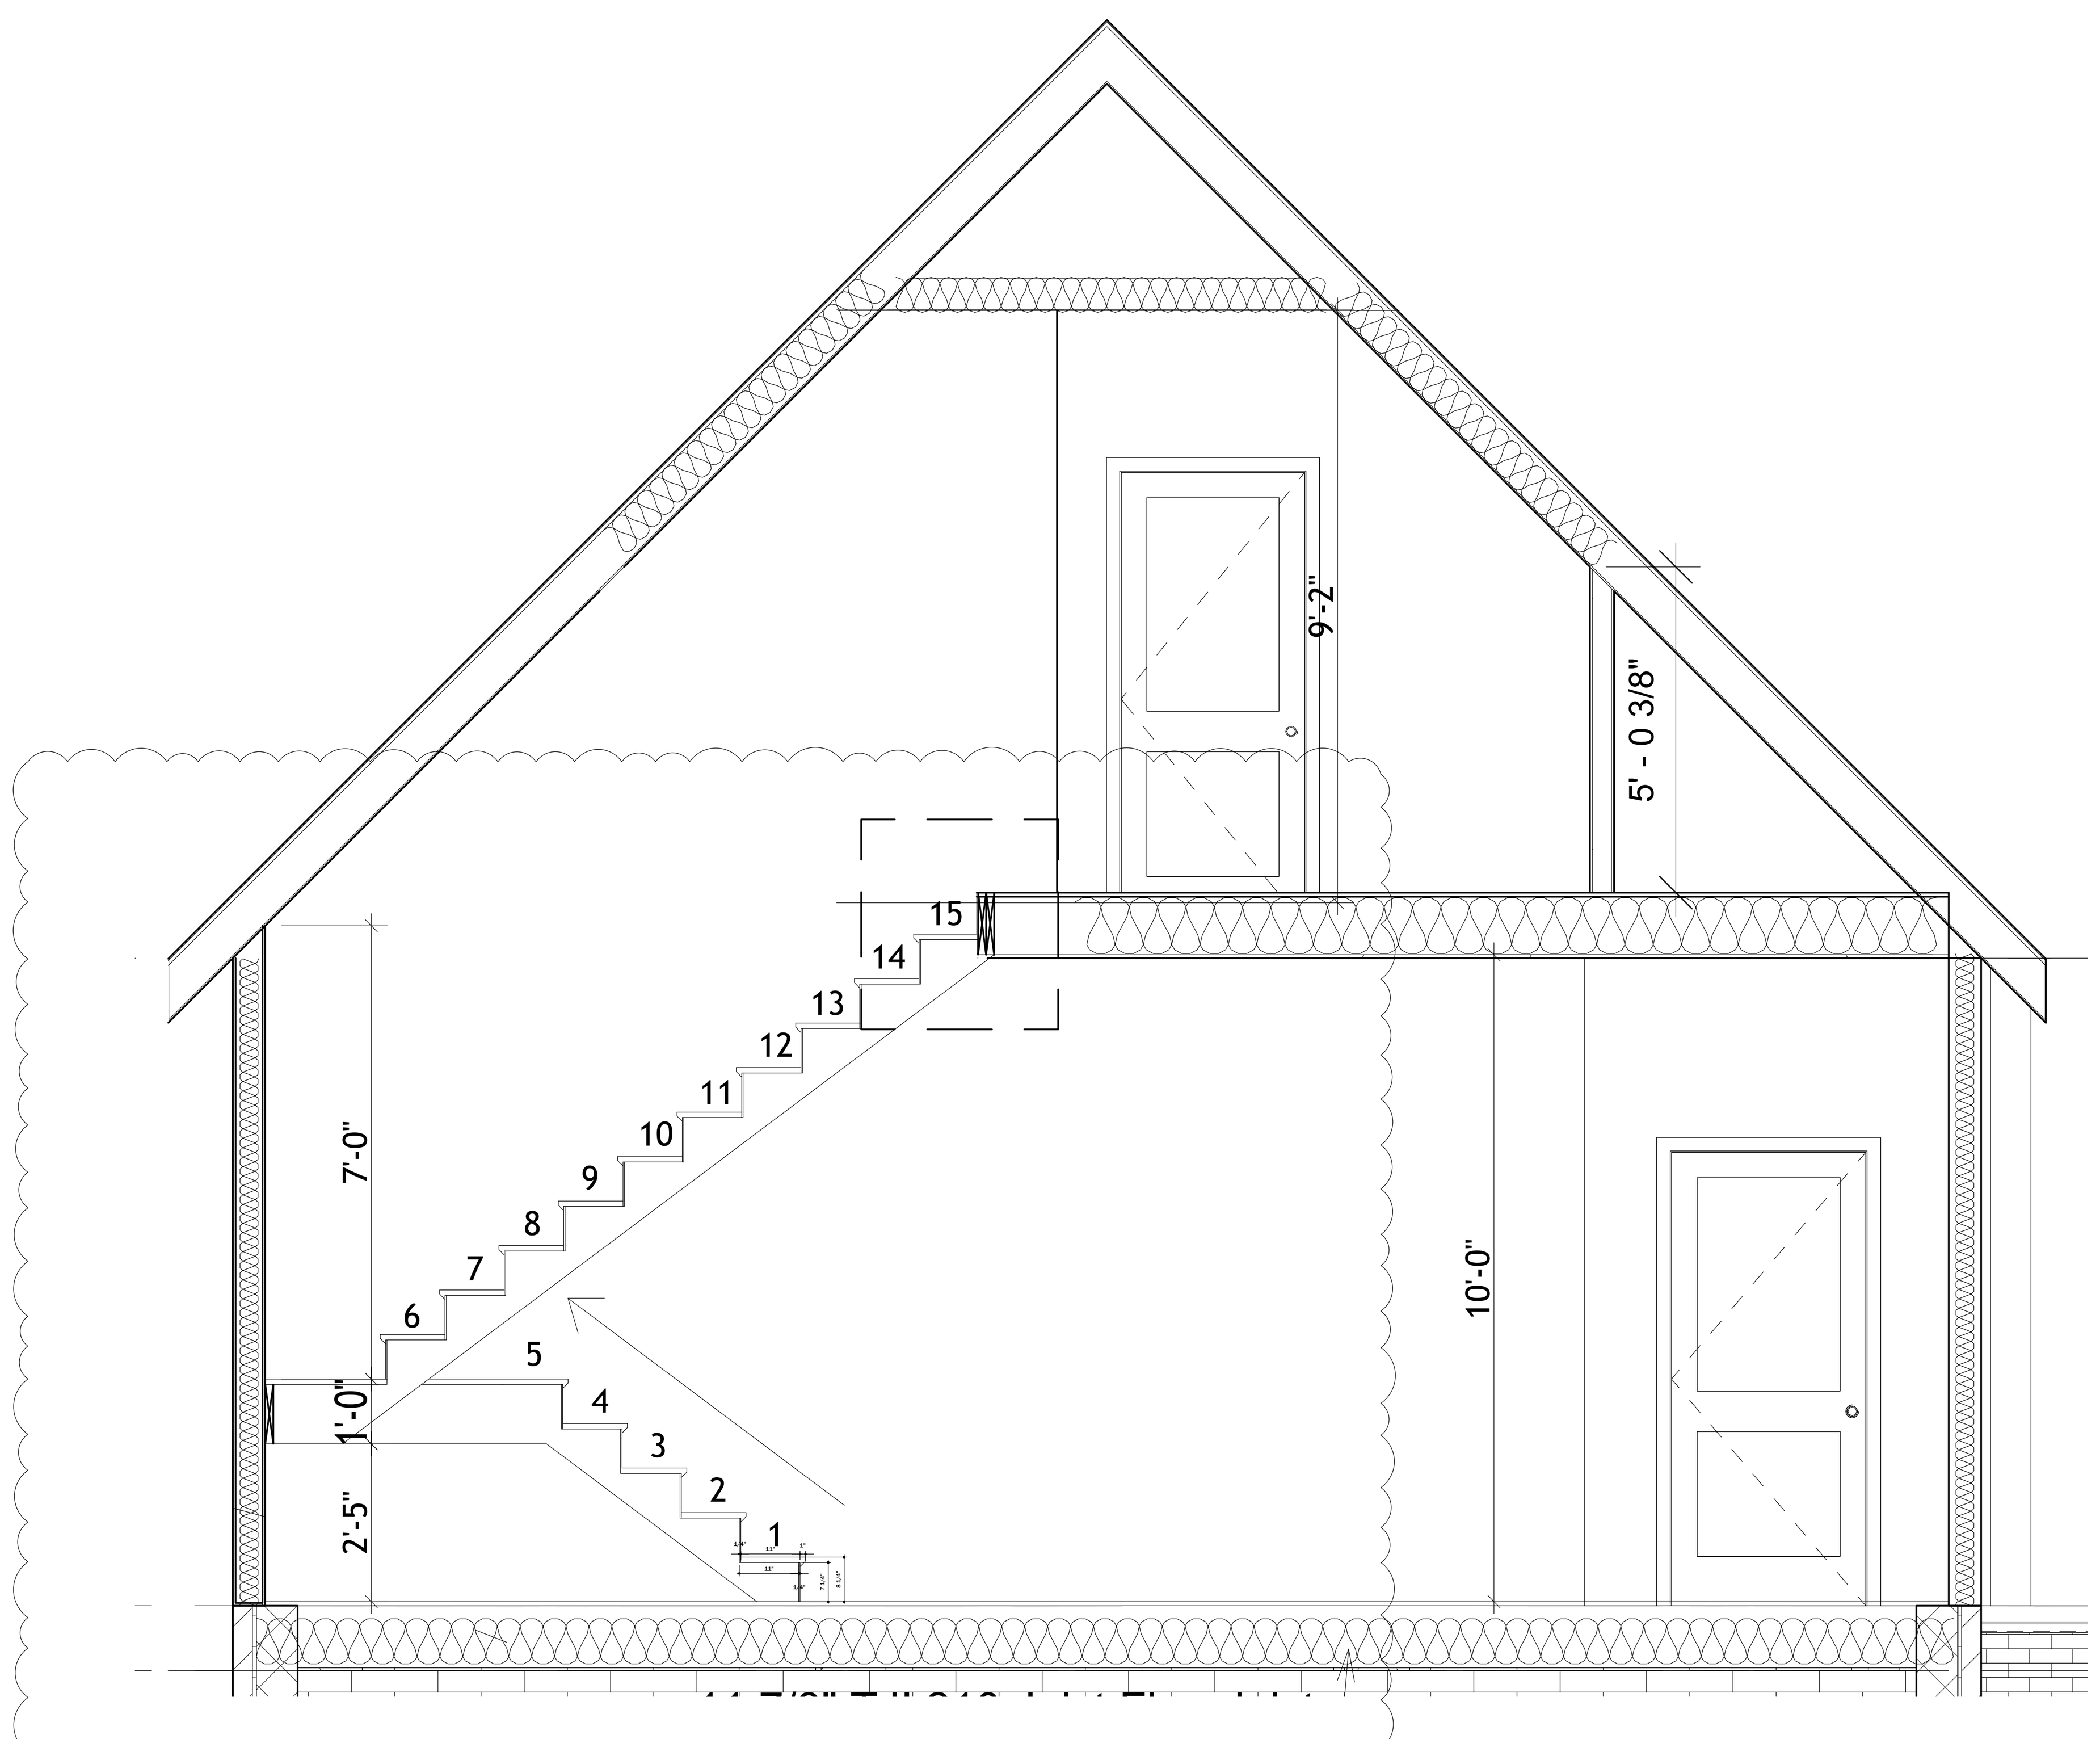


9 SECTION 1

SCALE: 3"= 1'

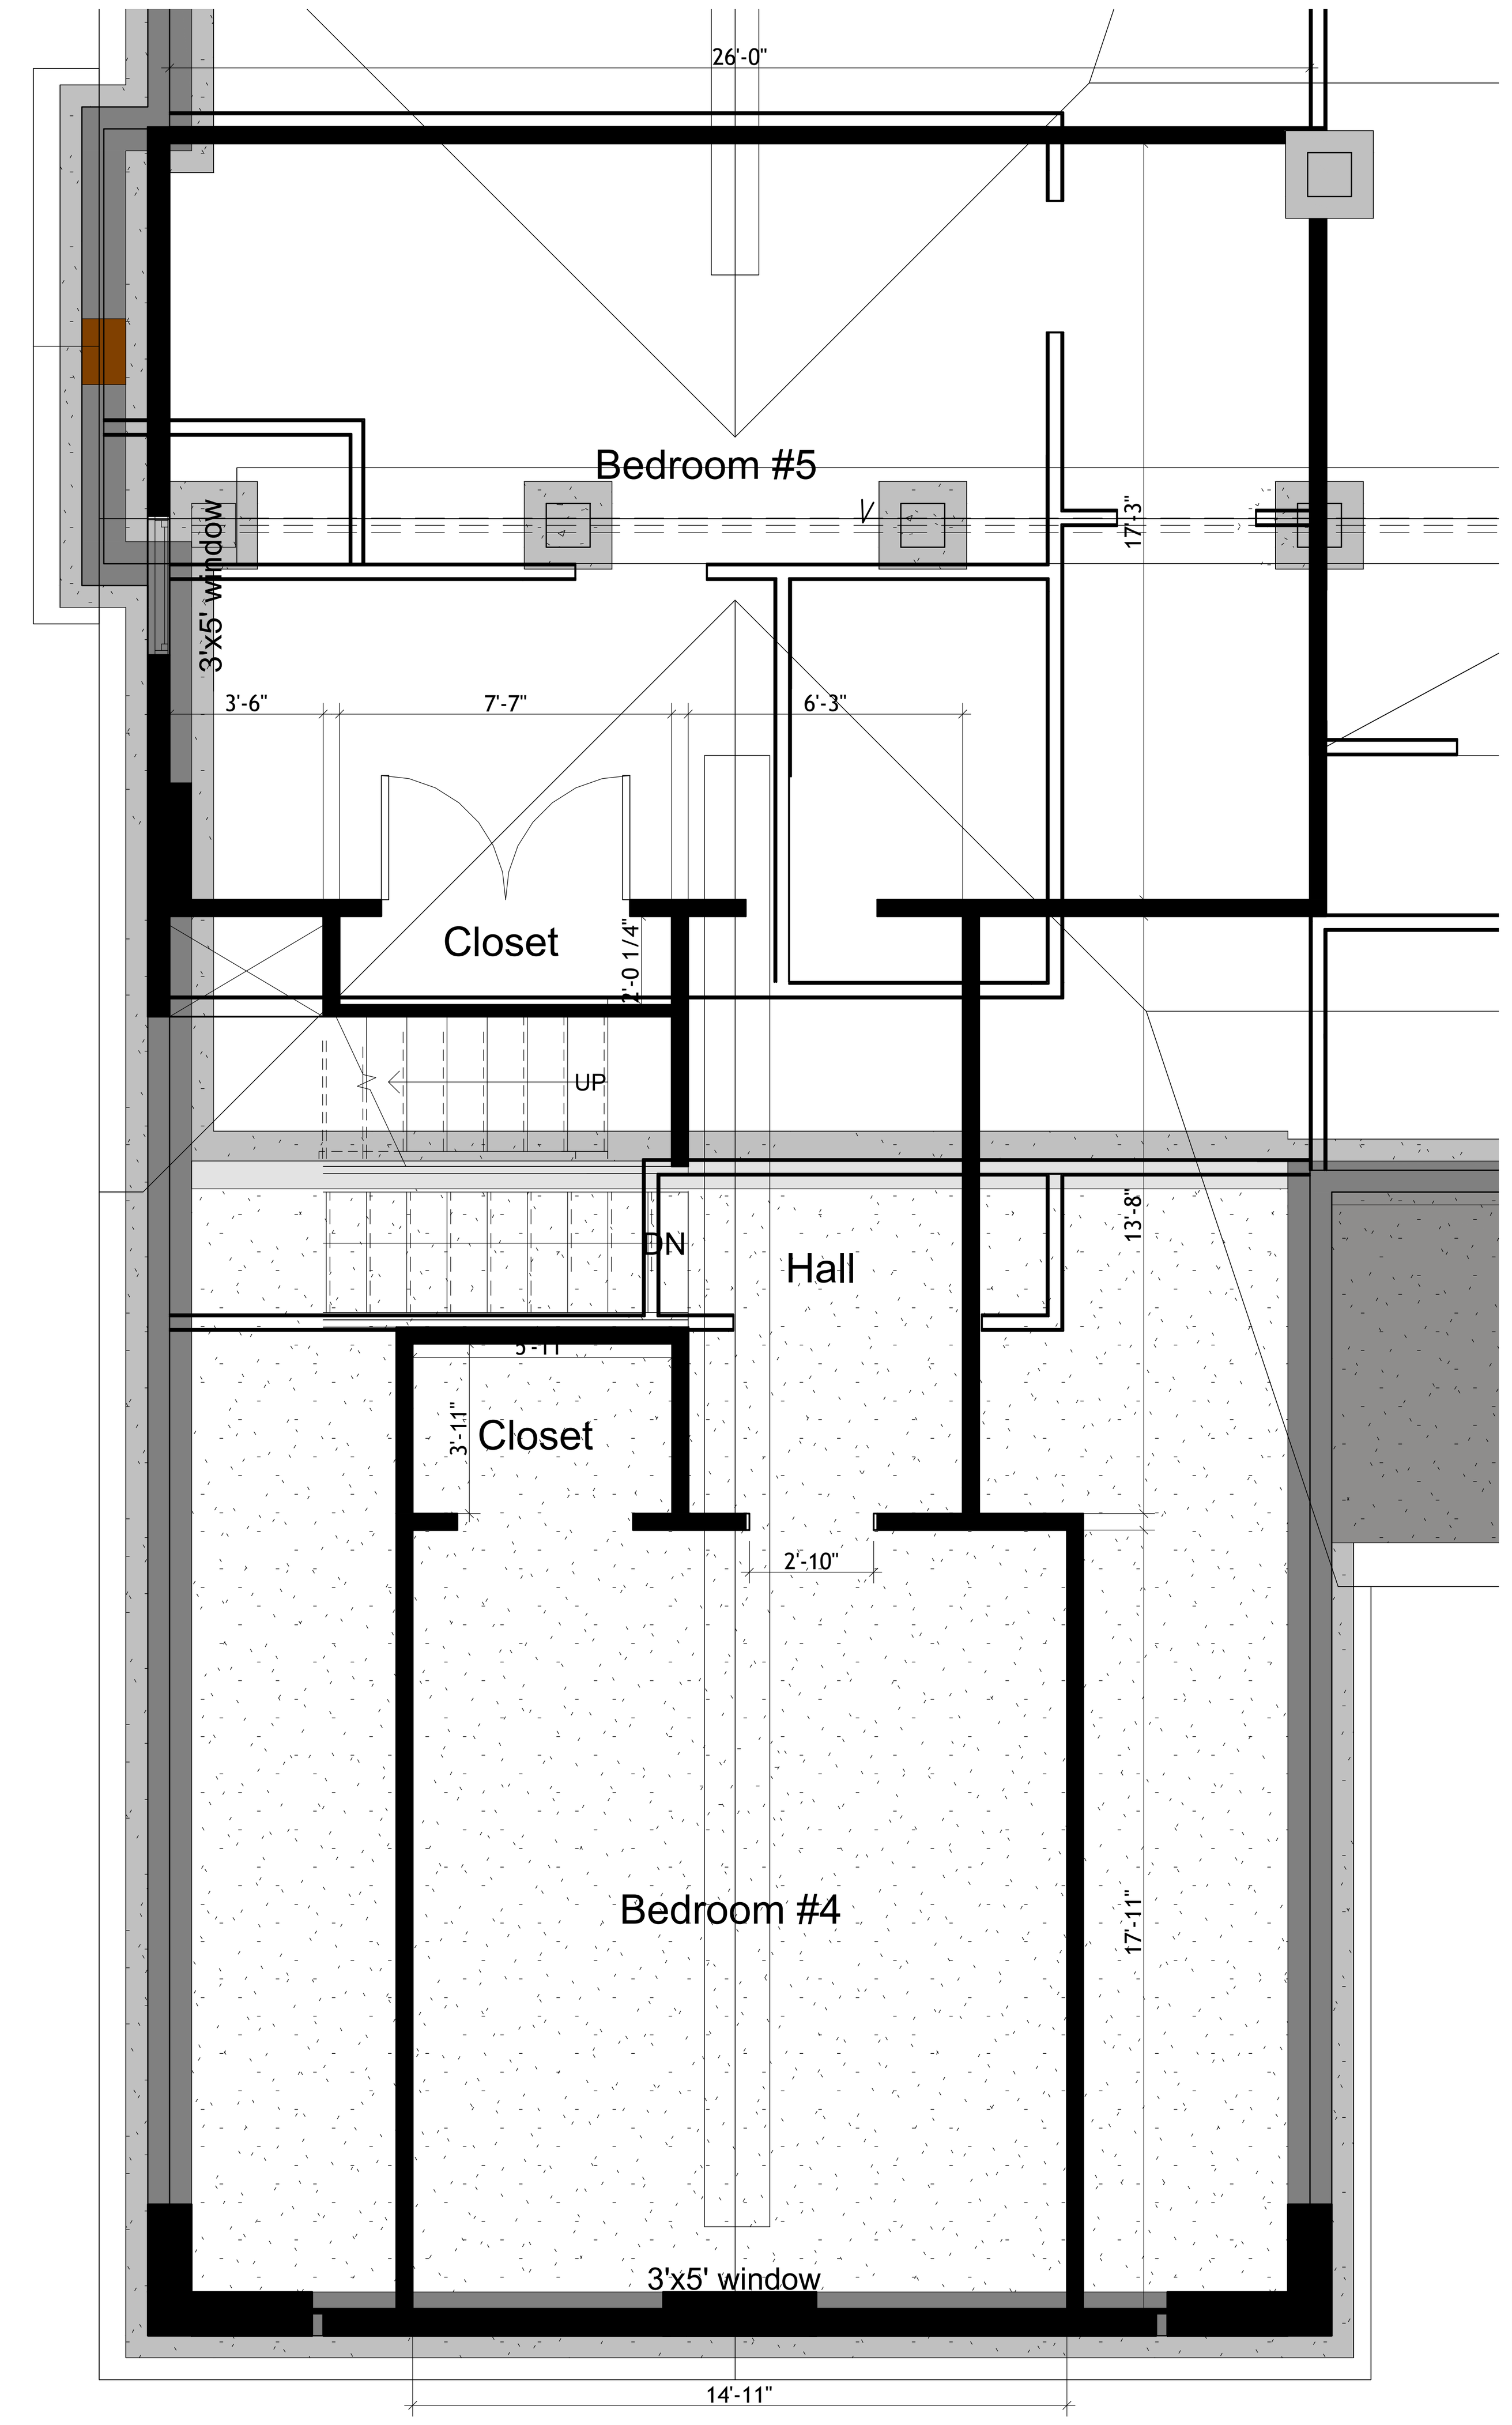


9.1 2ND LEVEL FLOOR PLAN

SCALE: 1/4"= 1'

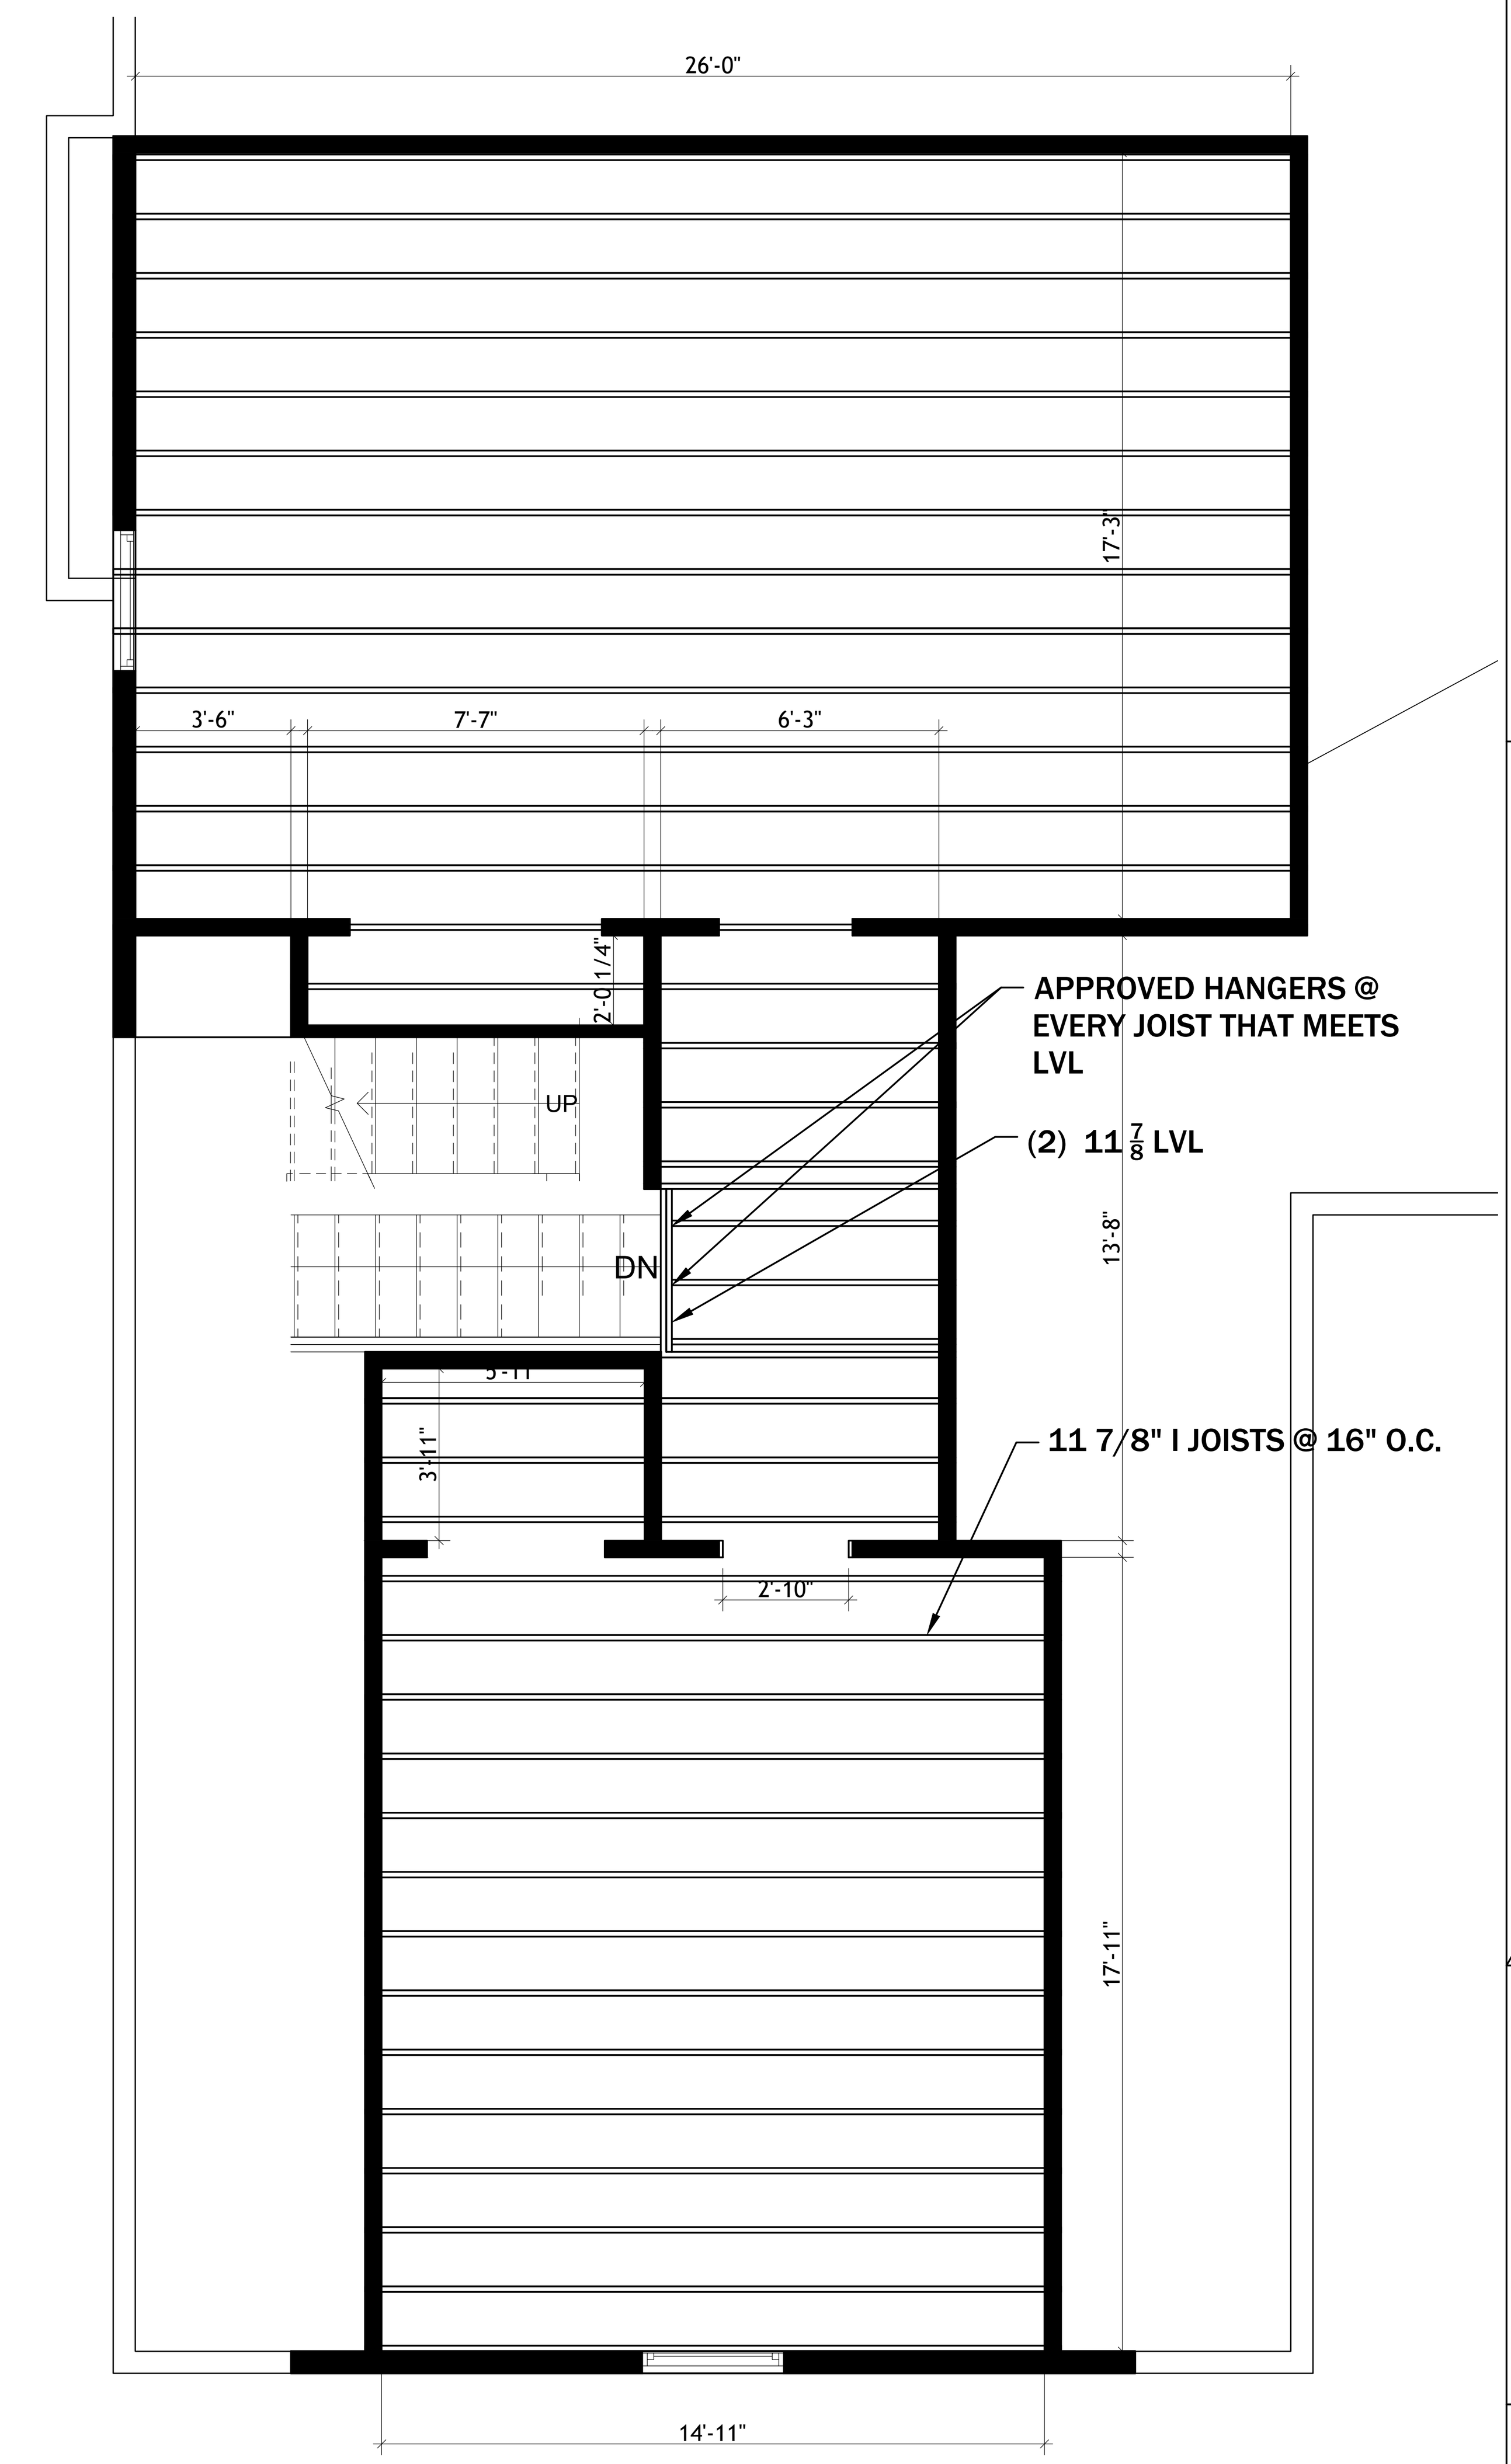


9.2 2ND LEVEL FLOOR FRAMING PLAN

SCALE: 1/4"= 1'

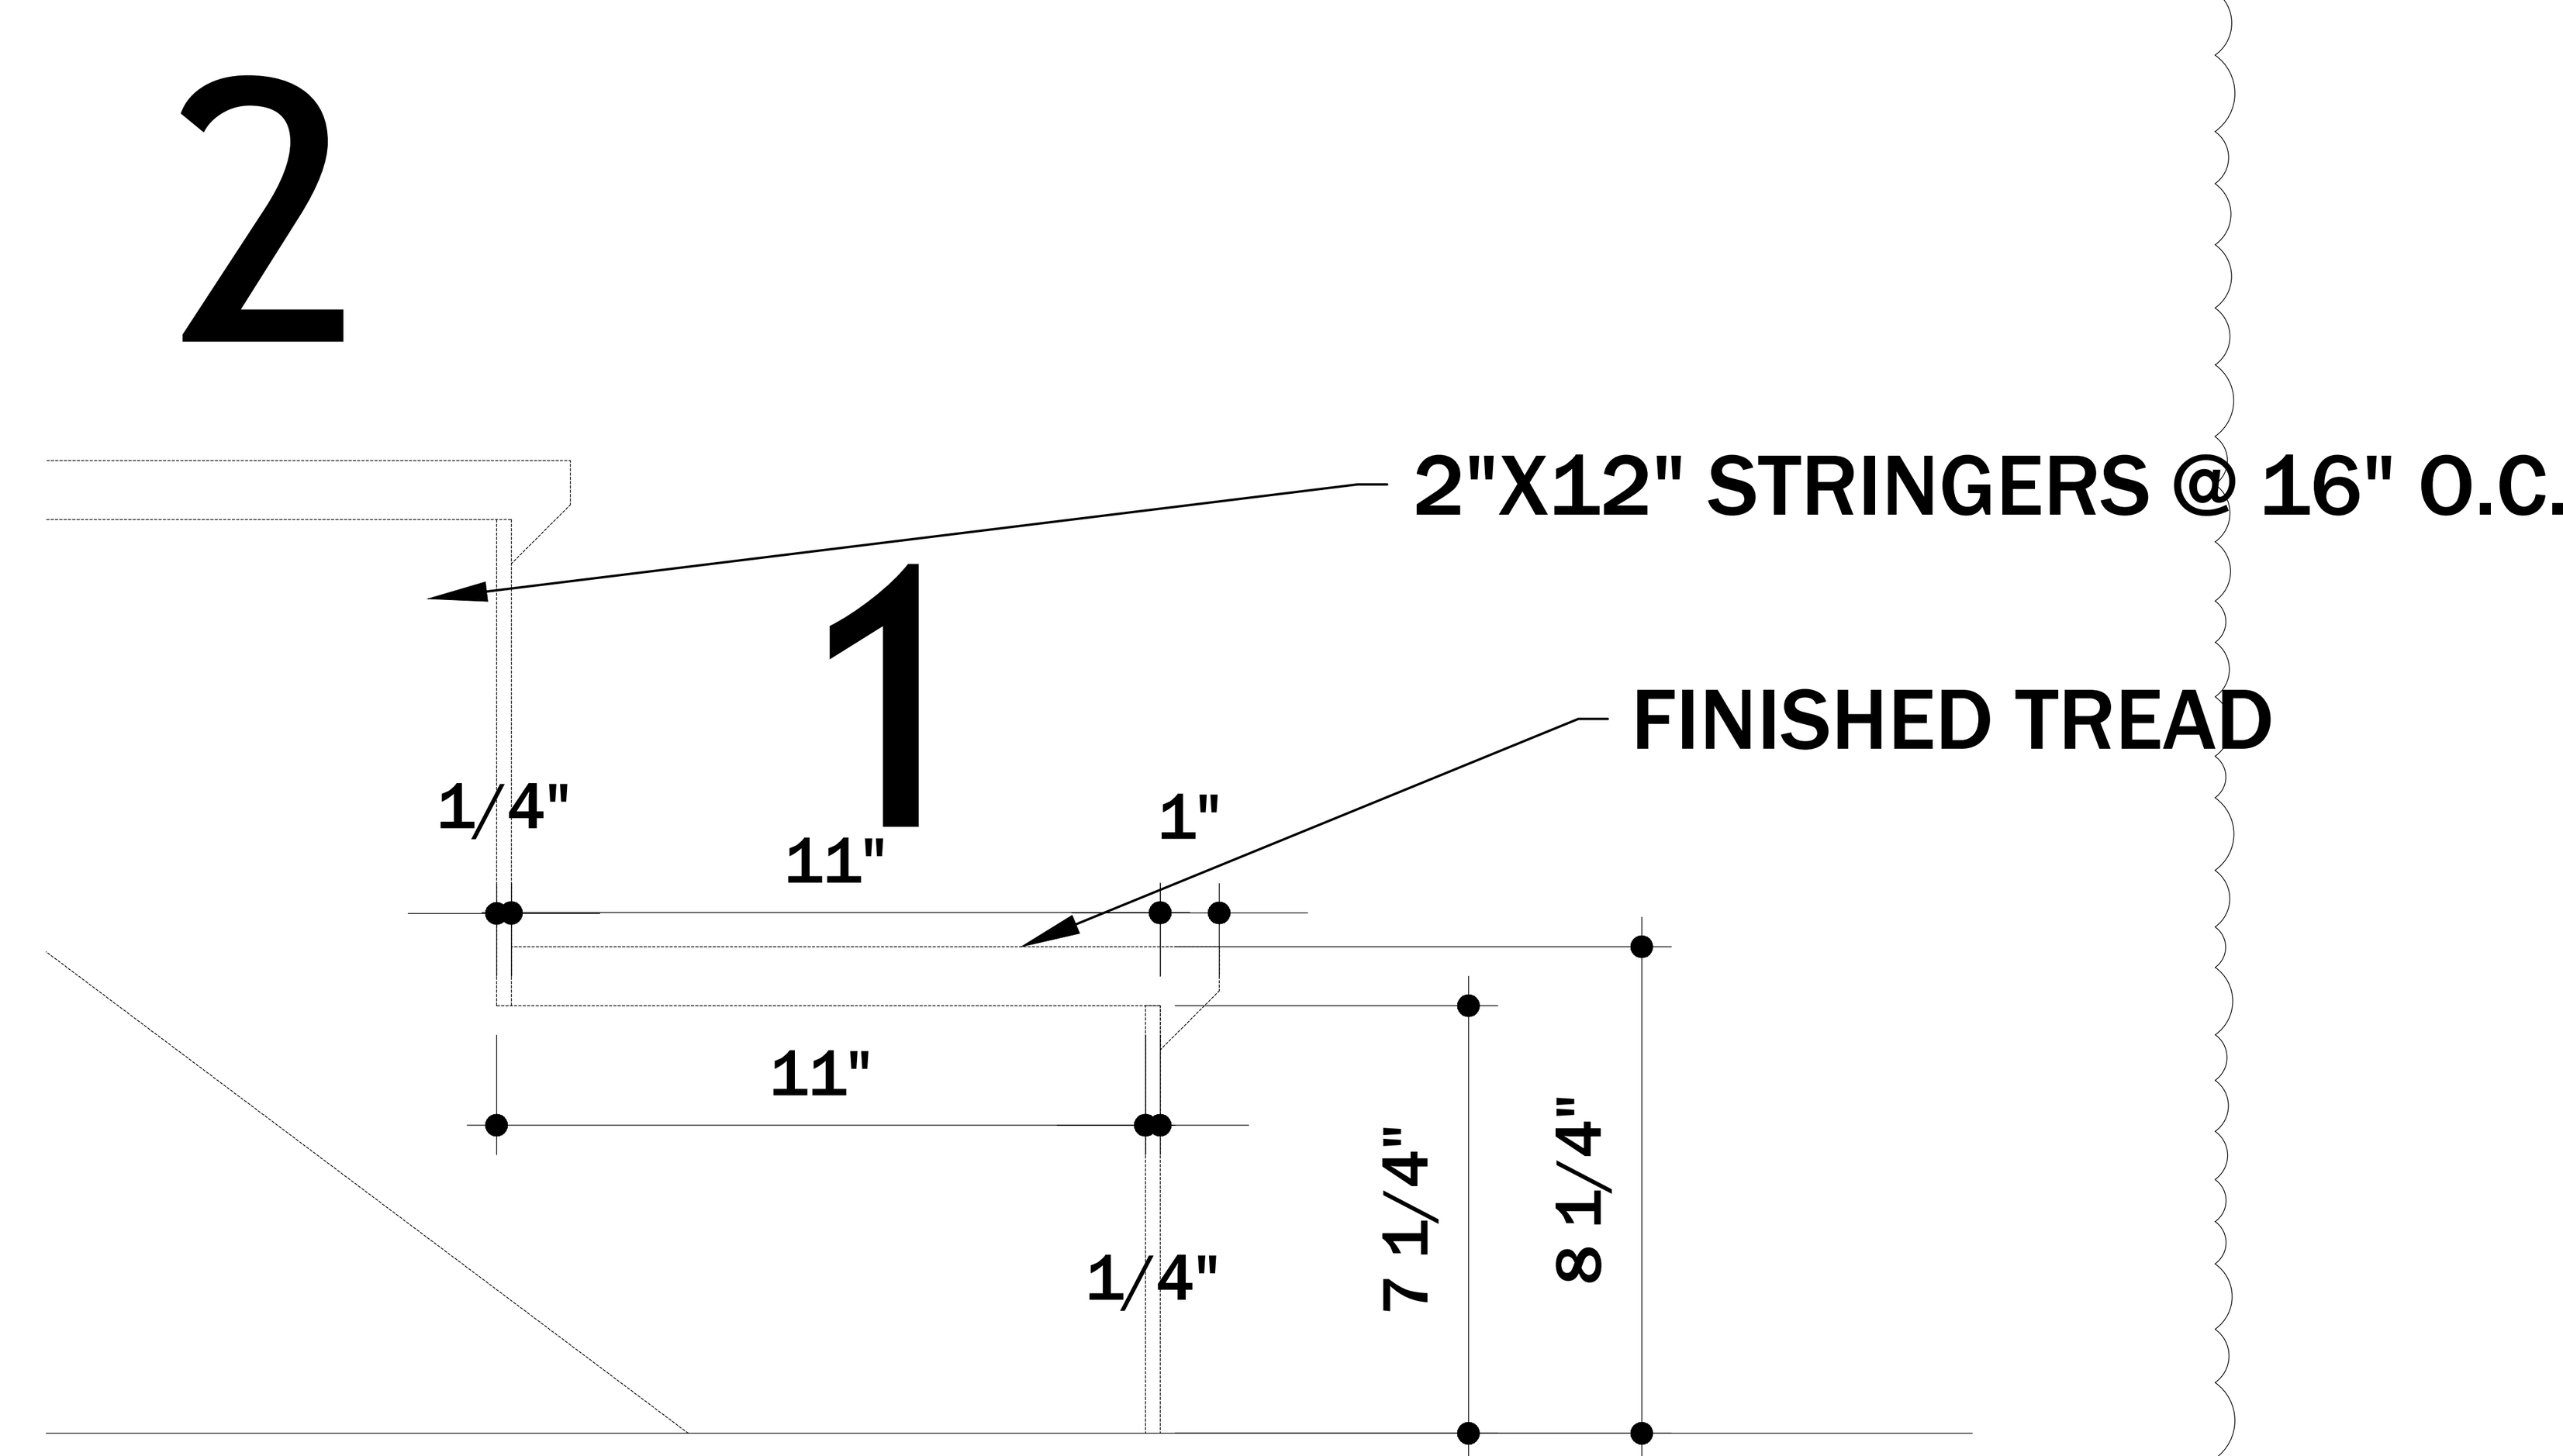


9.31 STAIR DETAIL

SCALE: 3"= 1'

16-32 DRAFTING, LLC
2430 WESTWOOD AVE, SUITE 202
RICHMOND, VA 23230

THE VASQUEZ, RESIDENCE

2ND LEVEL FLOOR PLAN
5019 JESSUP RD, RICHMOND, VA 23234

| DRAWN BY: | |
|---|---|
| GAH | |
| # | REV.DATE |
| 1 | 05/25/2025 |

A4

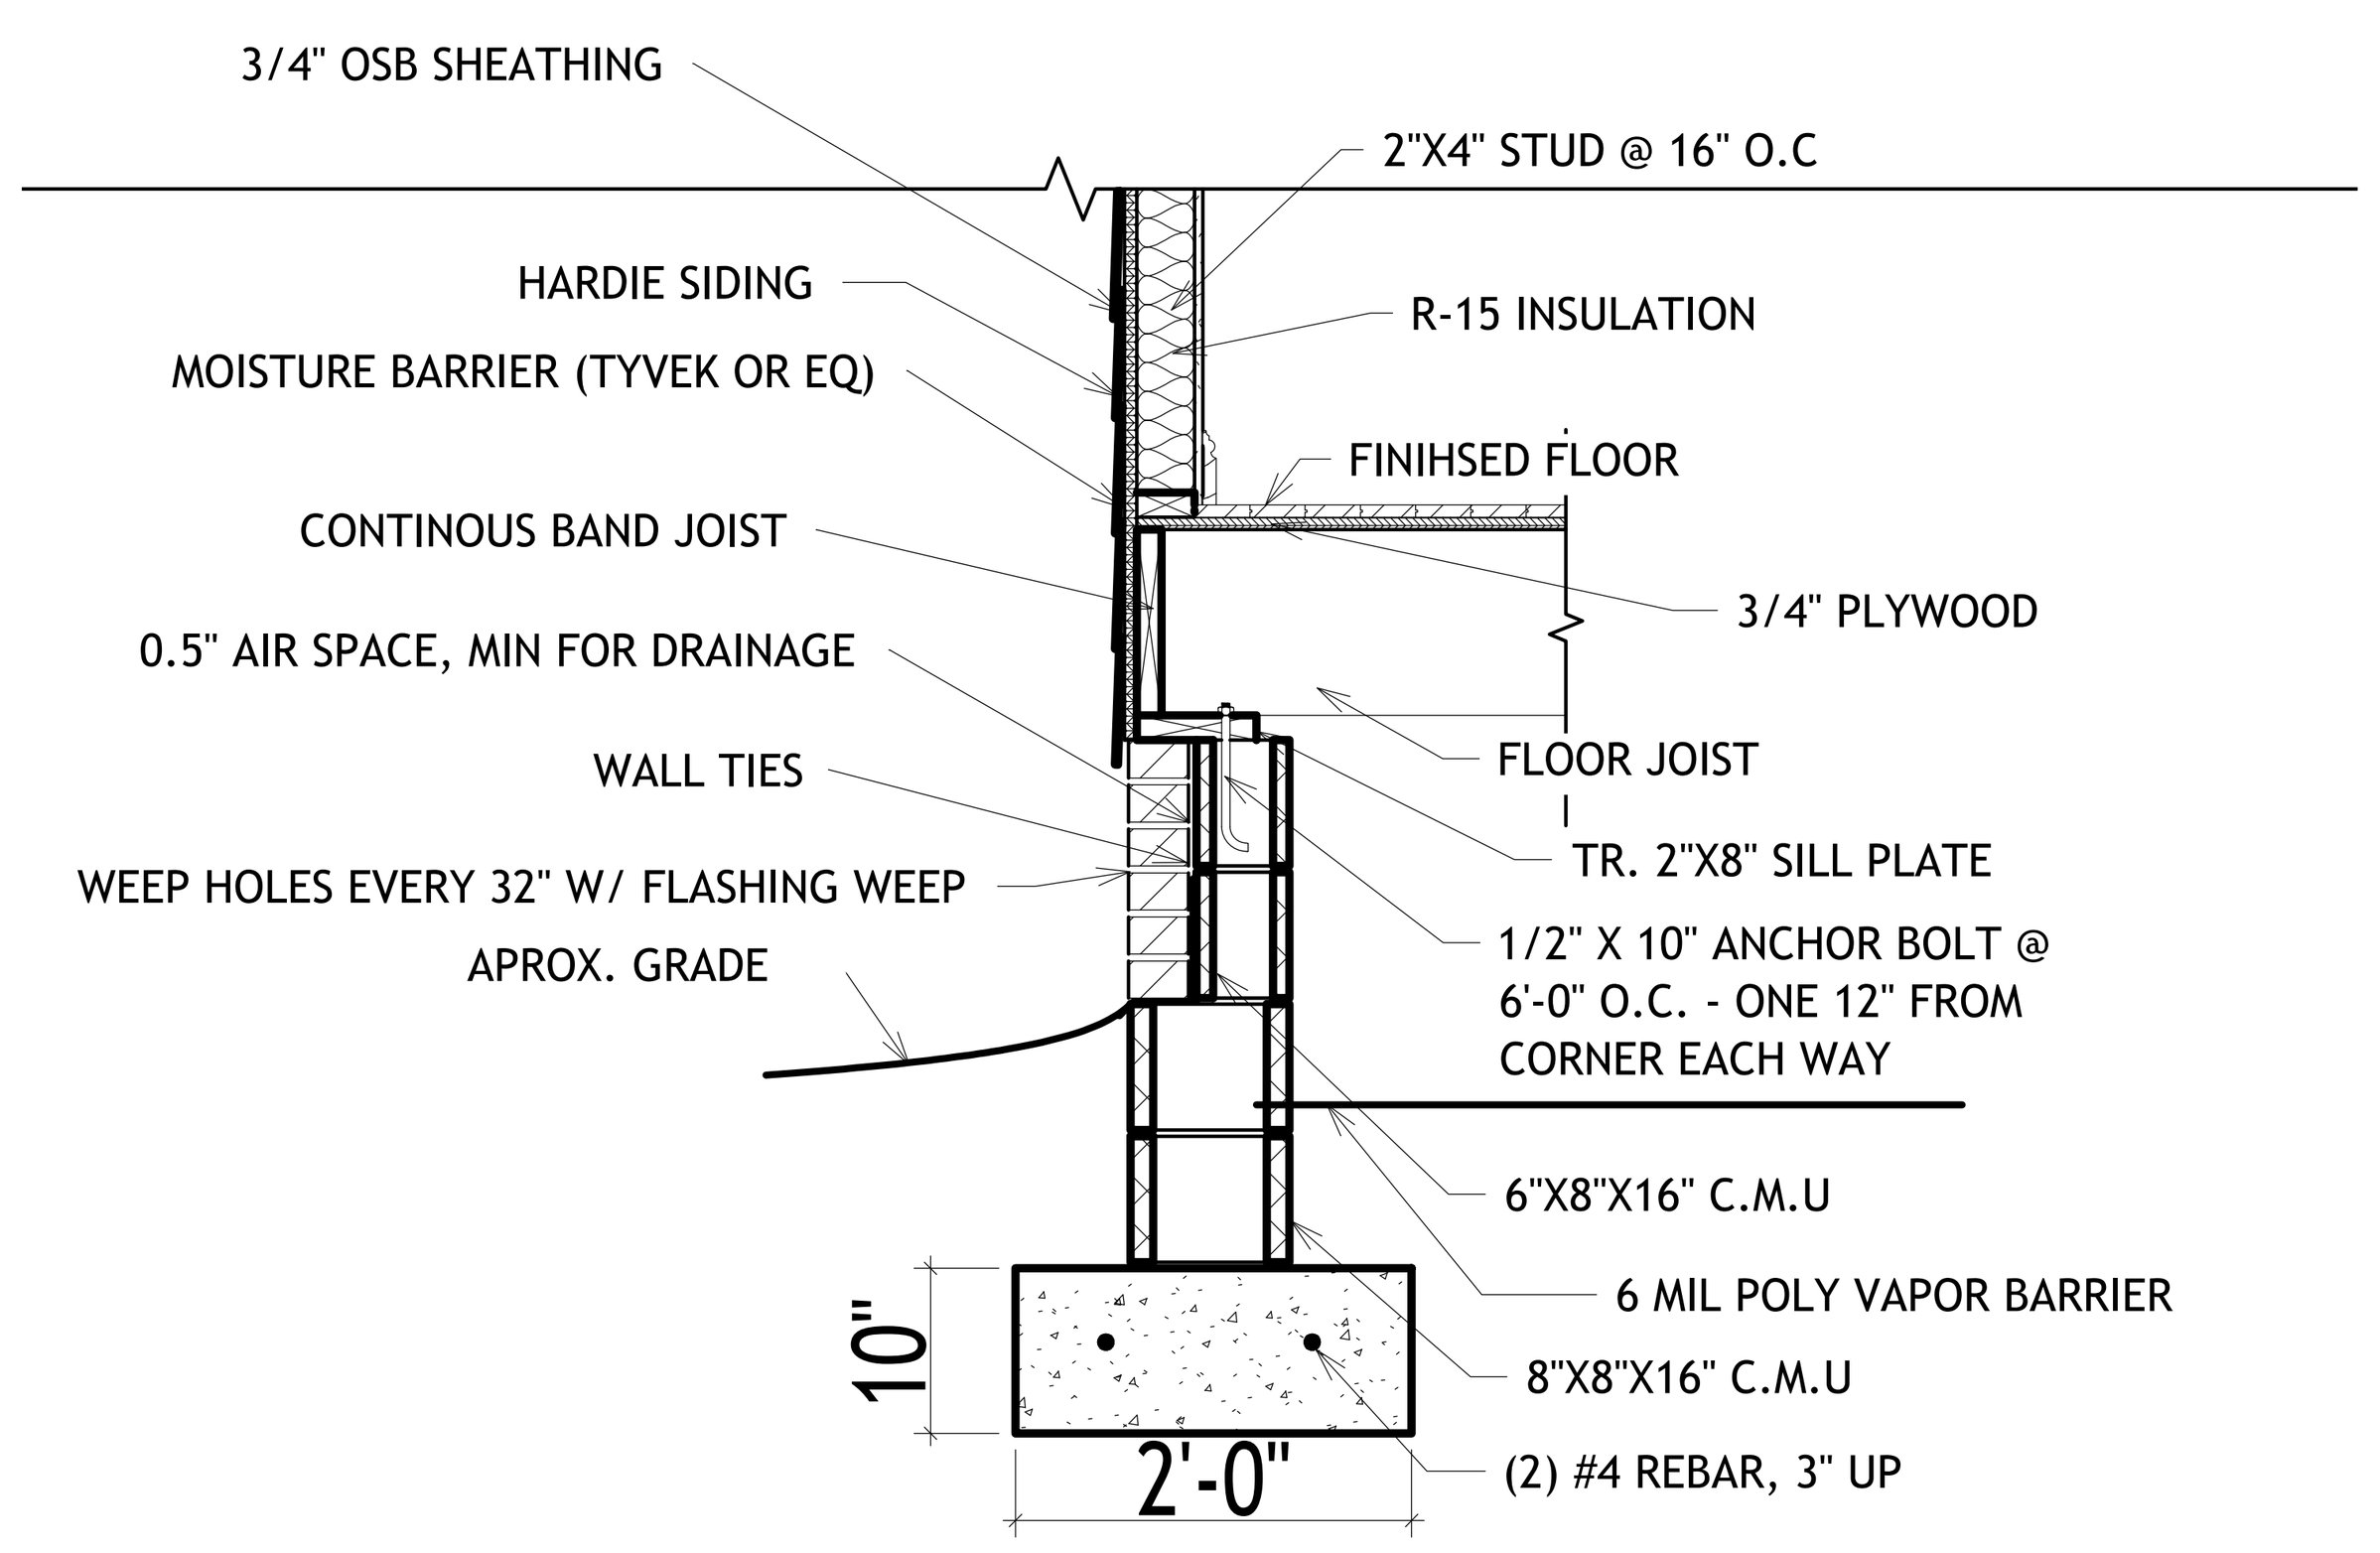


10 FOUNDATION SECTION (TYP)
SCALE: NTS

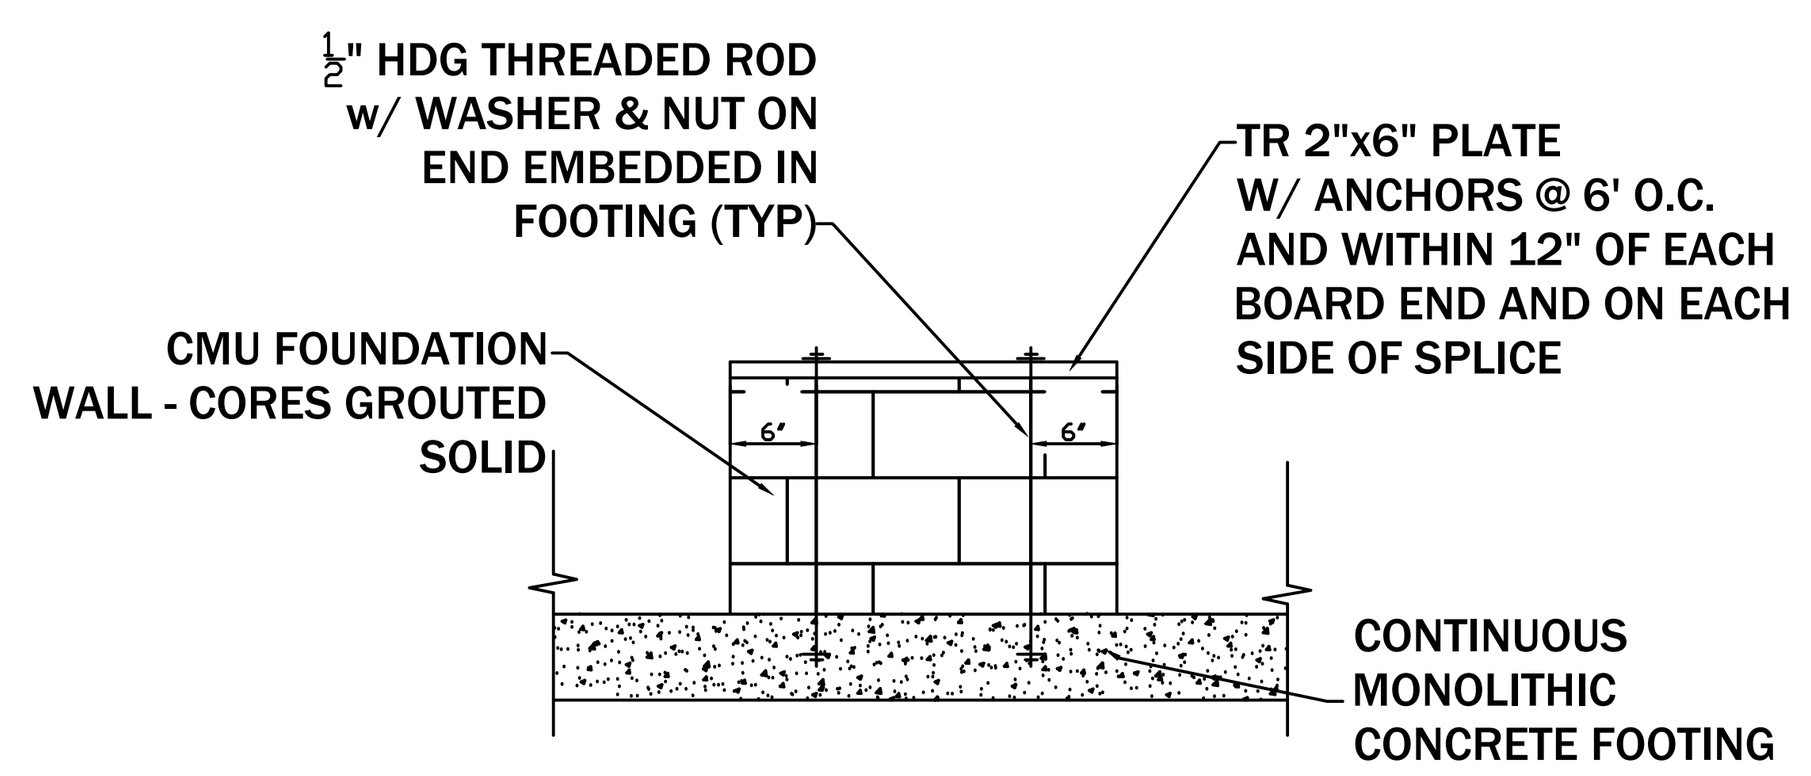


10.1 STEM WALL DETAIL (TYP)
SCALE: NTS

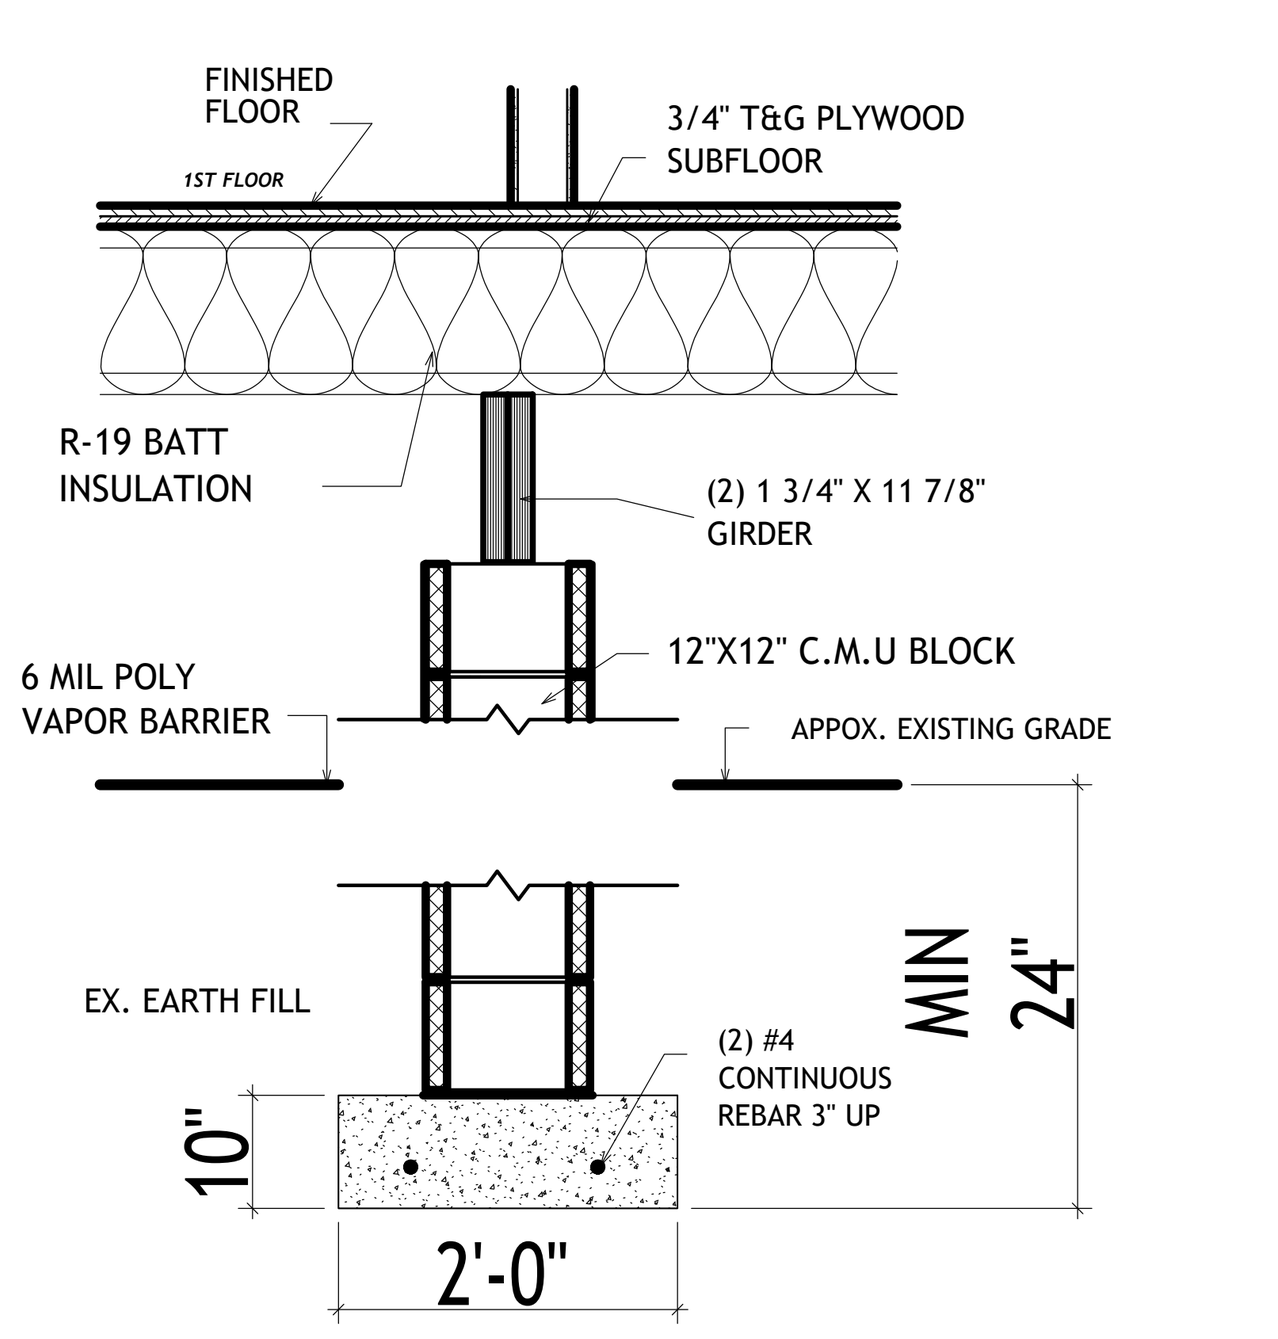


10.2 FOUNDATION PIER SECTION (TYP)
SCALE: NTS

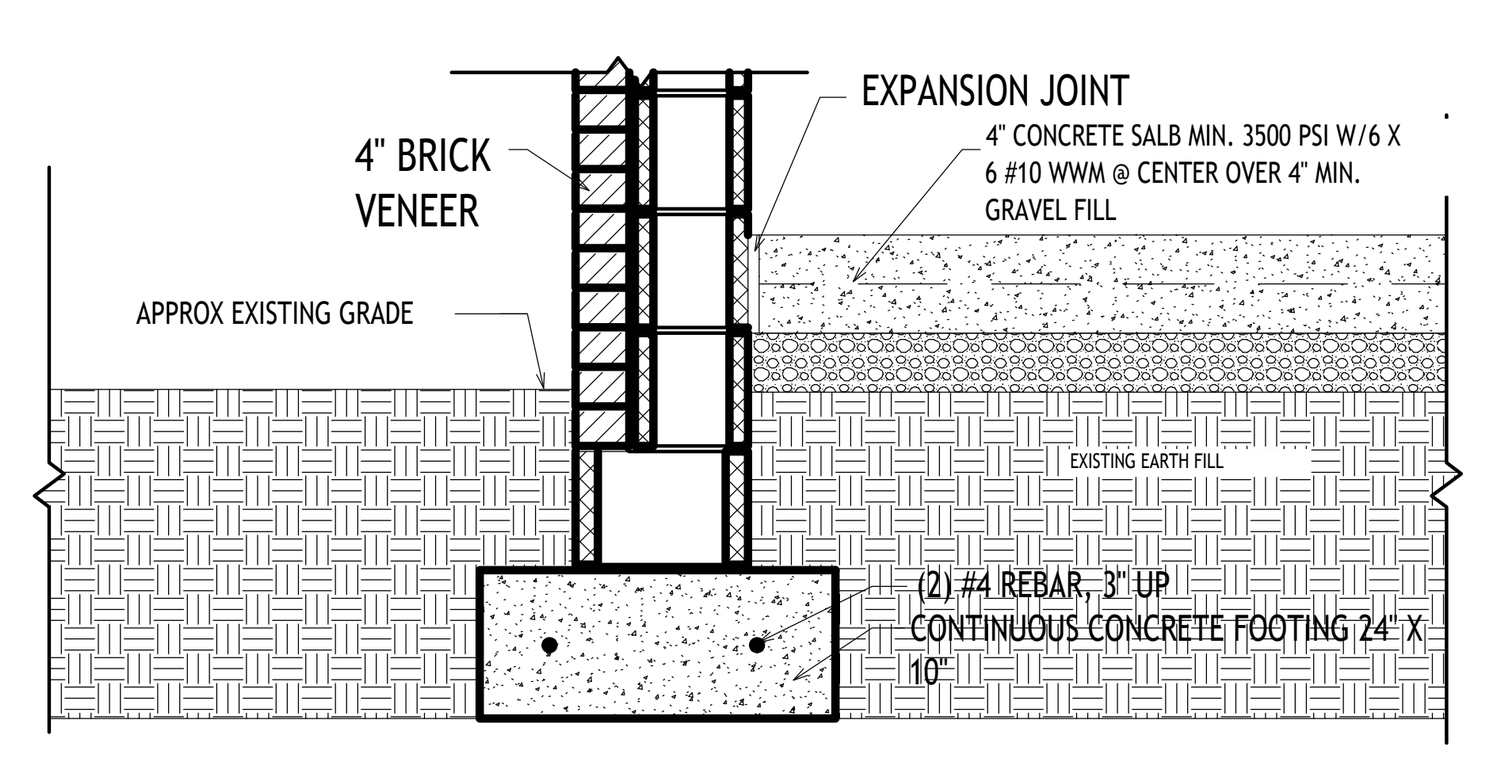


10.3 GARAGE FLOOR SECTION (TYP)
SCALE: NTS

## MASONRY

A. CONCRETE MASONRY UNITS (CMU) SHALL MEET THE FOLLOWING STANDARDS:
   1. HOLLOW LOAD BEARING: ASTM C-90
   2. SOLID LOAD BEARING: ASTM C-145
   3. HOLLOW NON-LOAD BEARING: ASTM C-129
B. BRICK: TYPE, SIZE, AND BOND TO BE CHOSEN BY OWNER.
C. MORTAR SHALL BE ASTM C-270 TYPE S, AND NO ADMIXTURE WILL BE ALLOWED. COLOR AN JOINT TYPE TO BE CHOSEN BY OWNER.
D. CONTRACTOR SHALL SUBMIT SAMPLES OF BRICK AND MORTAR TO THE CONSTRUCTION MANAGER FOR REVIEW AND APPROVAL PRIOR TO COMMENCEMENT OF CONSTRUCTION.
E. CMU SHALL BE LAID IN RUNNING BOND WITH FLUSH JOINTS.
F. CMU WALL REINFORCING SHALL BE HOT-DIPPED GALVANIZED TRUSS TYPE REINFORCING, 1" LESS THAN WALL THICKNESS, 16" OC VERTICALLY, LAPPED 6" AND WIRE TIED.
G. PROVIDE ALL BRICK TIES, HORIZONTAL REINFORCEMENT, FOUNDATION VENTS, LINTELS, AND ACCESSORIES REQUIRED FOR A COMPLETE JOB.
H. MASONRY FIREPLACES SHALL BE DESIGNED FOR PROPER AIR INTAKE, DRAW, AND CODE COMPLIANCE. INCLUDE DAMPER, CAPS, AND ALL OTHER ACCESSORIES REQUIRED FOR COMPLETE INSTALLATION.

## CONCRETE

A. CONCRETE SHALL NOT BE PLACED ON FROZEN SOILS, OR UNDER CONDITIONS WHICH WILL ADVERSELY AFFECT STRENGTH.
B. FOOTING SIZING ASSUMES A MINIMUM ALLOWABLE SOIL BEARING PRESSURE OF 2000 PSF.
C. CONTRACTOR TO NOTIFY CONSTRUCTION MANAGER IMMEDIATELY IF UNSTABLE/UNSUITABLE SOIL CONDITIONS ARE ENCOUNTERED DURING EXCAVATION.
D. CONCRETE SHALL BE MINIMUM 3000 PSI AT 28 DAYS COMPRESSIVE STRENGTH.
E. CONCRETE SHALL BE AIR ENTRAINED IN ALL EXPOSED EXTERIOR APPLICATIONS.
F. CONCRETE SLABS SHALL BE 4" THICK AND DO NOT REQUIRE WOVEN WIRE MESH REINFORCING UNLESS NOTED OTHERWISE.
G. PROVIDE 4" #57 STONE BENEATH ALL NEW SLABS, UNLESS NOTED OTHERWISE.
H. PROVIDE 6 MIL VAPOR BARRIOR BETWEEN THE SLAB AND STONE.
I. ALL FOOTINGS MUST BE A MINIMUM OF 24" BELOW GRADE AND EXTEND TO UNDISTURBED SOIL OR PROPERLY COMPACTED FILL.


FOUNDATION VENTS TO BE 4' FROM EA. CORNER O.C.

ACCESS PANELS TO BE 6' FROM CORNER O.C.

10.4 FOUNDATION PLAN
SCALE: 1/4" = 1'

**16-32 DRAFTING, LLC**
2430 WESTWOOD AVE, SUITE 202
RICHMOND, VA 23230

# THE VASQUEZ, RESIDENCE

FOUNDATION PLAN
5019 JESSUP RD, RICHMOND, VA 23234

| DRAWN BY: | |
|---|---|
| GAH | |
| # | REV.DATE |

A5

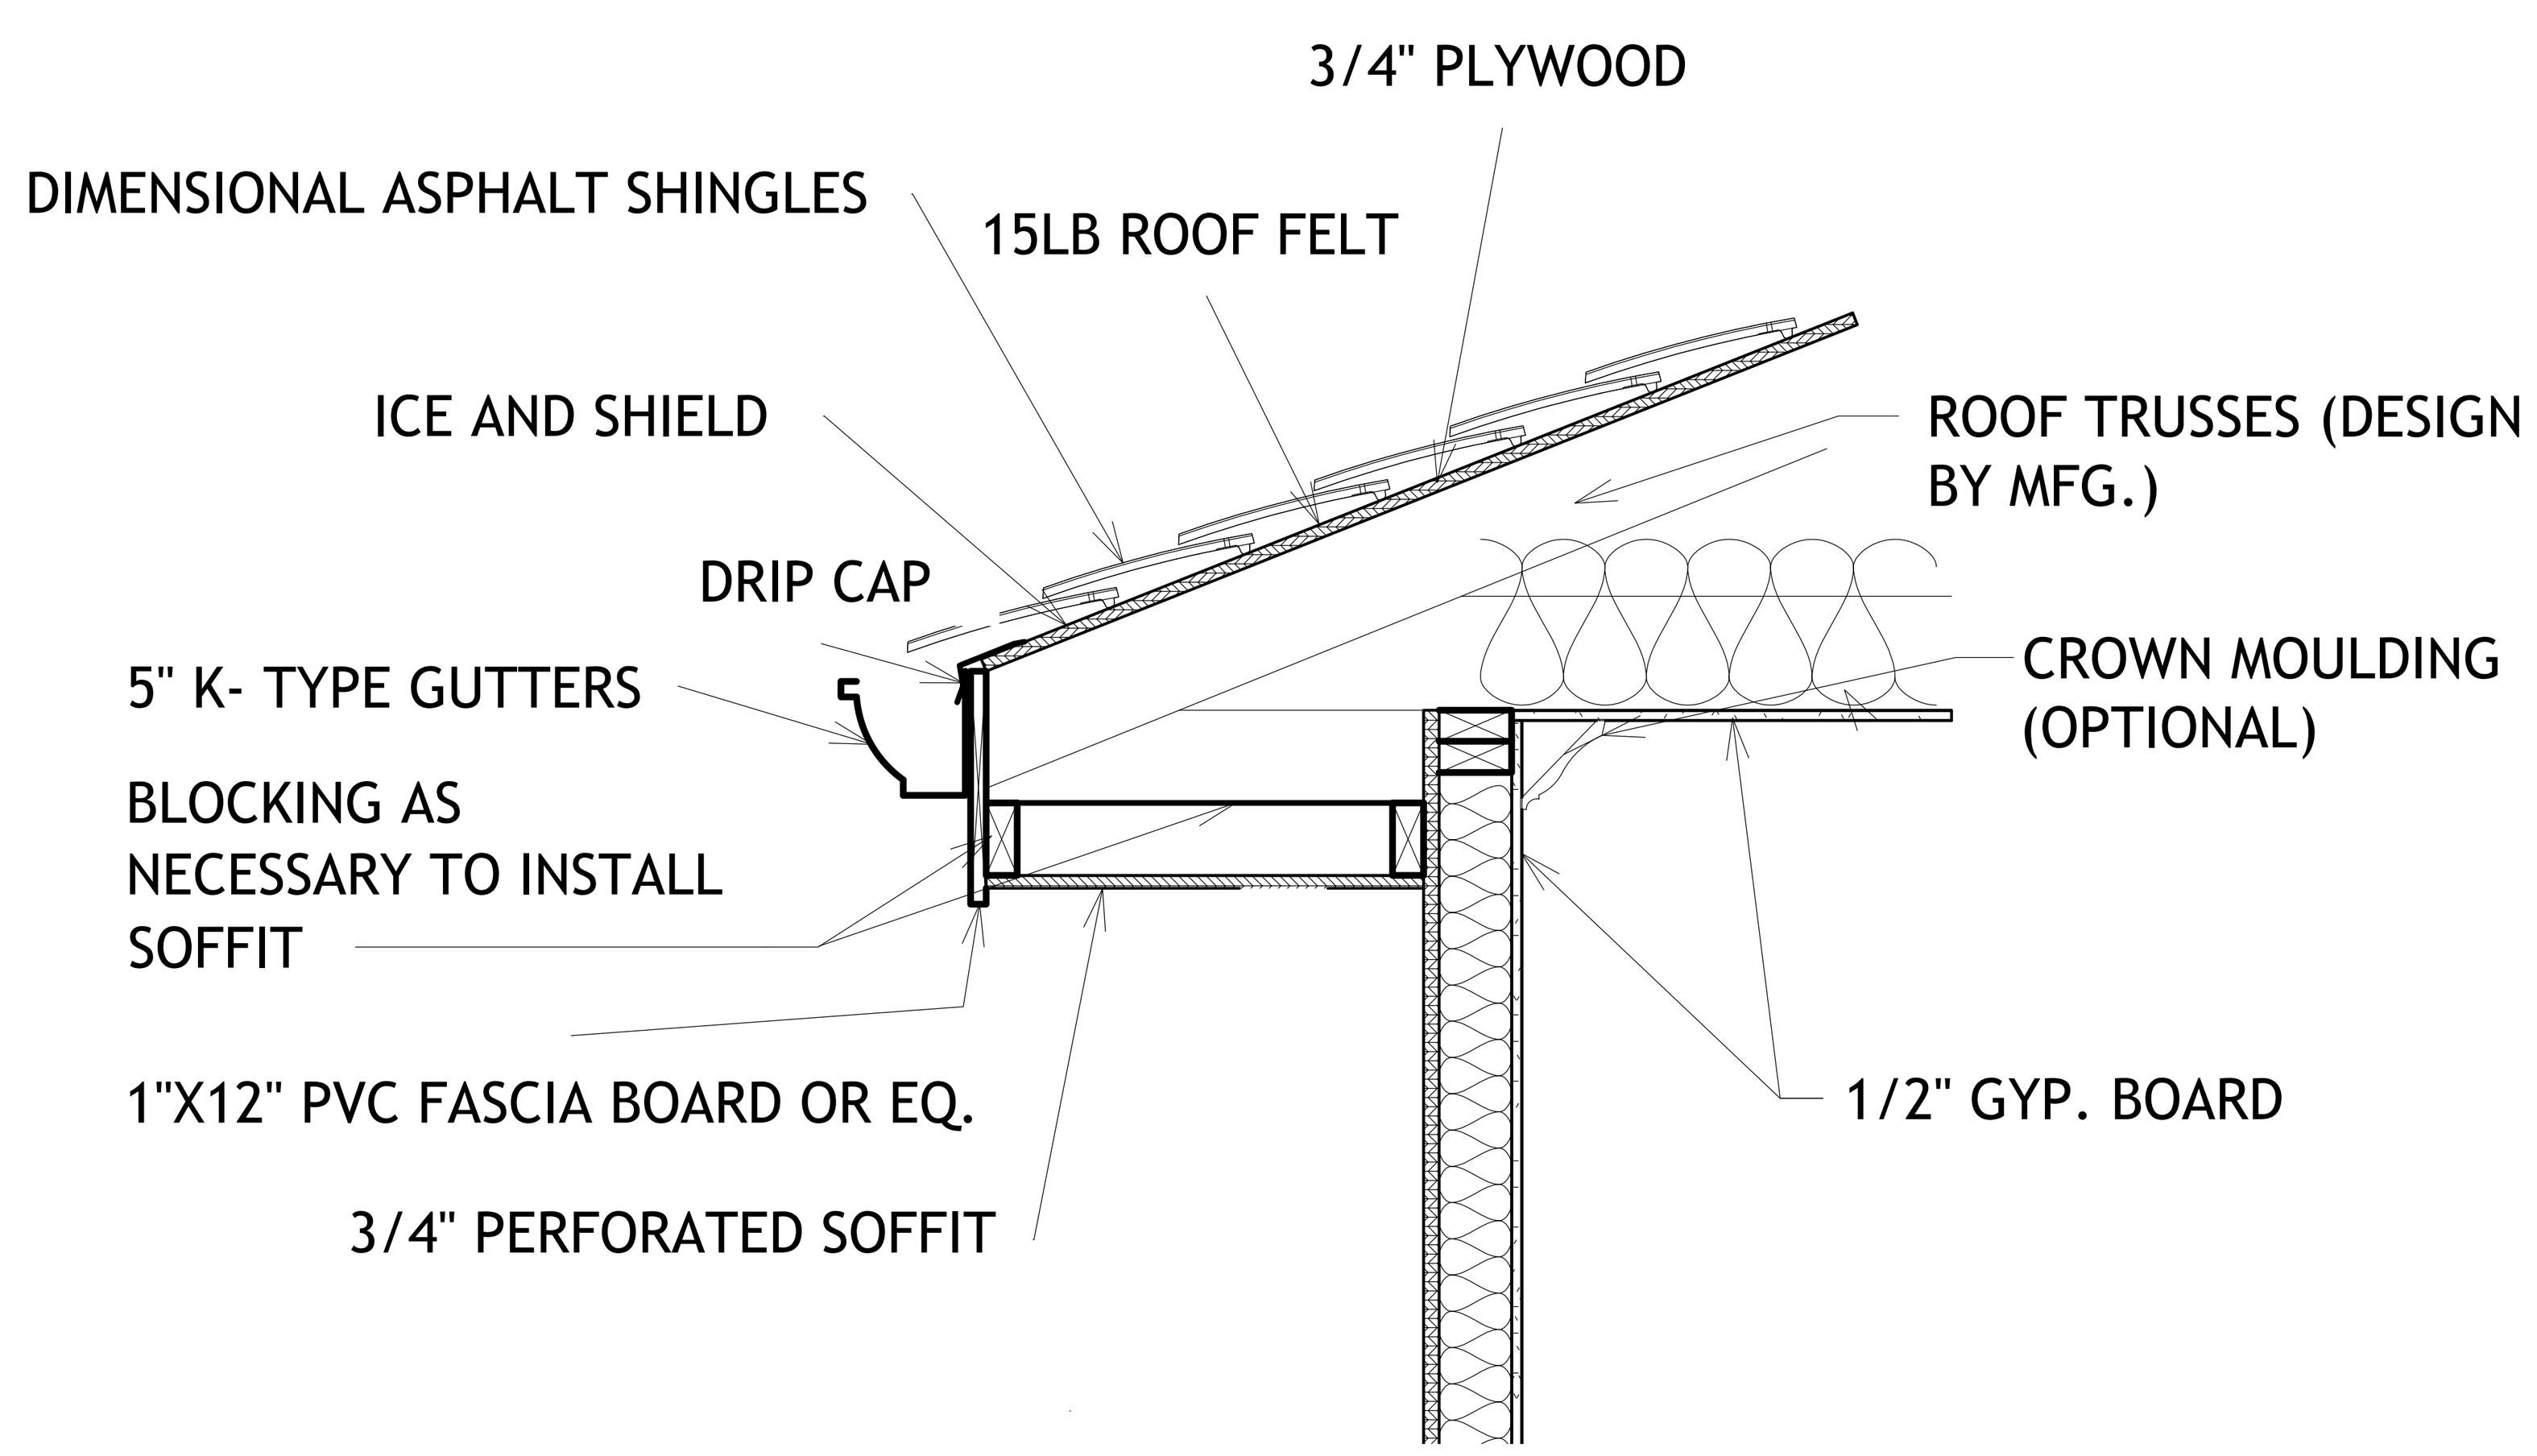


11 ROOF EAVE DETAIL SECTION (TYP)

SCALE: NTS

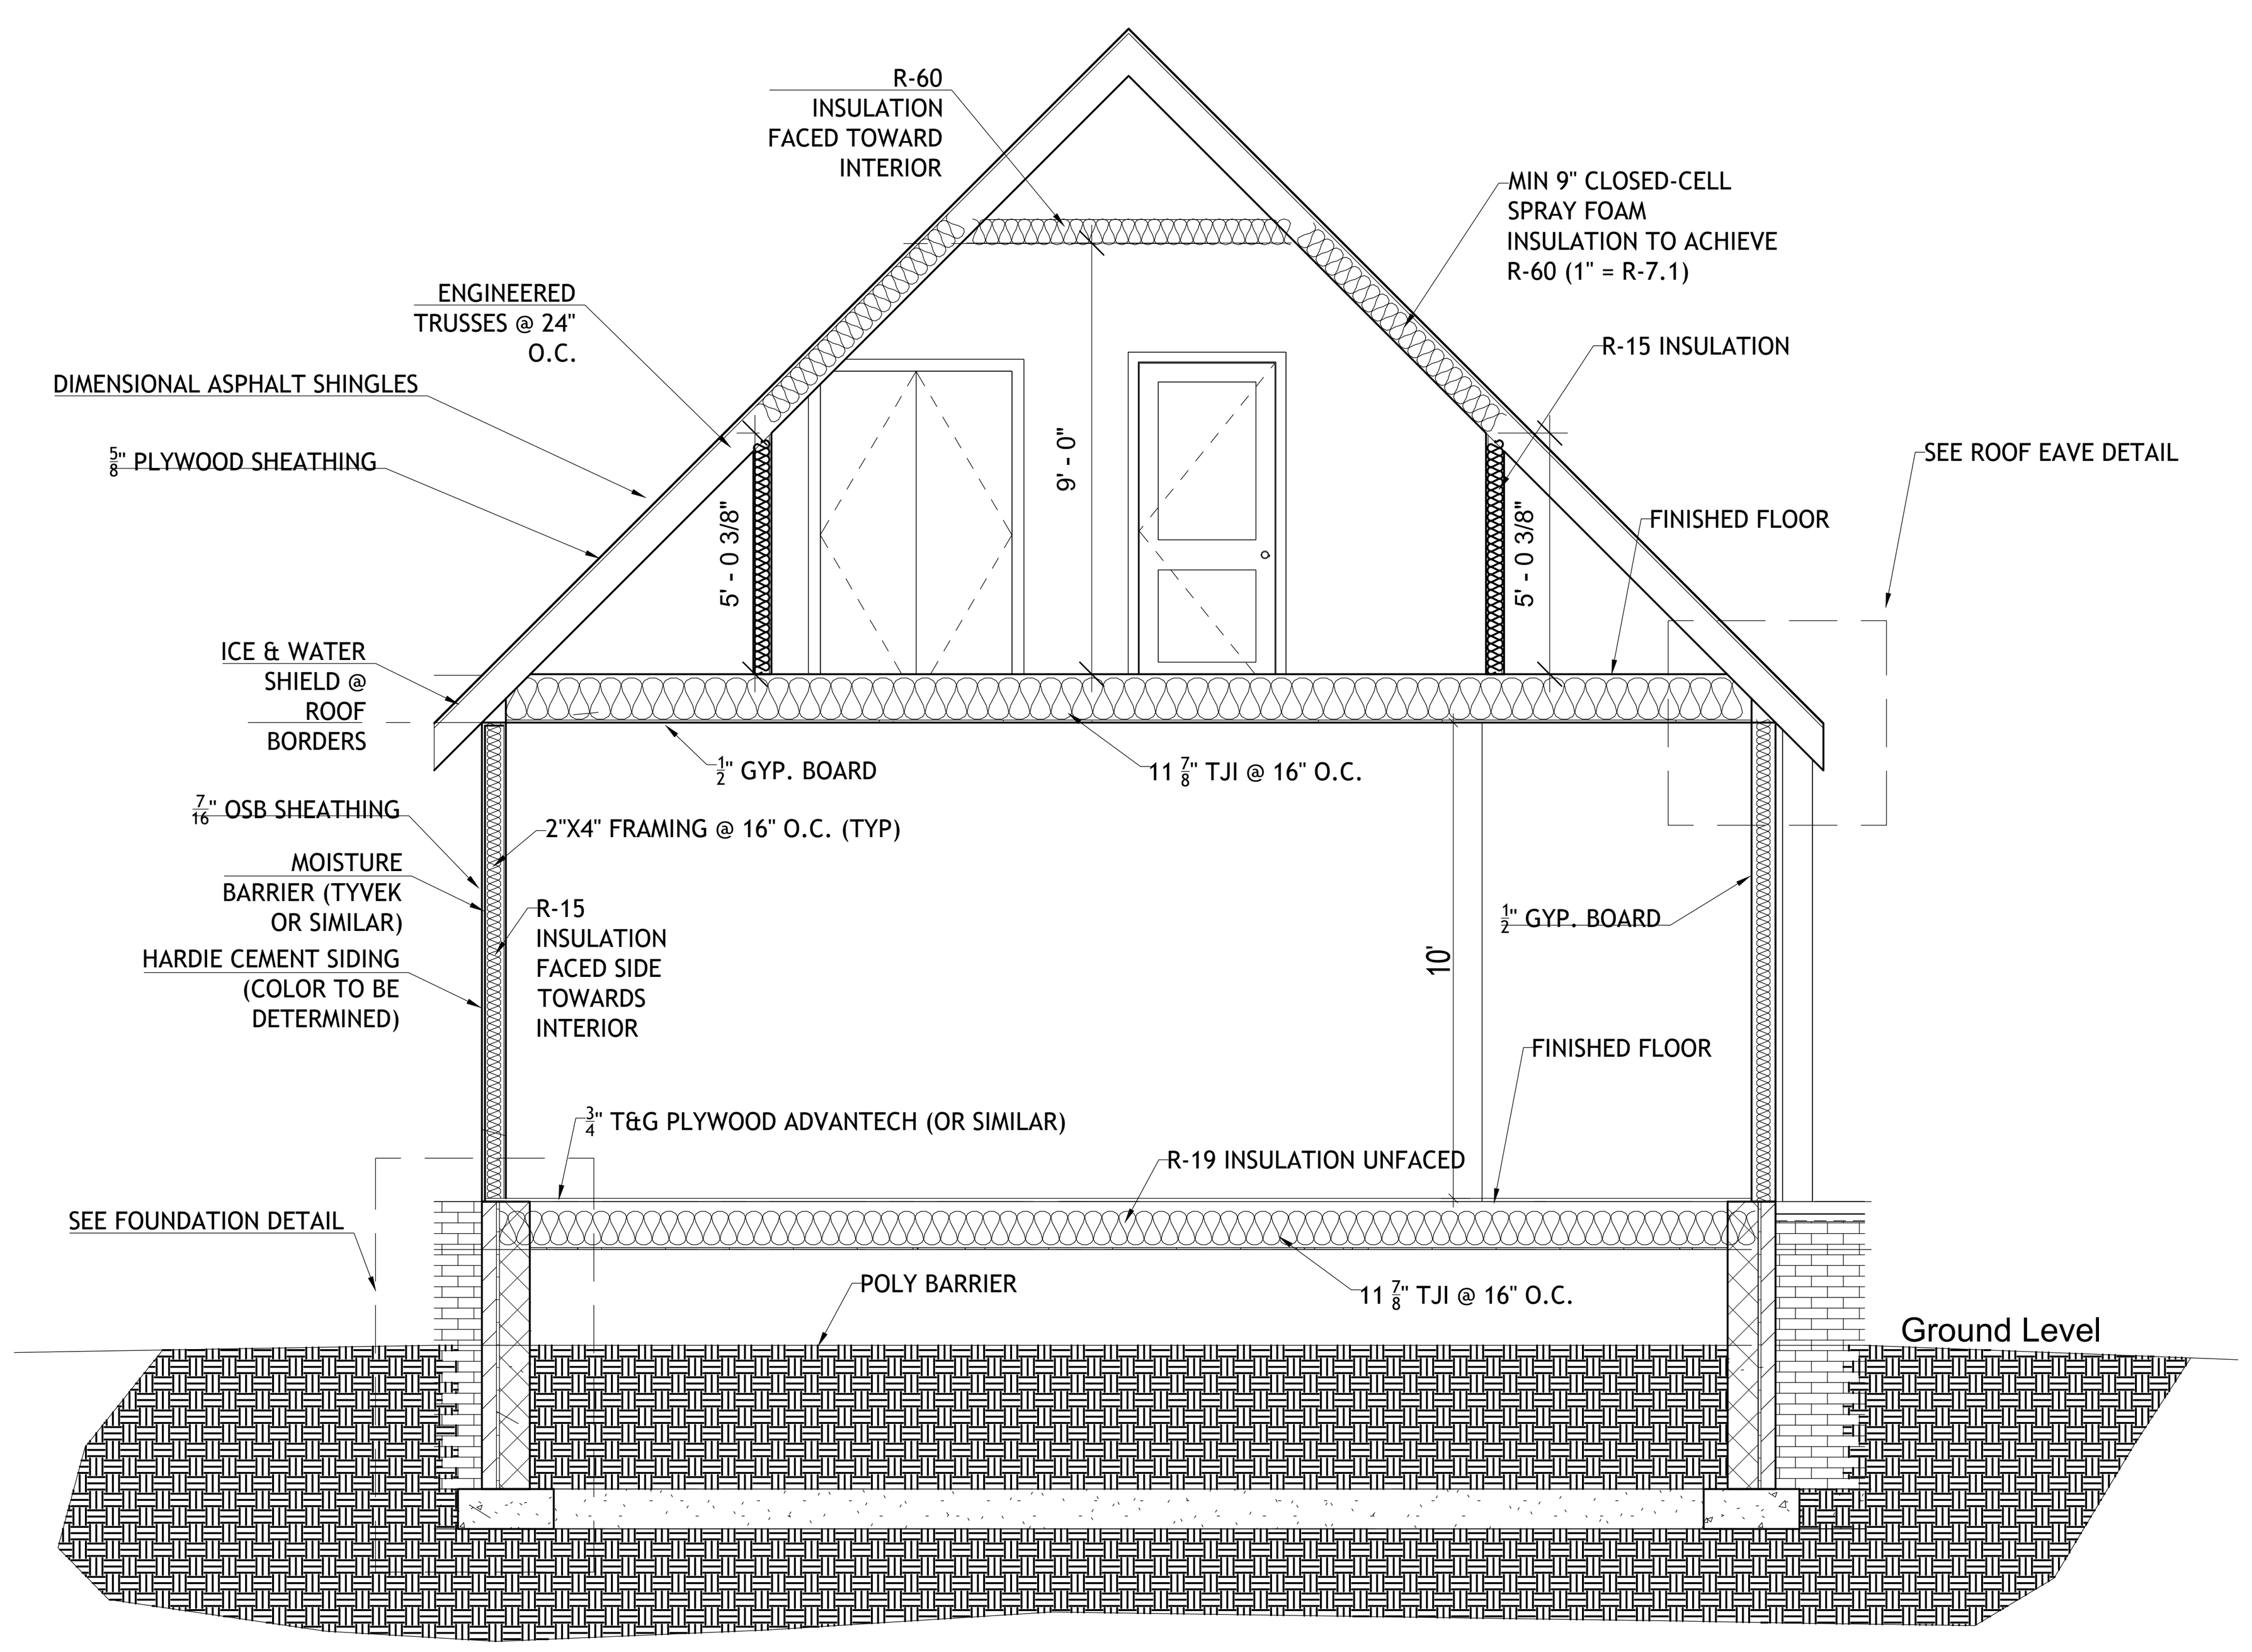


11.1 ROOF GABLE DETAIL SECTION (TYP)

SCALE: NTS

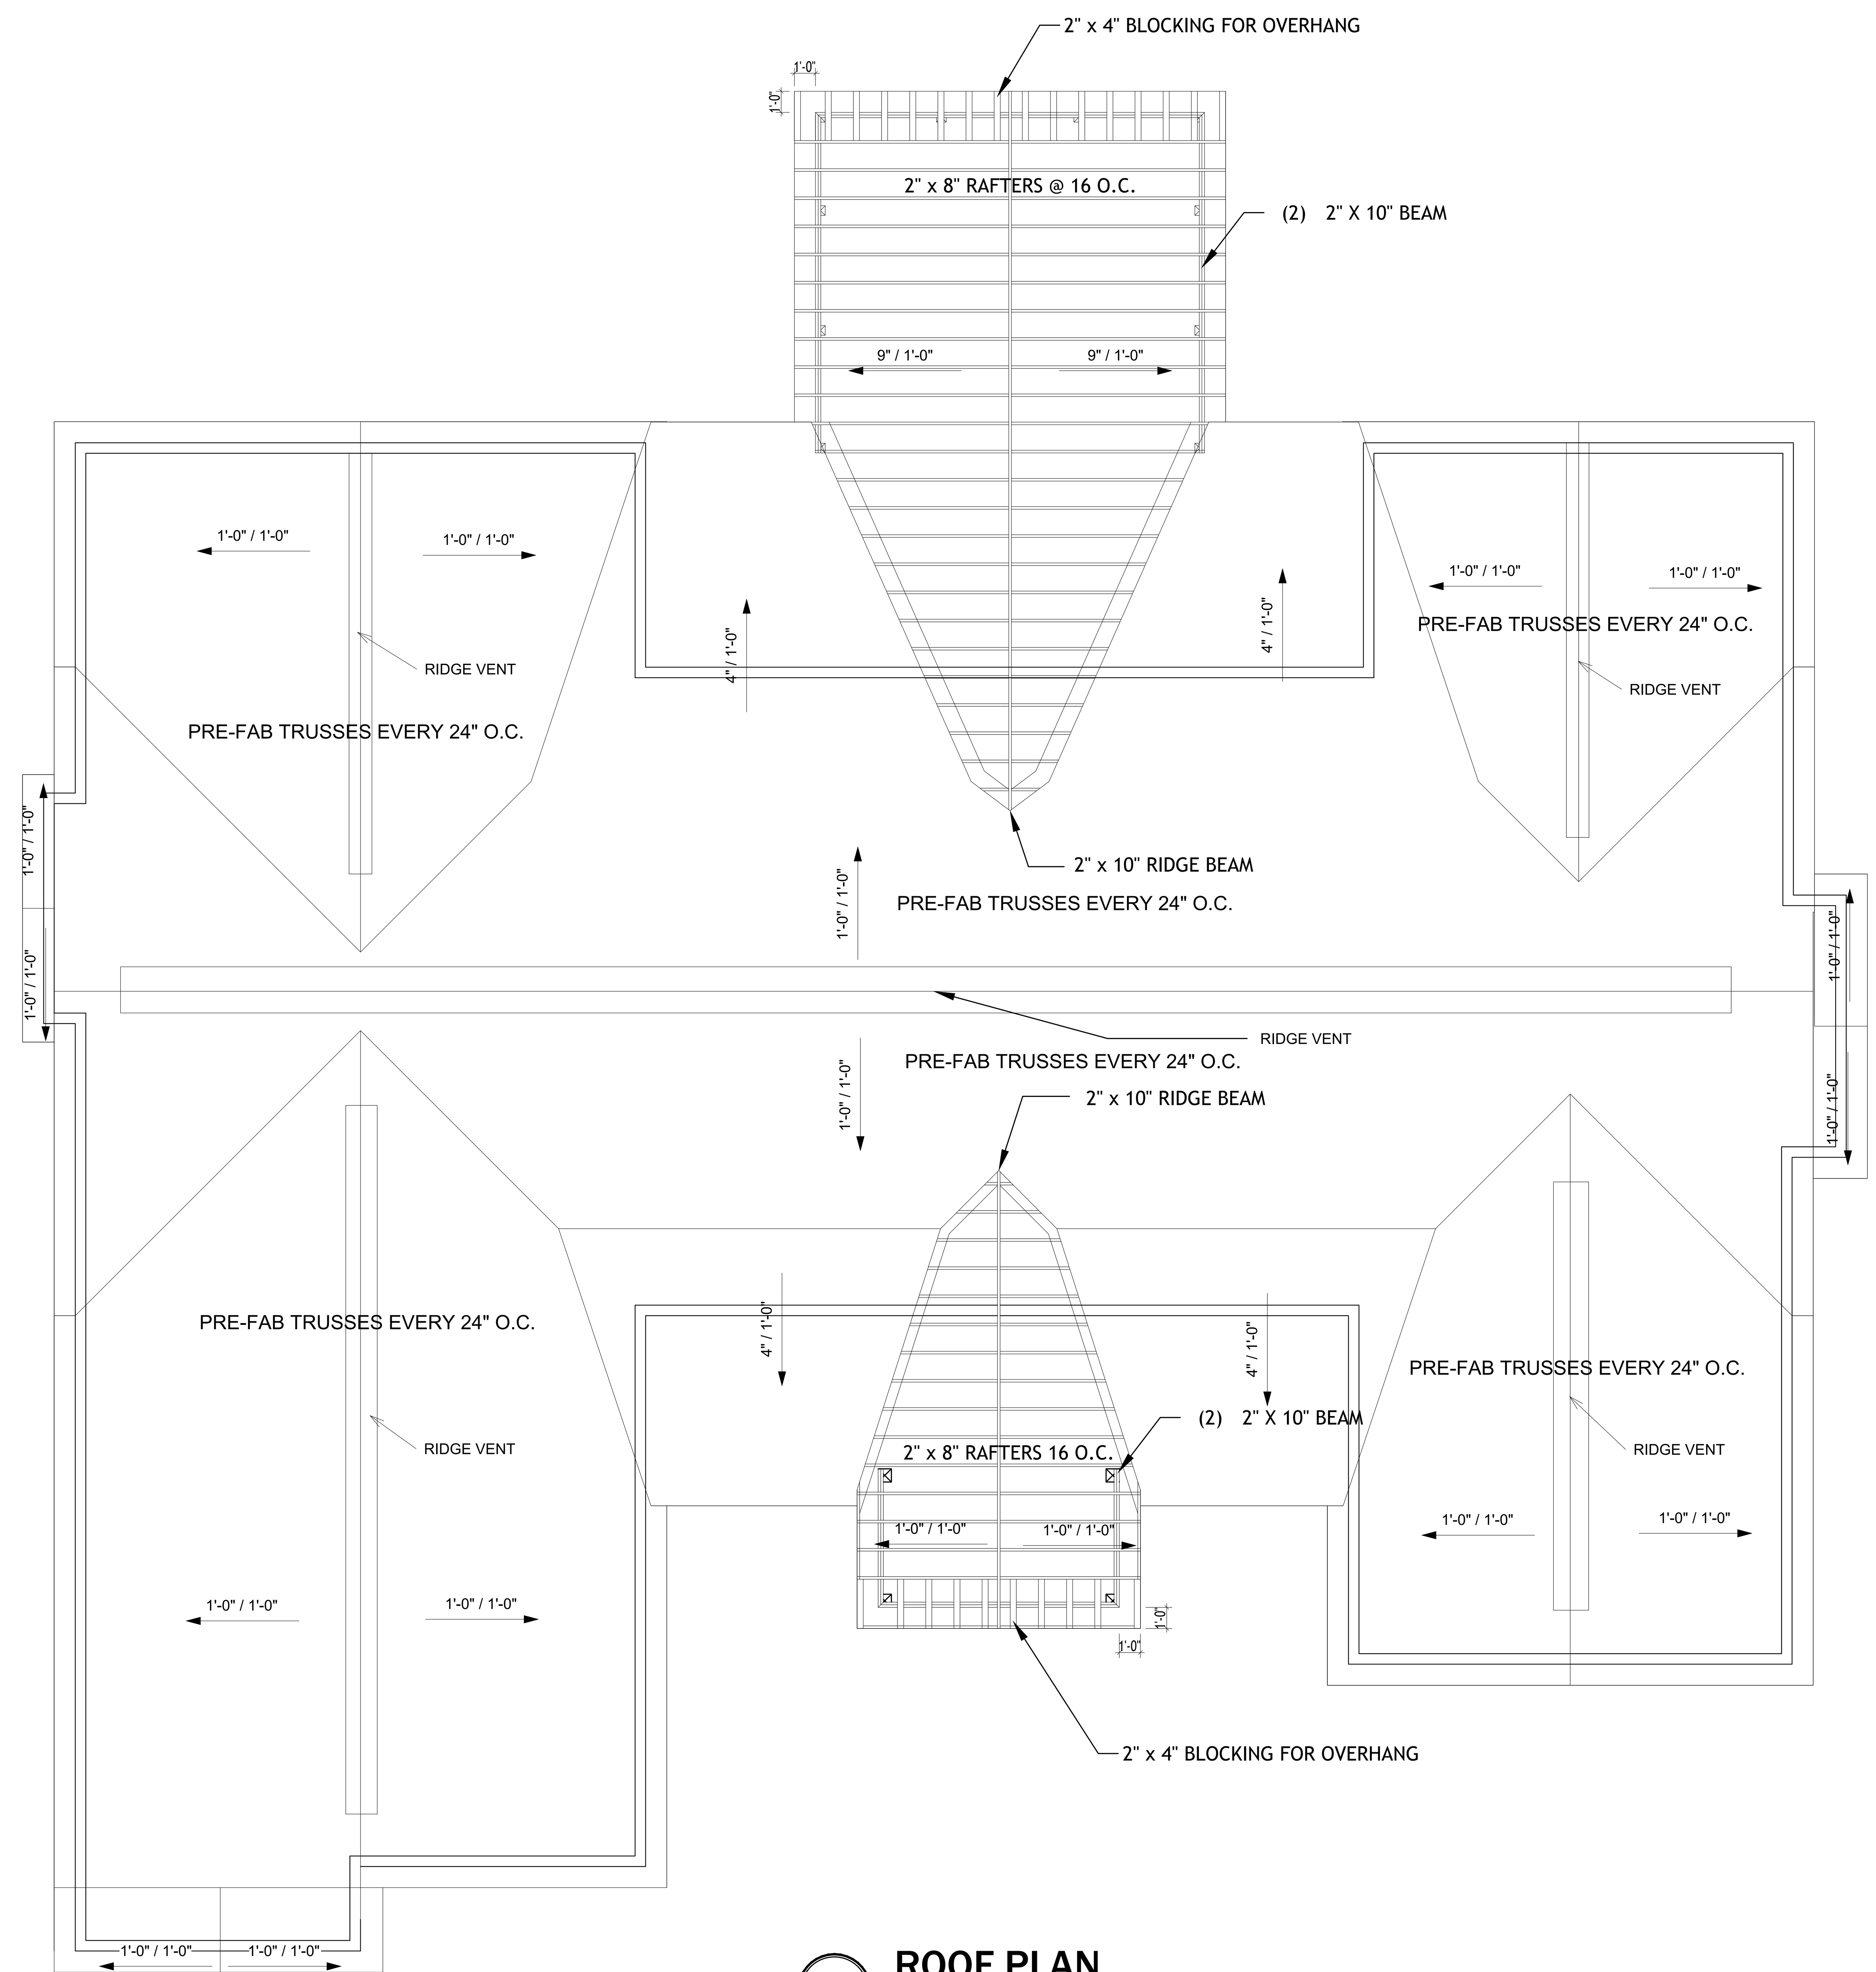


11.2 ROOF PLAN

SCALE: 3/8"= 1'

16-32 DRAFTING, LLC
2430 WESTWOOD AVE, SUITE 202
RICHMOND, VA 23230

THE VASQUEZ, RESIDENCE

ROOF PLAN AND SECTION

5019 JESSUP RD, RICHMOND, VA 23234

DRAWN BY:

GAH

| # | REV.DATE |
| --- | --- |
| | |
| | |
| | |
| | |
| | |

A7

WIND CALCULATION SHEET USING THE CLASSIC METHOD (BASED ON THE 2012 IRC OR 2009 VRC)

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| WIND SPEED (MPH) | | 90 | | 90 | | 90 | | 90 | | 90 | |
| BRACED WALL LINE | | BWL-1 | | BWL-2 | | BWL-3 | | BWL-4 | | BWL-5 | |
| STORY | | | | | | | | | | | |
| BRACED WALL PANEL METHOD | | CS-WSP CS-PF CS-G | | CS-WSP CS-PF CS-G | | CS-WSP CS-PF CS-G | | CS-WSP CS-PF CS-G | | CS-WSP CS-PF CS-G | |
| AVG BWL SPACING (ft) | | 17 | | 28 | | 17 | | 28 | | 17 | |
| TABULAR REQUIRED (ft) | | | 3.05 | | 4.70 | | 3.05 | | 4.70 | | 3.05 |
| ADJUSTMENT: EXPOSURE | | B | 1.00 | B | 1.00 | B | 1.00 | B | 1.00 | B | 1.00 |
| EAVE-RIDGE HT (ft) | | 12.00 | 1.07 | 16.00 | 1.30 | 16.00 | 1.30 | 16.00 | 1.30 | 14.50 | 1.26 |
| WALL HEIGHT (ft) | | 9.00 | 0.95 | 9.00 | 0.95 | 9.00 | 0.95 | 9.00 | 0.95 | 9.00 | 0.95 |
| # BWLs | | ≥5 | 1.60 | 4.00 | 1.45 | ≥5 | 1.60 | 4.00 | 1.45 | ≥5 | 1.60 |
| OMIT INTERIOR GB | | NO | 1.00 | NO | 1.00 | NO | 1.00 | NO | 1.00 | NO | 1.00 |
| ADD PAIR 800# HOLD DOWNS | | NO | 1.00 | NO | 1.00 | NO | 1.00 | NO | 1.00 | NO | 1.00 |
| METHOD GB FASTEN @ 4" o.c | | NO | 1.00 | NO | 1.00 | NO | 1.00 | NO | 1.00 | NO | 1.00 |
| REQUIRED BWP LENGTH (ft) | | | 4.98 | | 8.42 | | 6.03 | | 8.42 | | 5.85 |
| ACTUAL BWP: CONTRIBUTING LENGTH | BWP | METHOD | LENGTH (ft) | METHOD | LENGTH (ft) | METHOD | LENGTH (ft) | METHOD | LENGTH (ft) | METHOD | LENGTH (ft) |
| | 1 | CS-WSP | 4.00 | CS-WSP | 4.00 | CS-WSP | 4.00 | CS-WSP | 4.00 | CS-WSP | 3.50 |
| | 2 | CS-WSP | 4.00 | CS-WSP | 2.50 | CS-WSP | 2.50 | CS-WSP | 4.00 | CS-WSP | 3.50 |
| | 3 | | | CS-WSP | 2.00 | | | CS-WSP | 2.00 | | |
| | 4 | | | | | | | | | | |
| | 5 | | | | | | | | | | |
| | 6 | | | | | | | | | | |
| | 7 | | | | | | | | | | |
| ACTUAL BWP LENGTH (ft) | | 8.00 | | 8.50 | | 6.50 | | 10.00 | | 7.00 | |
| ACTUAL ≥ REQUIRED | | YES | | YES | | YES | | YES | | YES | |
| SPACE: BWPs ≤ 20' APART | | YES | | YES | | YES | | YES | | YES | |
| # of BWPs: Length of BWL (ft) | | 21 | | 16.5 | | 33.5 | | 26 | | 27 | |
| # of BWPs: BWP 1 ≤ 16', 2 > 16' | | YES | | YES | | YES | | YES | | YES | |
| ENDS: BWP WITHIN 10' OF END | | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| ENDS: CONTINUOUS END CONDITION | | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| BWL COMPLIANCE PASS-FAIL | | PASS | | PASS | | PASS | | PASS | | PASS | |

WIND CALCULATION SHEET USING THE CLASSIC METHOD (BASED ON THE 2012 IRC OR 2009 VRC)

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| WIND SPEED (MPH) | | 90 | | 90 | | 90 | | 90 | | 90 | |
| BRACED WALL LINE | | BWL-6 | | BWL-7 | | BWL-8 | | BWL-9 | | BWL-10 | |
| STORY | | | | | | | | | | | |
| BRACED WALL PANEL METHOD | | CS-WSP CS-PF CS-G | | CS-WSP CS-PF CS-G | | CS-WSP CS-PF CS-G | | CS-WSP CS-PF CS-G | | CS-WSP CS-PF CS-G | |
| AVG BWL SPACING (ft) | | 28 | | 17 | | 17 | | 17 | | 28 | |
| TABULAR REQUIRED (ft) | | | 4.70 | | 3.05 | | 3.05 | | 3.05 | | 4.70 |
| ADJUSTMENT: EXPOSURE | | B | 1.00 | B | 1.00 | B | 1.00 | B | 1.00 | B | 1.00 |
| EAVE-RIDGE HT (ft) | | 16.00 | 1.30 | 14.50 | 1.26 | 16.00 | 1.30 | 11.00 | 1.00 | 16.00 | 1.30 |
| WALL HEIGHT (ft) | | 9.00 | 0.95 | 9.00 | 0.95 | 9.00 | 0.95 | 9.00 | 0.95 | 9.00 | 0.95 |
| # BWLs | | 4.00 | 1.45 | ≥5 | 1.60 | ≥5 | 1.60 | 4.00 | 1.45 | 4.00 | 1.45 |
| OMIT INTERIOR GB | | NO | 1.00 | NO | 1.00 | NO | 1.00 | NO | 1.00 | NO | 1.00 |
| ADD PAIR 800# HOLD DOWNS | | NO | 1.00 | NO | 1.00 | NO | 1.00 | NO | 1.00 | NO | 1.00 |
| METHOD GB FASTEN @ 4" o.c | | NO | 1.00 | NO | 1.00 | NO | 1.00 | NO | 1.00 | NO | 1.00 |
| REQUIRED BWP LENGTH (ft) | | | 8.42 | | 5.85 | | 6.03 | | 4.20 | | 8.42 |
| ACTUAL BWP: CONTRIBUTING LENGTH | BWP | METHOD | LENGTH (ft) | METHOD | LENGTH (ft) | METHOD | LENGTH (ft) | METHOD | LENGTH (ft) | METHOD | LENGTH (ft) |
| | 1 | CS-WSP | 4.00 | CS-WSP | 4.00 | CS-WSP | 4.00 | CS-WSP | 4.00 | CS-WSP | 4.00 |
| | 2 | CS-WSP | 4.00 | CS-WSP | 4.00 | CS-WSP | 2.50 | CS-WSP | 4.00 | CS-WSP | 4.00 |
| | 3 | CS-WSP | 4.00 | | | CS-WSP | 2.50 | | | CS-WSP | 4.00 |
| | 4 | CS-WSP | 4.00 | | | | | | | CS-WSP | 4.00 |
| | 5 | | | | | | | | | | |
| | 6 | | | | | | | | | | |
| | 7 | | | | | | | | | | |
| ACTUAL BWP LENGTH (ft) | | 16.00 | | 8.00 | | 9.00 | | 8.00 | | 16.00 | |
| ACTUAL ≥ REQUIRED | | YES | | YES | | YES | | YES | | YES | |
| SPACE: BWPs ≤ 20' APART | | YES | | YES | | YES | | YES | | YES | |
| # of BWPs: Length of BWL (ft) | | 70.5 | | 27 | | 34 | | 20.5 | | 58 | |
| # of BWPs: BWP 1 ≤ 16', 2 > 16' | | YES | | YES | | YES | | YES | | YES | |
| ENDS: BWP WITHIN 10' OF END | | YES | YES | YES | YES | YES | YES | YES | YES | YES | YES |
| ENDS: CONTINUOUS END CONDITION | | 3 | 5 | 3 | 3 | 1 | 5 | 3 | 4 | 3 | 5 |
| BWL COMPLIANCE PASS-FAIL | | PASS | | PASS | | PASS | | PASS | | PASS | |

**WALL BRACING NOTES:**

1. THIS MODEL HAS BEEN DESIGNED TO RESIST THE LATERAL FORCES AS STATED IN THE DESIGN CRITERIA ON COVER SHEET

2. WALL BRACING METHOD TO BE CONTINUOUS SHEATHING - WOOD STRUCTURAL PANEL ( CS-WSP), U.N.O.
3. ALL PANELS TO BE 7/16" OSB SHEATHING OVER 2X4 STUDS & 16" O.C. WITH DOUBLE TOP PLATE & SINGLE BOTTOM PLATE. SHEATHING TO EXTEND FROM BOTTOM EDGE OF BOTTOM PLATE TO TOP EDGE OF LOWER DOUBLE PLATE.
4. NAILING PATTERN AND FASTENERS SHALL CONFORM TO IRC 2018 CODE.

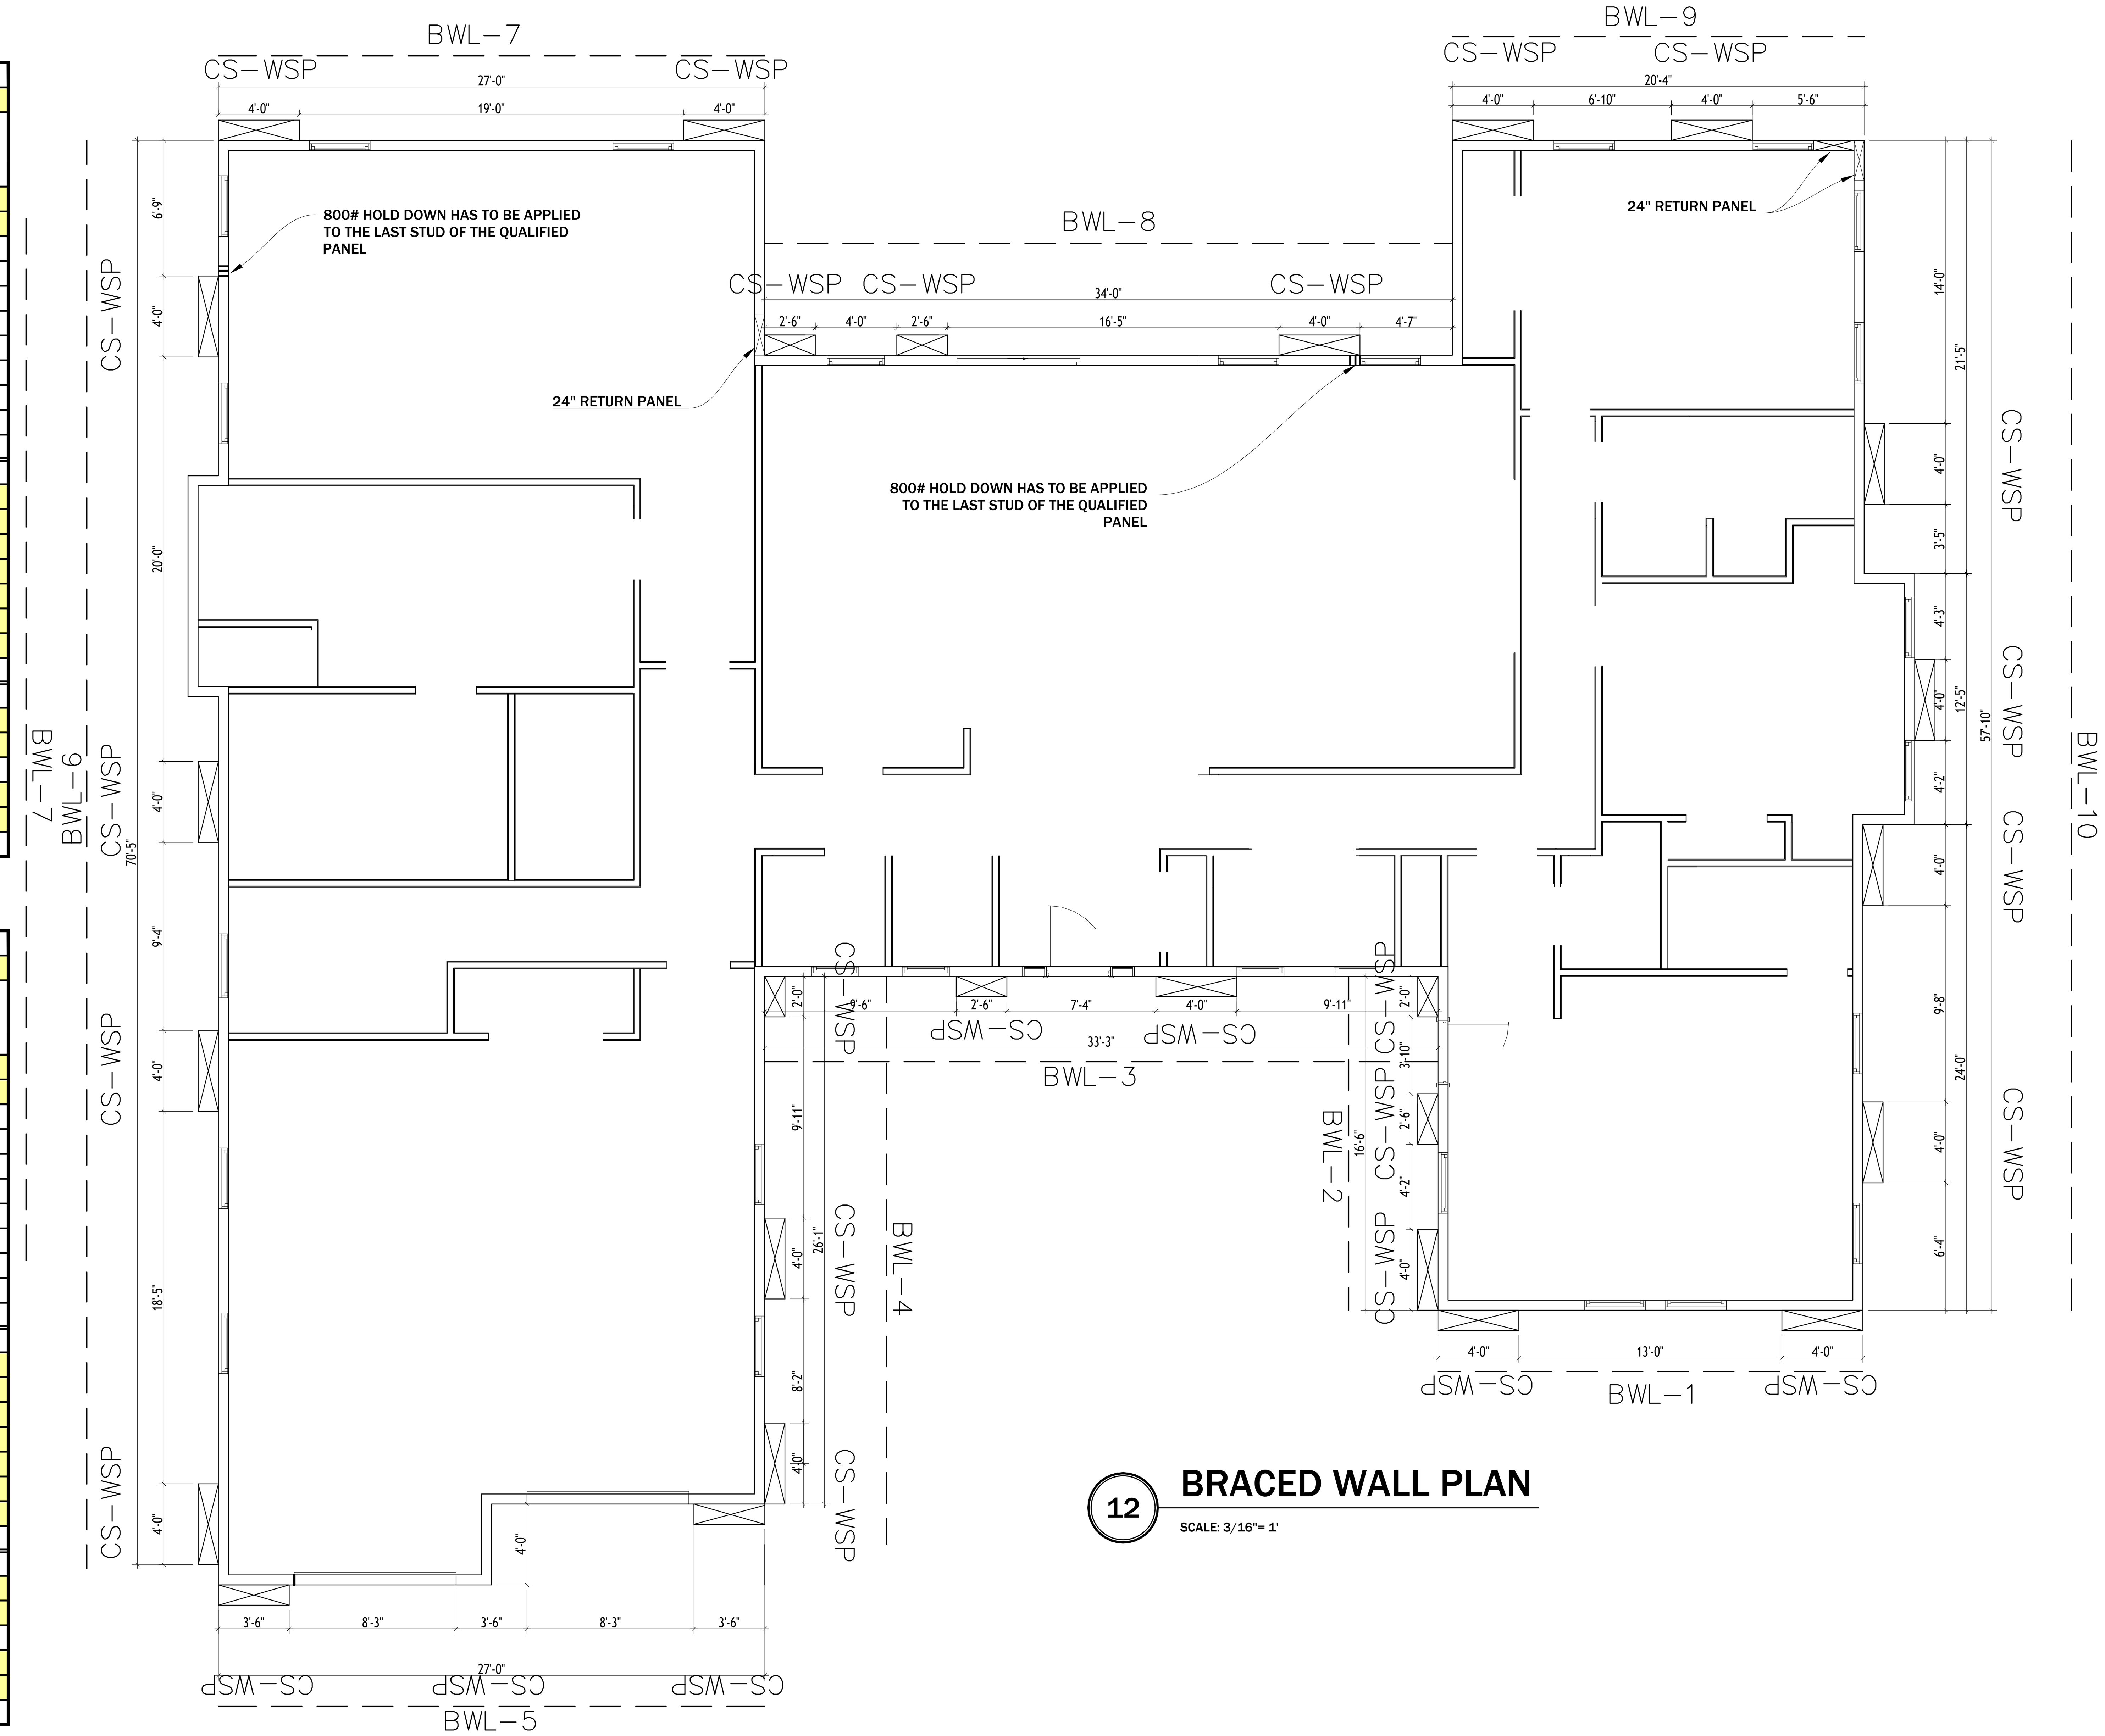


12 **BRACED WALL PLAN**

SCALE: 3/16"= 1'

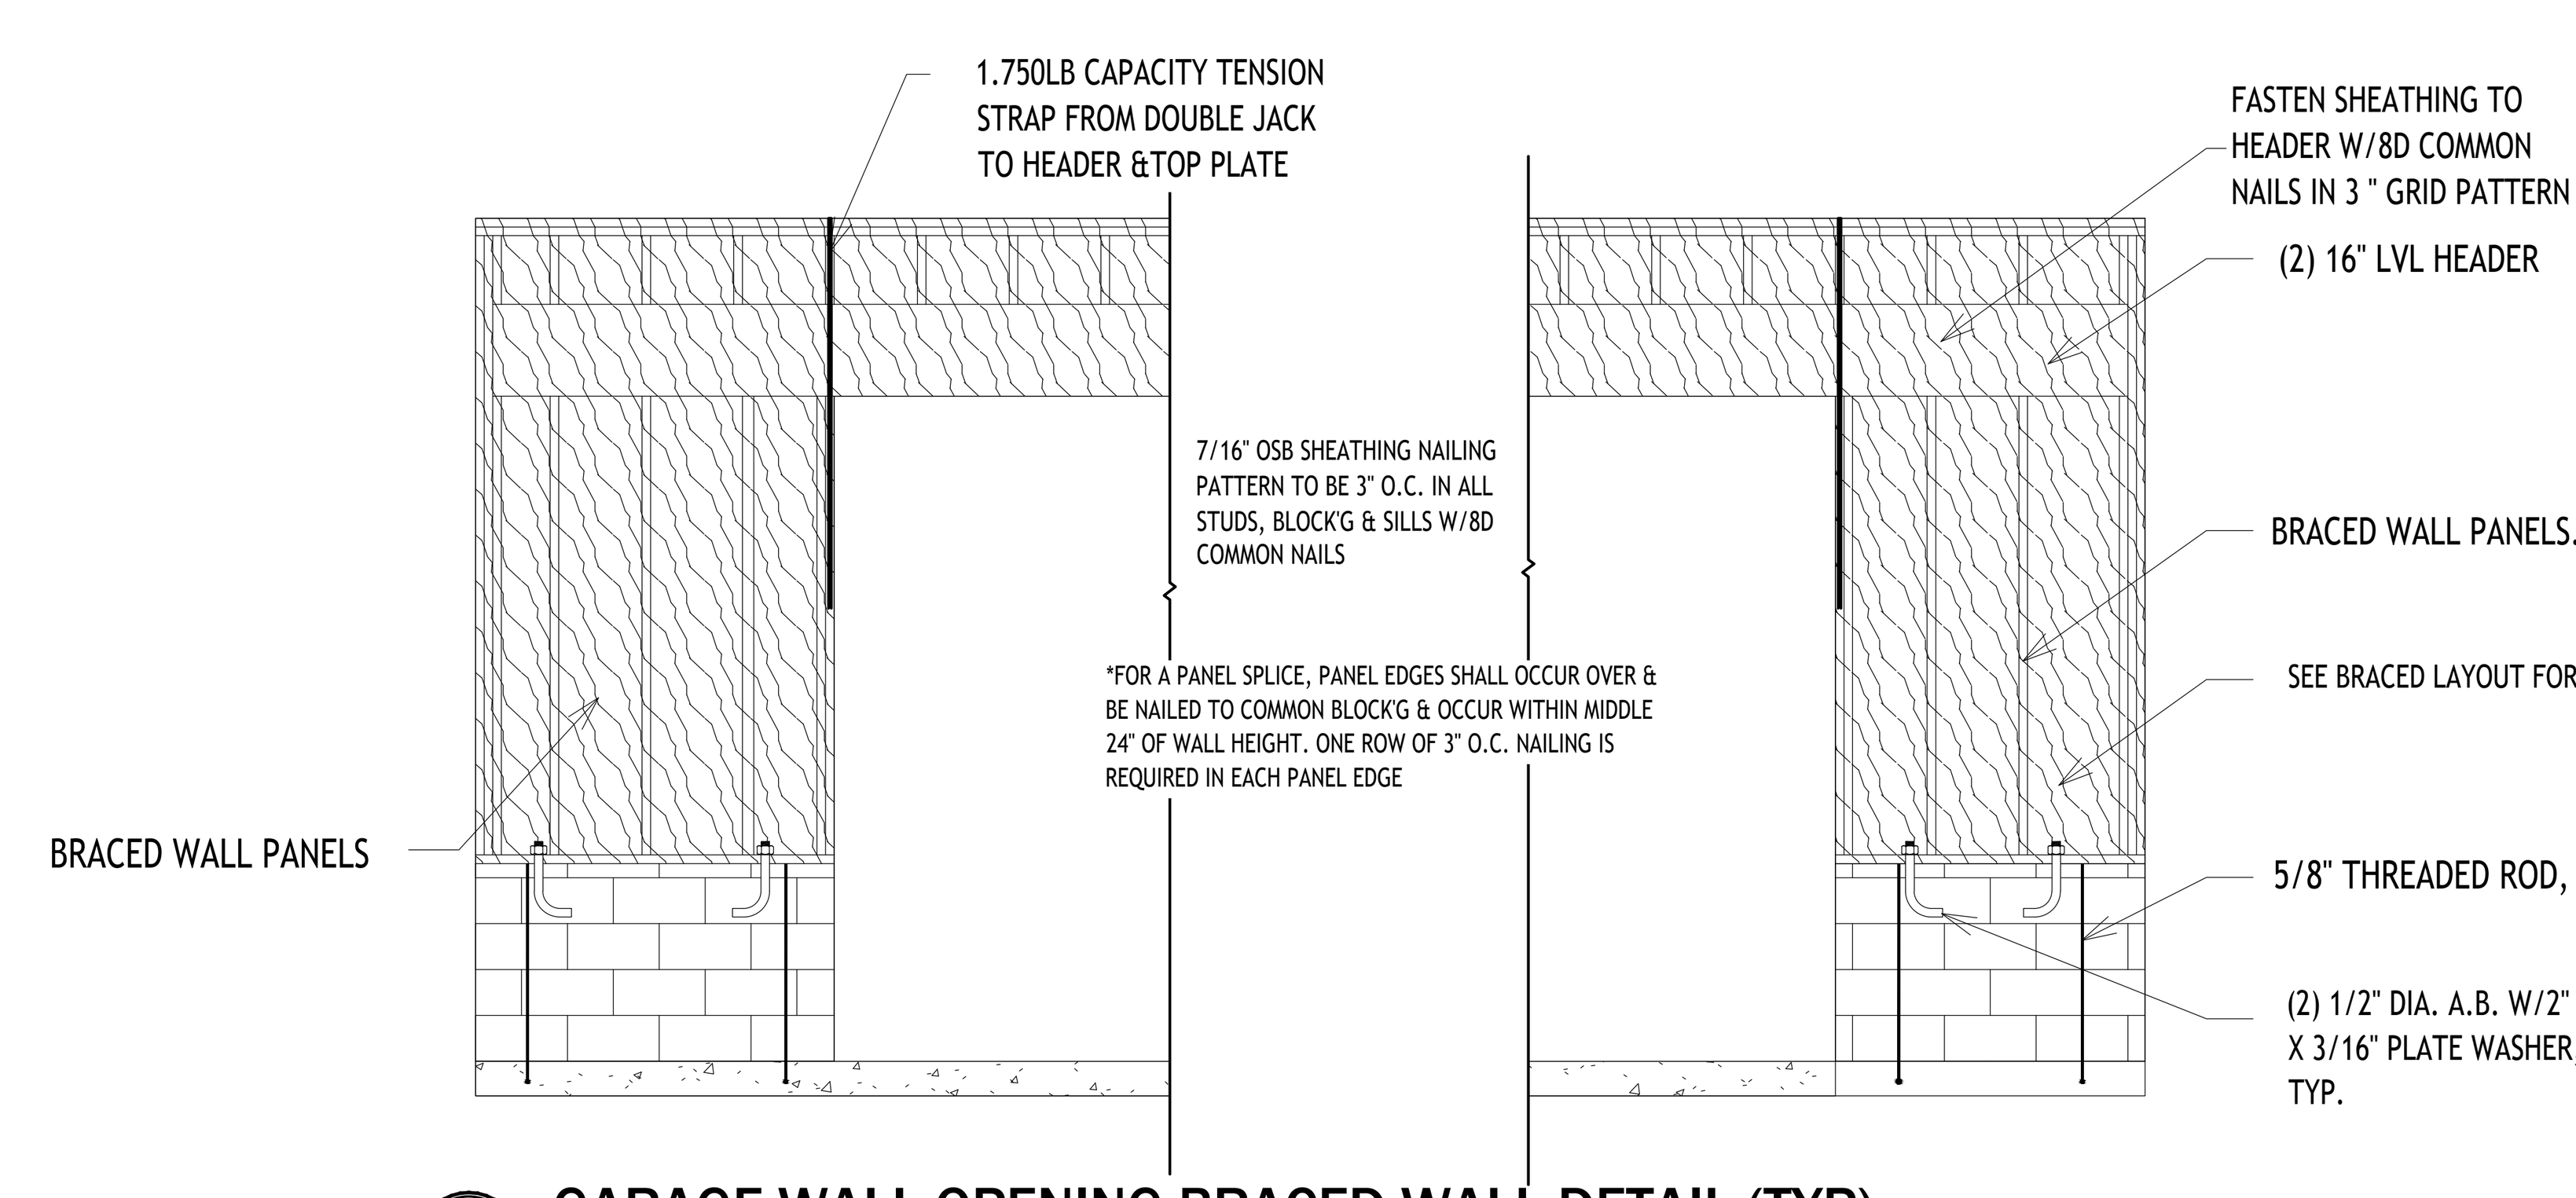


12.1 **GARAGE WALL OPENING BRACED WALL DETAIL (TYP)**

SCALE: NTS

**16-32 DRAFTING, LLC**
2430 WESTWOOD AVE, SUITE 202
RICHMOND, VA 23230

**THE VASQUEZ, RESIDENCE**

1ST FLOOR BRACED WALL PLAN
5019 JESSUP RD, RICHMOND, VA 23234

DRAWN BY:

GAH

| # | REV.DATE |
|---|---|
| | |
| | |
| | |
| | |
| | |

**A9**